
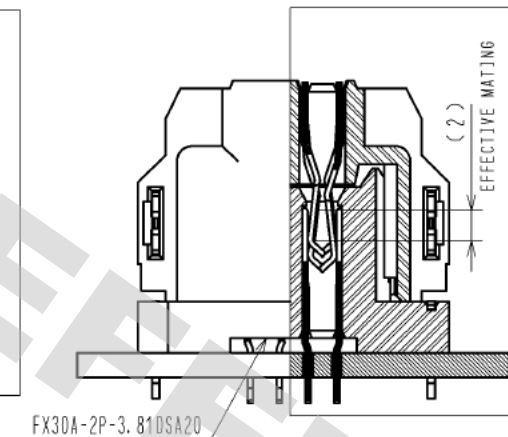
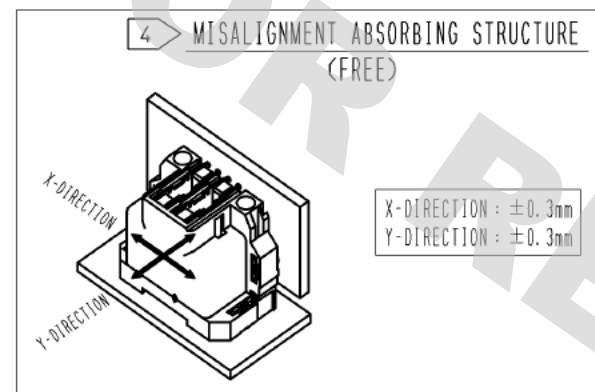



- NOTE 1 THIS PRODUCT IS PACKAGED IN TRAY. (56pcs/TRAY)
2 BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS WHICH DOESN'T AFFECT QUALITY LEVEL.
ALSO, BLACK SPOT COULD BE OBSERVED ON THE SURFACE OF HOUSING.
3 EACH CONTACT NO. IS APPLIED TO ADJACENT 6 LEADS AS A LINE.
4 MISALIGNMENT ABSORBING RANGE: $\pm 0.3\text{mm}$ max.
5 THE DIMENSION IN PARENTHESES ARE FOR REFERENCES.
6 POSSIBLE SHORT SHOT AT THE INDICATED AREA DOES NOT AFFECT THE PRODUCT QUALITY.

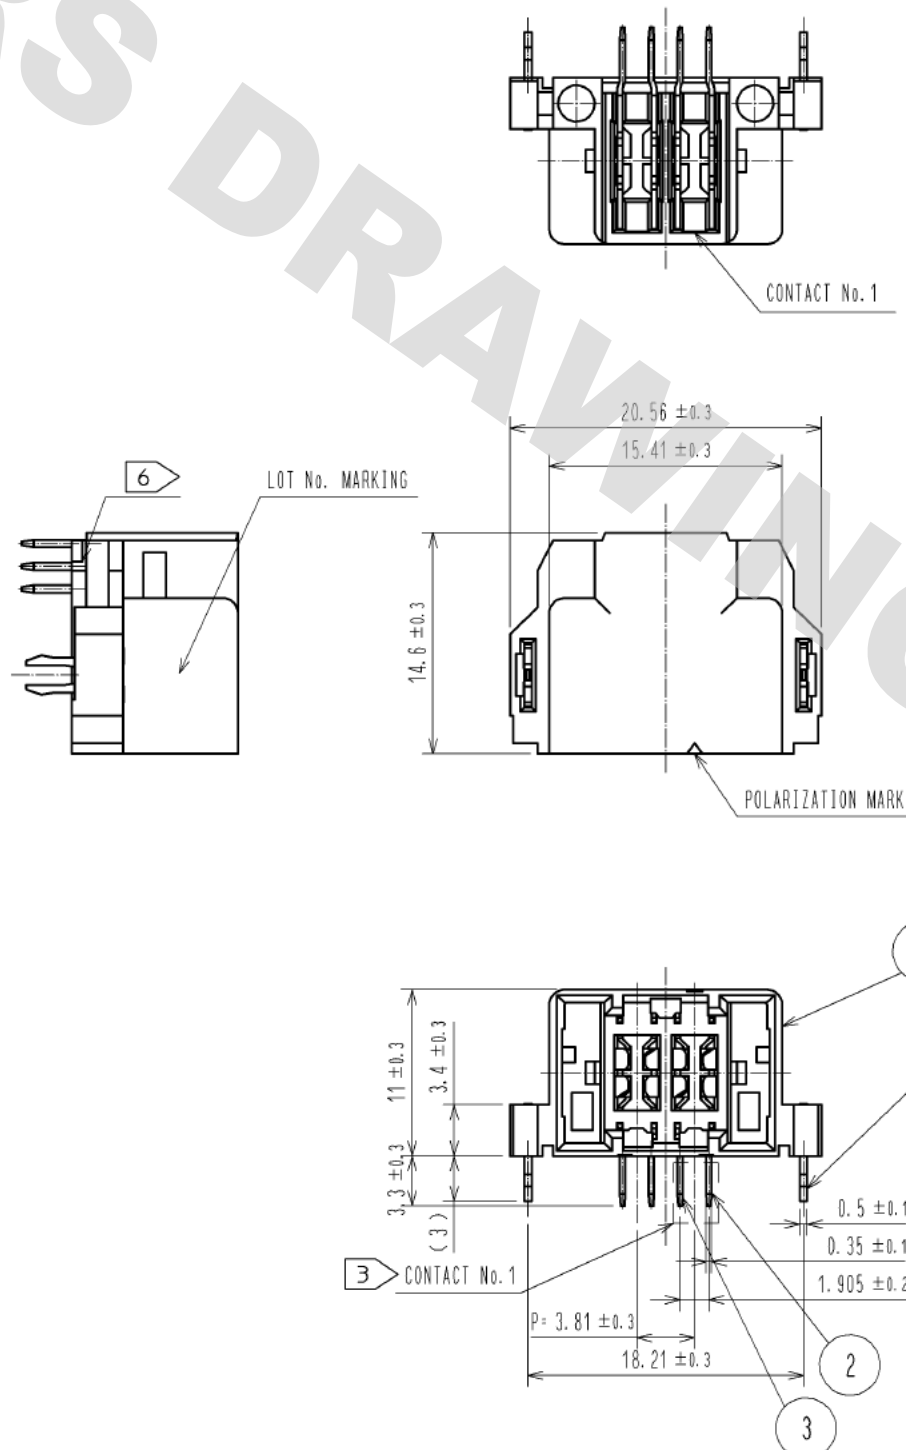


2		COPPER ALLOY	CONTACT AREA:GOLD-PLATING $0.1\mu\text{m}$	5	POLYSTYRENE	
1		POLYAMIDE	LEAD AREA:TIN-PLATING $1.0\mu\text{m}$	4	PHOSPHOR BRONZE	TIN-PLATING $3.0\mu\text{m}$
			UNDER PLATING:NICKEL $1.0\mu\text{m}$	3	COPPER ALLOY	UNDER PLATING:NICKEL $1.0\mu\text{m}$
			BLACK UL94V-0			CONTACT AREA:GOLD-PLATING $0.1\mu\text{m}$
NO.		MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS		mm	SCALE	COUNT		DESCRIPTION OF REVISIONS
			2 : 1			DESIGNED
						CHECKED
						DATE
APPROVED		HS. OKAWA	12.06.15	DRAWING NO.		EDC3-341816-00
CHECKED		KI. HIROKAWA	12.06.15	PART NO.		FX30A-2S-3.81DS
DESIGNED		DK. AIMOTO	12.06.14	CODE NO.		CL570-2500-6-00
DRAWN		DK. AIMOTO	12.06.14			

DRAWING FOR REFERENCE: This is subject to change without notice
05/31/2013


RECOMMENDED HOLE PATTERN DIMENSION OF PCB(5:1)
(CONNECTOR MOUNTING SIDE, PCB THICKNESS: t=1.6mm)

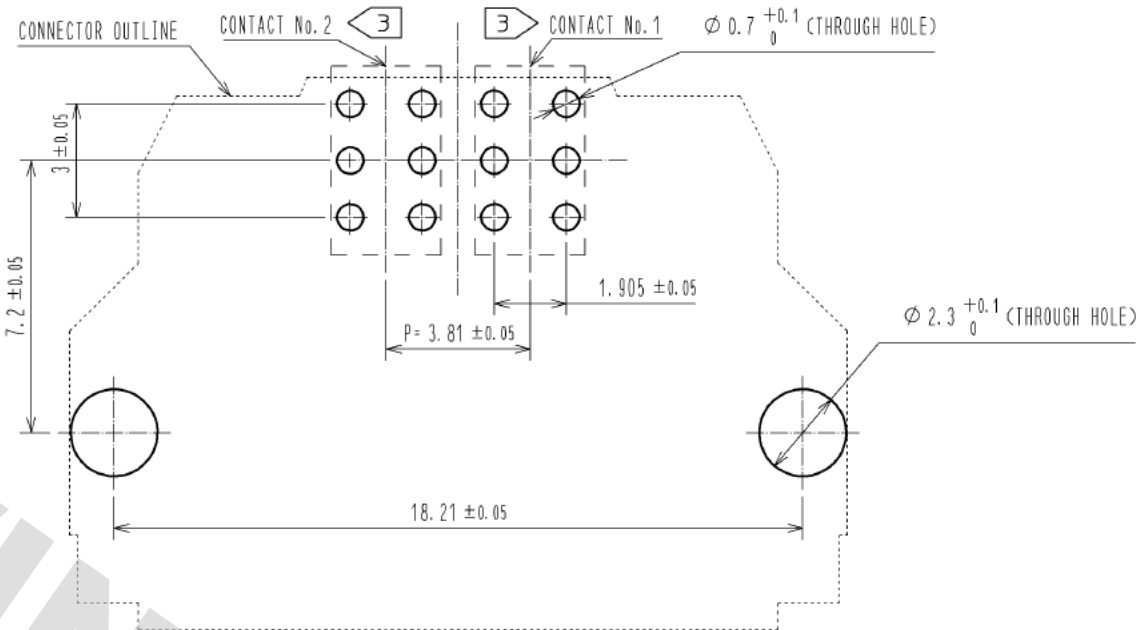

DRAWING FOR PACKAGING(1:2)

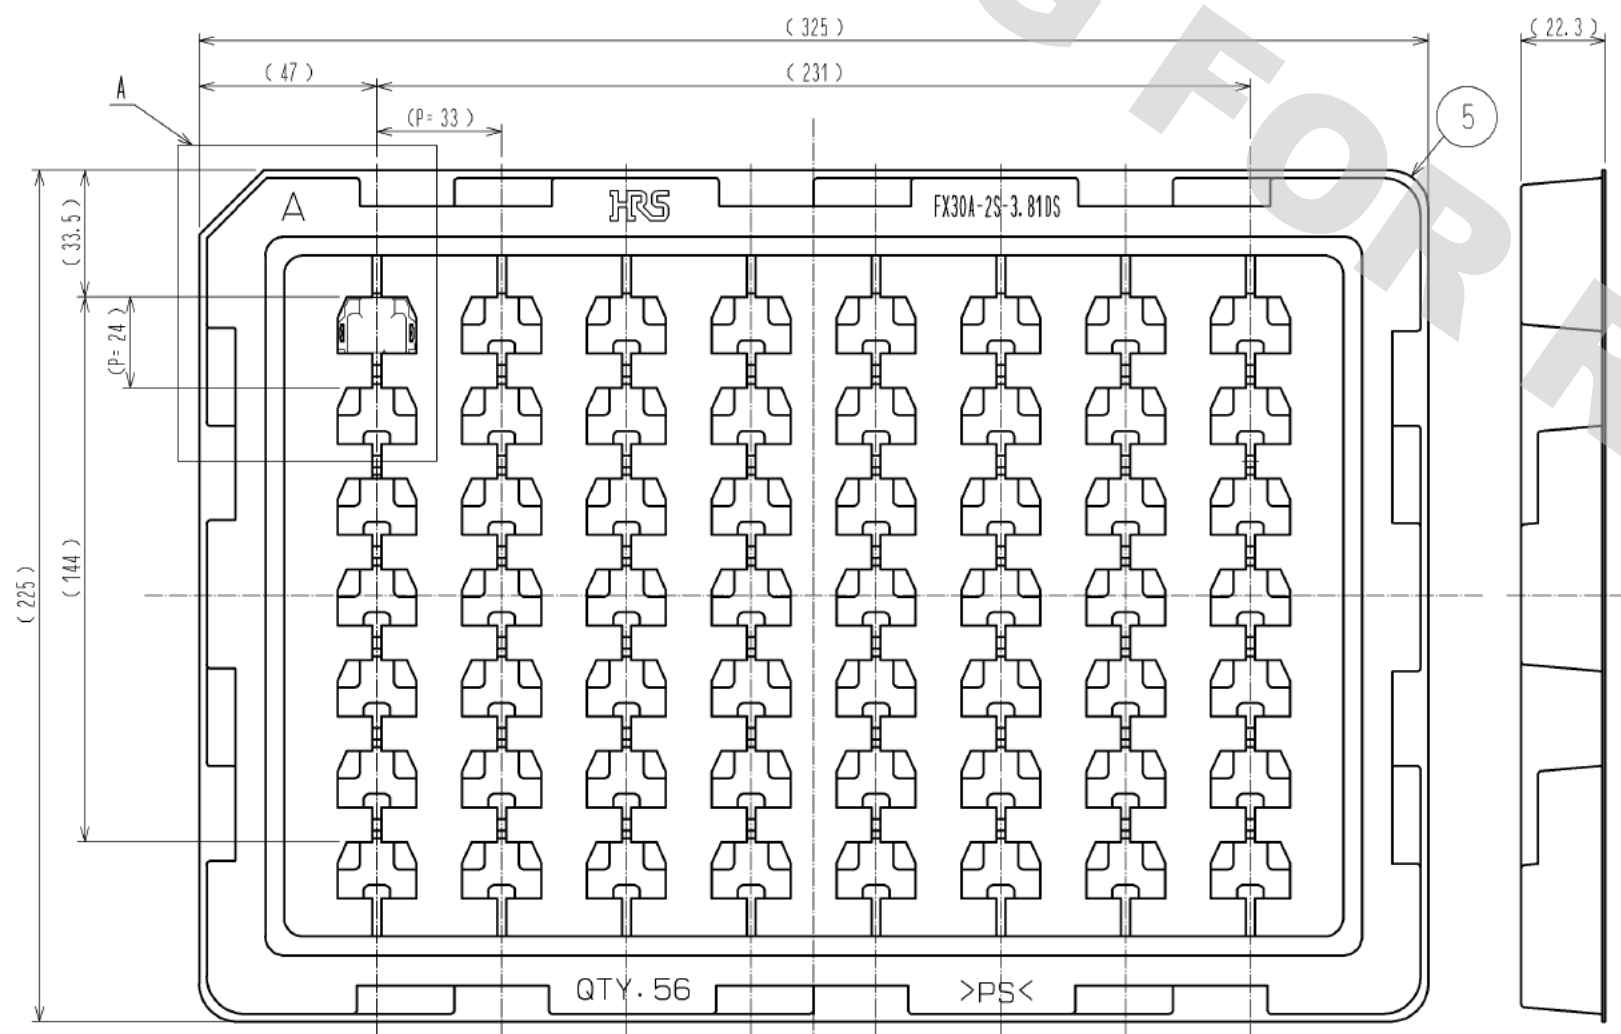

A(1:1)

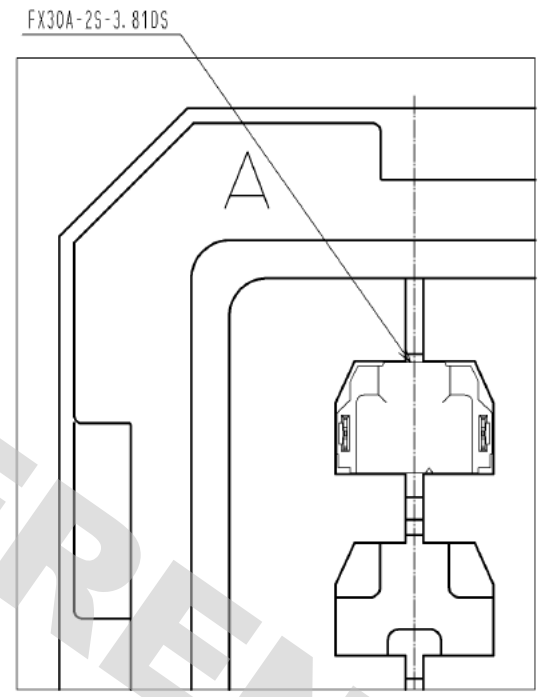

HRS	DRAWING NO.	EDC3-341816-00
	PART NO.	FX30A-2S-3.81DS
	CODE NO.	CL570-2500-6-00
		\triangle 2/2