


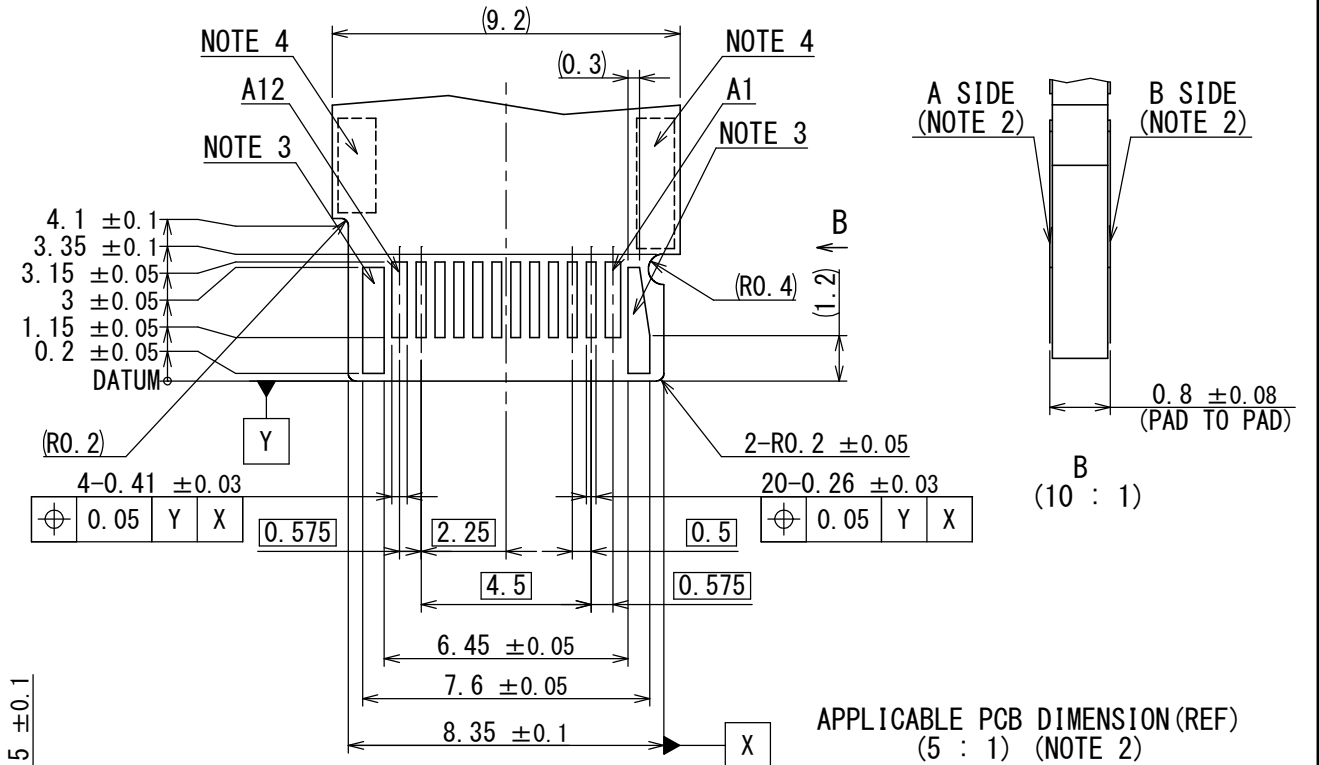

NOTE 1. THERE COULD BE UNRECOGNIZABLE DIFFERENCES FROM ACTUAL PRODUCT DUE TO PROCESS CONVENIENCE BUT NOT IMPACT ON THE FUNCTION.


NOTE 2. PCB PADS CONFIGURATION BE SAME BETWEEN A SIDE AND B SIDE.

NOTE 3. THERE PADS BE WHERE A CONNECTOR HOLDS PCB. SHALL NOT BE ELECTRICAL USE NOT SOLDERED.

NOTE 4. RECOMMEND TO UTILIZE THE SIDE SHELL TABS BY SOLDERING TO PCB PADS FOR THE MECHANICAL STRENGTH.


NOTE 5. RECOMMEND TO KEEP THE CAP STAY IN PLACE UNTIL ALL THE PROCESSES DONE. THE CAP PREVENTS A CONNECTOR FROM DEFORMED AND CONTAMINATION DURING PROCESSES SUCH AS PADDLE CARD ASSEMBLY AND CABLE ASSEMBLY.

NOTE 6. LOT NUMBER IS MARKED AS INDICATED.

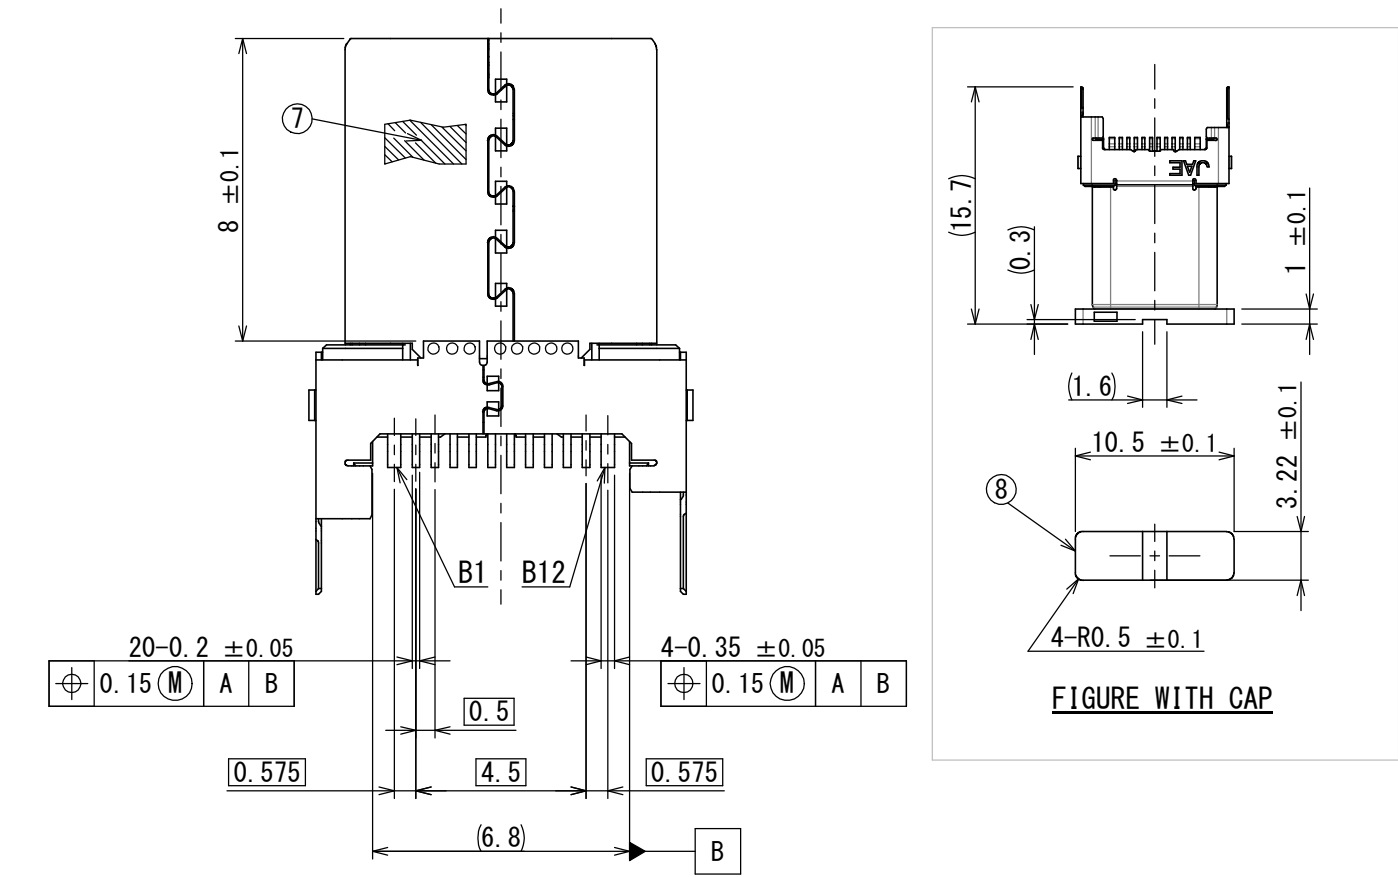

8	CAP	1	HEAT RESISTING PLASTIC	(BLACK)	
7	TAPE	2	POLYIMIDE	-	
6	SHELL	1	STAINLESS STEEL	NICKEL PLATING	
5	GROUND SPRING	2	STAINLESS STEEL	NICKEL PLATING	
4	LOCK	1	STAINLESS STEEL	-	
3	INSULATOR B	2	HEAT RESISTING PLASTIC	(BLACK)	
2	INSULATOR A	1	HEAT RESISTING PLASTIC	(BLACK)	

1	CONTACT	24	COPPER ALLOY	CONTACT AREA: GOLD FLASH OVER PALLADIUM-NICKEL OVER NICKEL SOLDER TAILS: GOLD FLASH OVER NICKEL	
符号 NO.	名 称 DESCRIPTION	個 数 QTY.	材 料 MATERIAL	仕 上 FINISH	備 考 REMARKS

仕様書 (SPECIFICATION)		第1版 (ORIGINAL DATE)		尺度 (SCALE)		シリーズ (SERIES)		日本航空電子工業株式会社 JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.
JACS-30353 J AHL-30353		16/MAR/2015		5:1		DX07		
		製図 DR.		名称 (TITLE)				
一般公差 (GENERAL TOLERANCE)		担当 CHK.		DX07P024MJ1				
寸法 (DIMENSION)		角度 (ANGLES)		査閲 APPD.				図面番号 (DRAWING NO.) SJ115803
±0.8		×° ±		承認 APPD.				
× ±0.4		×°×' ±		T. MASUMOTO				
×× ±0.1								
××× ±		単位 (UNIT) : mm				質量 (MASS)		
								

WISDOM承認 2015/03/21