



NOTES:
1. ALL PARTS TO BE BULK PACKED.
2. CONTACTS ARE INSTALLED IN CONNECTOR.
3. FILL REAR END OF CONNECTOR WITH BLACK EPOXY


ASSY P/N	CONTACT QTY.	"X" DIM.	EPOXY
7282-2PG-3ES	2	.153 [3.9mm]	YES
7282-3PG-3ES	3	.112 [2.8mm]	
7282-4PG-3ES	4	.112 [2.8mm]	
7282-5PG-3ES	5	.155 [3.9mm]	
7282-6PG-3ES	6	.112 [2.8mm]	
7282-7PG-3ES	7	.155 [3.9mm]	
7282-8PG-3ES	8	.155 [3.9mm]	

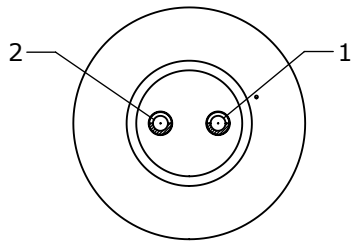


WIRING END
ASSY: 7282-2PG-3ES




WIRING END
ASSY: 7282-3PG-3ES




WIRING END
ASSY: 7282-4PG-3ES




WIRING END
ASSY: 7282-5PG-3ES

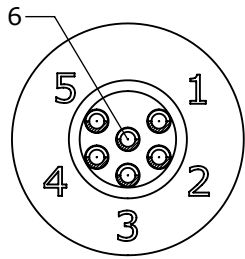


WIRING END
ASSY: 7282-6PG-3ES




WIRING END
ASSY: 7282-7PG-3ES



WIRING END
ASSY: 7282-8PG-3ES


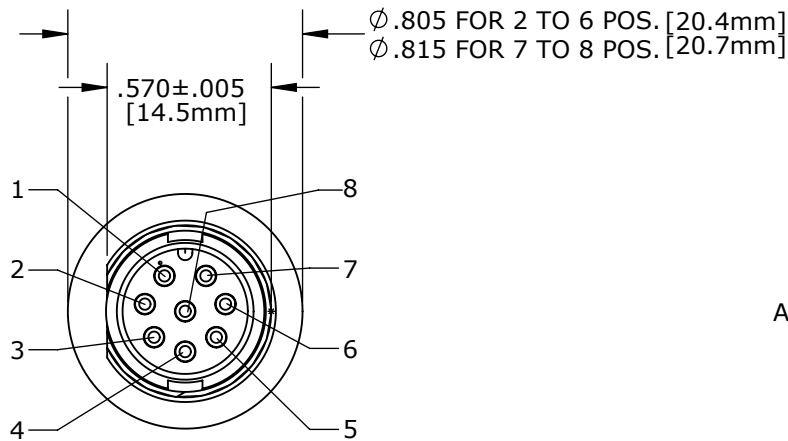


MATING FACE
ASSY: 7282-8PG-3ES SHOWN

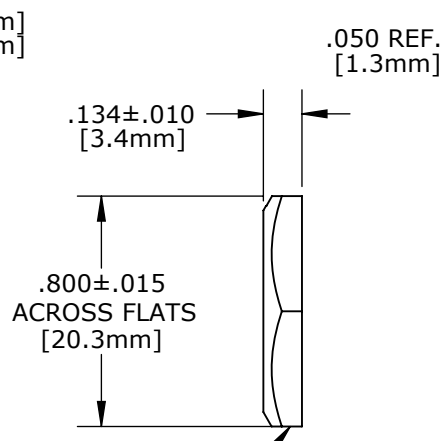


HEX NUT
MAT'L: THERMOPLASTIC, BLACK

GASKET
MAT'L: RUBBER, BLACK

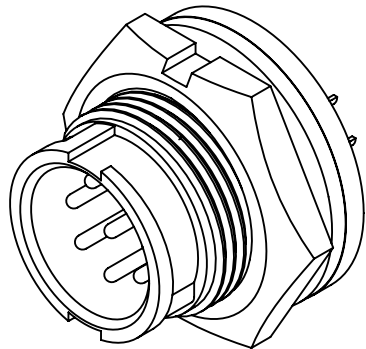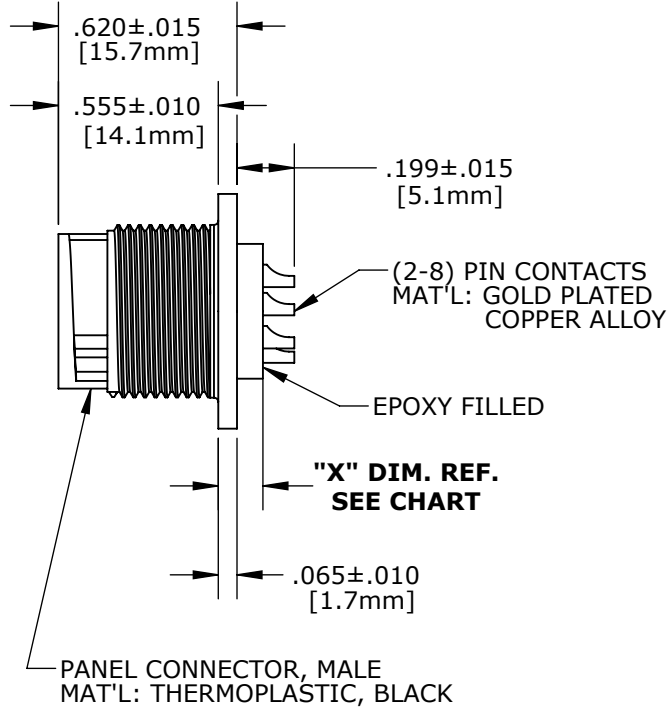

ASSEMBLED VIEW
FOR CUSTOMER REFERENCE ONLY
7282-8PG-3ES SHOWN

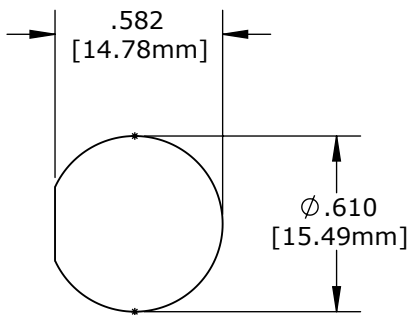

RECOMMENDED
PANEL CUT-OUT
TOLERANCE: ±.003

CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____

DATE: _____

C	PD	10-03-12	UPDATE MANUFACTURING DRAWING PER ECR 8312	
B	AN	08-13-12	ADDED "X" DIM., CONTACT HEIGHT DIM. 0.199, MATERIALS, TOLERANCES, AND FLAT DIM. 0.570; ADDED CUT-OUT VIEW AND ASSEMBLED VIEW; SHOWN WIRING VIEWS INSTEAD OF MATING FACE VIEW; UPDATED DIM.'S. PER ECR 8181	
A	BZ	05-08-09	DRAWING CREATED PER DOR 09-E149SL	
REV.	INIT.	DATE	DESCRIPTION	
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION." UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: BZ	DATE: 05-08-09
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			CHECKED BY:	
- CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX			APPROVED BY:	
			SCALE: 1 OF 1	SHEET: 1 OF 1
			FILE: 7282-XPG-3ES	DIRECTORY: SLW
			TITLE: PANEL MOUNT ASSEMBLY (2-8) PIN CONTACTS MINI-CON-X WITH EPOXY STANDARD PRODUCT	
			CUSTOMER: 7282-XPG-3ES	REV: C

DIMENSIONS IN BRACKET [] ARE METRIC.

RoHS COMPLIANT