THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.




**HTCT6X-6X**




**HTCT2-2**

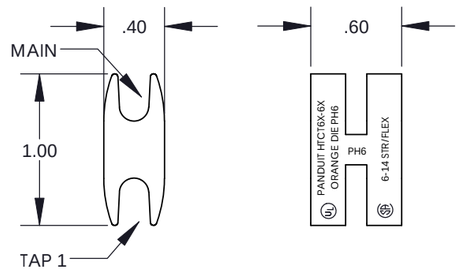


**HTCT250-2**

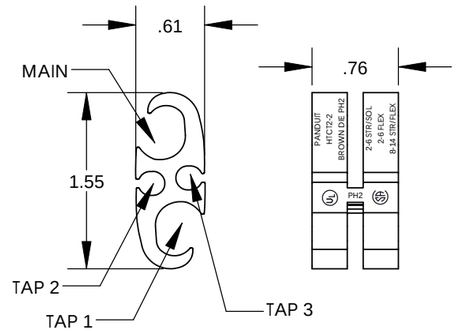


**HTCT250-250**

| | | | | | | | | PANDUIT INSTALLATION TOOLS | |
|---|---|---|---|---|---|---|---|---|---|
| H-TAP PART NUMBER | H-TAP & CLEAR COVER KIT PART NUMBER | CONDUCTOR SIZES CODE WIRE (FLEX CABLE) | | | | WIRE STRIP LENGTH | CRIMP DIE COLOR CODE | CT-930<br>CT-930CH<br>CT-940CH*<br>CT-2930<br>CT-2931<br>CT-2940* | CT-920<br>CT-920CH<br>CT2920 |
| | | MAIN | TAP 1 | TAP 2 | TAP 3 | | | CRIMP DIE NO. / DIE INDEX NO. (# OF CRIMPS = 1) | |
| HTCT6X-6X-1 | HTWC6X-6X-1 | 6-14<br>(6-14) | 6-14<br>(6-14) | --- | --- | 11/16" | ORANGE | CD-920H-6<br>PH6 | CD-920H-6<br>PH6 |
| HTCT2-2-1 | HTWC2-2-1 | 2-6 STR/SOL<br>(2-8) | 2-6 STR/SOL<br>(2-8) | 8-14<br>(8-14) | 8-14<br>(8-14) | 13/16" | BROWN | CD-920H-2<br>PH2 | CD-920H-2<br>PH2 |
| HTCT250-2-1 | HTWC250-2-1 | 250-2<br>(4/0-2 | 2-6 STR/SOL<br>(2-8) | 8-14<br>(8-14) | --- | 1" | PURPLE | CD-930H-250<br>PH25 | --- |
| HTCT250-250-1 | HTWC250-250-1 | 250-2<br>(4/0-2 | 250-2<br>(4/0-2 | --- | --- | 1" | PURPLE | CD-930H-250<br>PH25 | --- |

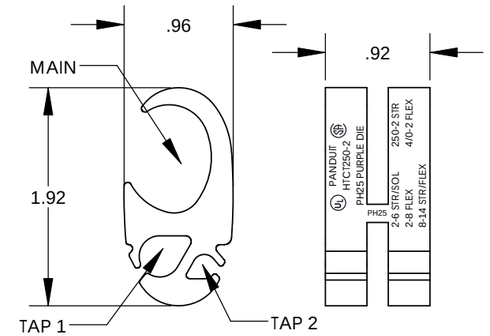*REQUIRES CD-940-DA ADAPTER

NOTES:

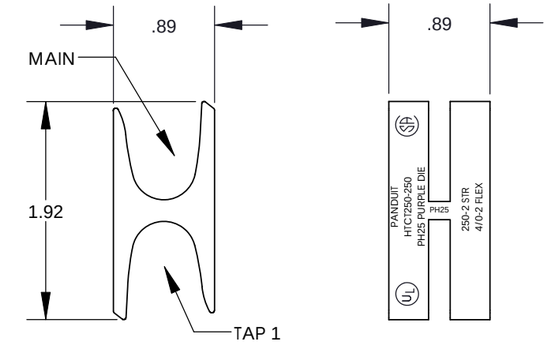1. MATERIAL: ANNEALED HIGH CONDUCTIVITY COPPER, TIN PLATED
2. FOR USE WITH COPPER OR TIN PLATED COPPER CONDUCTORS ONLY.
3. ACCOMODATES CODE CABLE, SOLID WIRE (WHERE SPECIFIED), FLEX LOCOMOTIVE (DLO), AND FLEX CLASSES G, H, & I
4. ANY SINGLE TAP OR COMBINATION OF TAPS MAY BE USED IN CONJUNCTION WITH MAIN WIRE PORT.
5. UL LISTED AND CSA CERTIFIED FOR APPLICATIONS UP TO 600V. TEMPERATURE RATING 90˚C MAX.
6. FLAME RETARDANT CALBE TIES (UL94 V-0 RATED NYLON WITH L.O.I. = 28MIN.) ARE PROVIDED WITH THE TAPS TO RETAIN THE WIRES IN POSITION FOR CRIMPING.
7. TO ORDER H-TAP WITH INSULATING COVERS SEE PART NUMBERS IN TABLE.
8. H-TAPS AND KITS ARE PACKAGED INDIVIDUALLY. (-1 PACKAGING CODE)

| REV | DATE | BY | CHK | DESCRIPTION | ECN | -R | SUP |
|---|---|---|---|---|---|---|---|
| 05 | 3/11 | JHNU | JHNU | REMOVED HTCT8-8 & HTCT6-6, ADDED HTCT6X-6X<br>REVISED WIDTH ON HTCT250-250: .89 WAS .90 | N41379BC-C41379 | FLD | FLD |
| 04 | 2/09 | JHNU | JHNU | CONVERTED DRAWING TO SOLIDWORKS<br>REMOVED HTCT250-8-1 & HTWC250-8-1 FROM DRAWING | | | |
| 03 | 1/05 | JHNU | JHNU | ADDED CT-2930 TO THE TABLE | | | |
| 02 | 11/04 | RGB | RGB | ADDED CT-2931 TO THE TABLE | 12276 | | |
| 01 | 5/03 | RWK | RLS | REMOVED BLACK COVER KIT NUMBERS | 10818 | | |
| 00 | 4/03 | RWK | RLS | DRAWING RELEASED | 10794 | | |

PANDUIT CORP. TINLEY PARK, ILLINOIS

H-TAP SERIES
COPPER COMPRESSION SMALL TAPS
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:
(.X) ±X (.XXX) ±X
(.XX) ± .03 ANGLES ±X

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION

DRAWN BY RWK
MAT'L:
SCALE NONE
DATE 4/03
CHK'D RLS
DRAWING NO / CAD FILE C41379_05
DWG B SIZE