


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1 2	DIS-C-000490	T.H.E.K	07.01.31	△					..
△				..	△				..
△				..	△				..

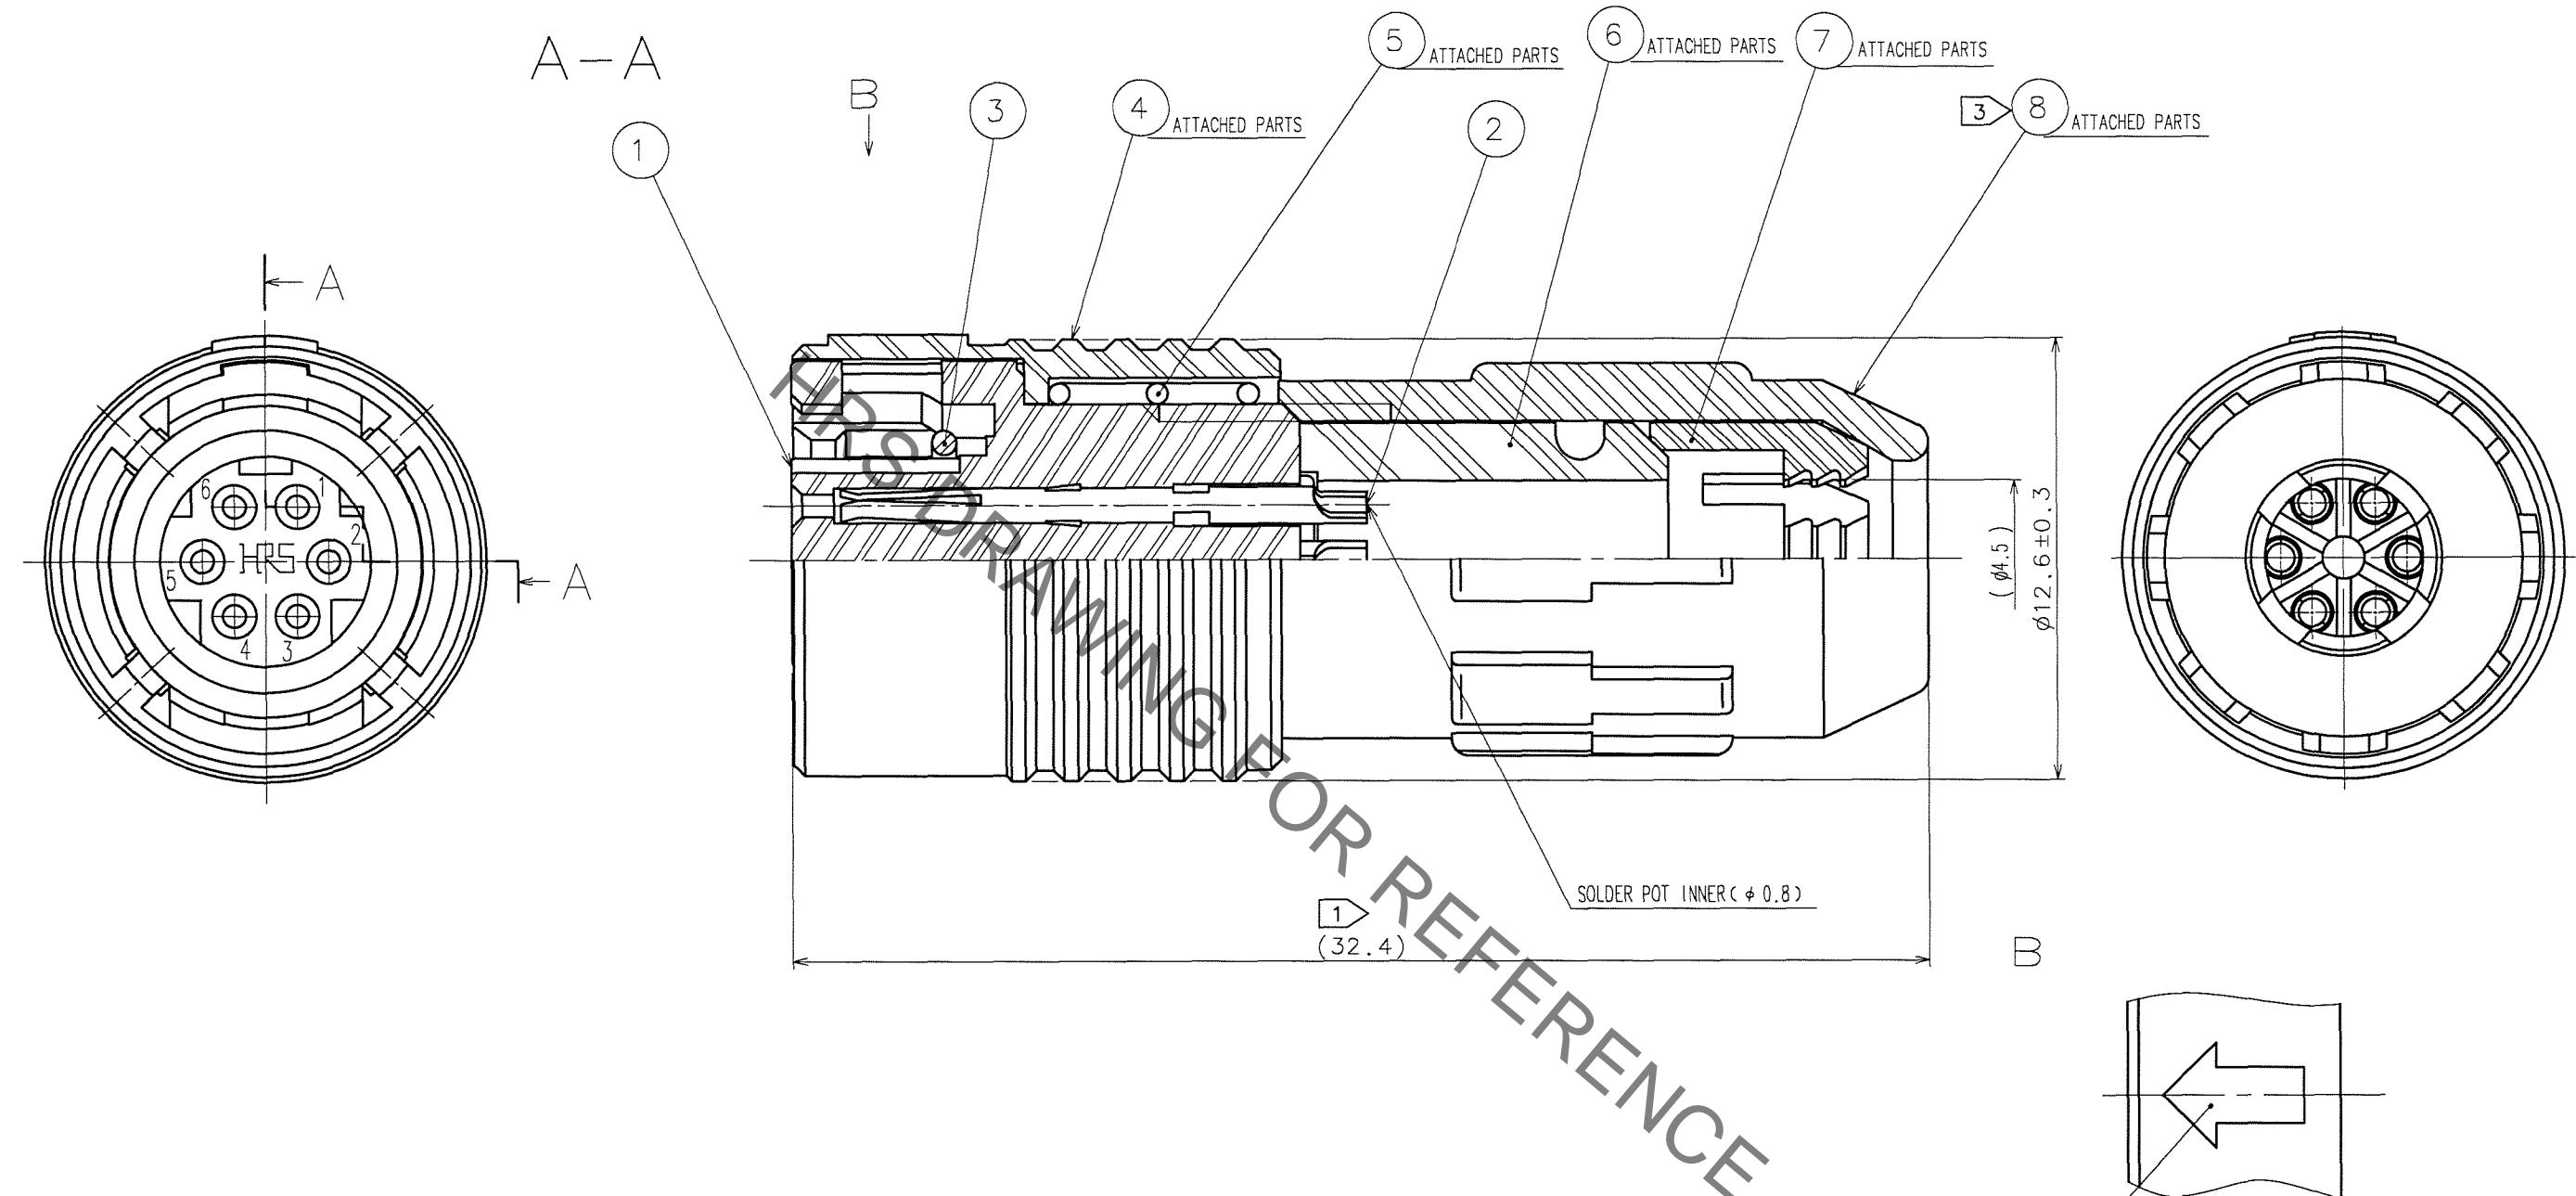

NOTES 1 TOTAL LENGTH BECOMES  $29.8 \pm 1$  WHEN ⑧ IS SCREWED INTO ① COMPLETELY.  
2 TABLE FOR ASSEMBLY AND SOLDERING IS AVAILABLE HR30-6P-6S-T01.

⚠ 3 THE RECOMMENDED CLAMP TORQUE OF REF. NO.⑧ TO BE  $0.5 \text{ N} \cdot \text{m}$ .  
LOCTITE 271, LOCPRIMER 7649, HENKEL JAPAN IS RECOMMENDED TO PREVENT REF. NO.⑧ FROM LOOSENING.  
SPACER FOR ASSEMBLY IS AVAILABLE HR30-6P-T02.

4 SURFACE PLATING: GOLD PLATING 0.2m min.  
UNDER PLATING: NICKEL PLATING 2m min.

⚠ 5 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER,  
DEPENDING ON THE CABLE STRUCTURE.  
PLEASE CONFIRM BEFORE THE USE.

4	PBT	(BLACK)	UL 94V-0	8	PBT	(BLACK)	UL 94V-0
3	SIR	(RED)		7	POLYACETAL	(NATURAL)	
2	BRONZE ALLOY	4		6	CR	(BLACK)	
1	PPS	(BLACK)	UL 94V-0	5	STAINLESS STEEL		
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS	

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	M. HANYU	H. NAGANO	E. KUNII	M. SATO	
	'05. 8. 8	'05. 8. 8	'05. 8. 10	'05. 8. 10	.

