


Dec.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

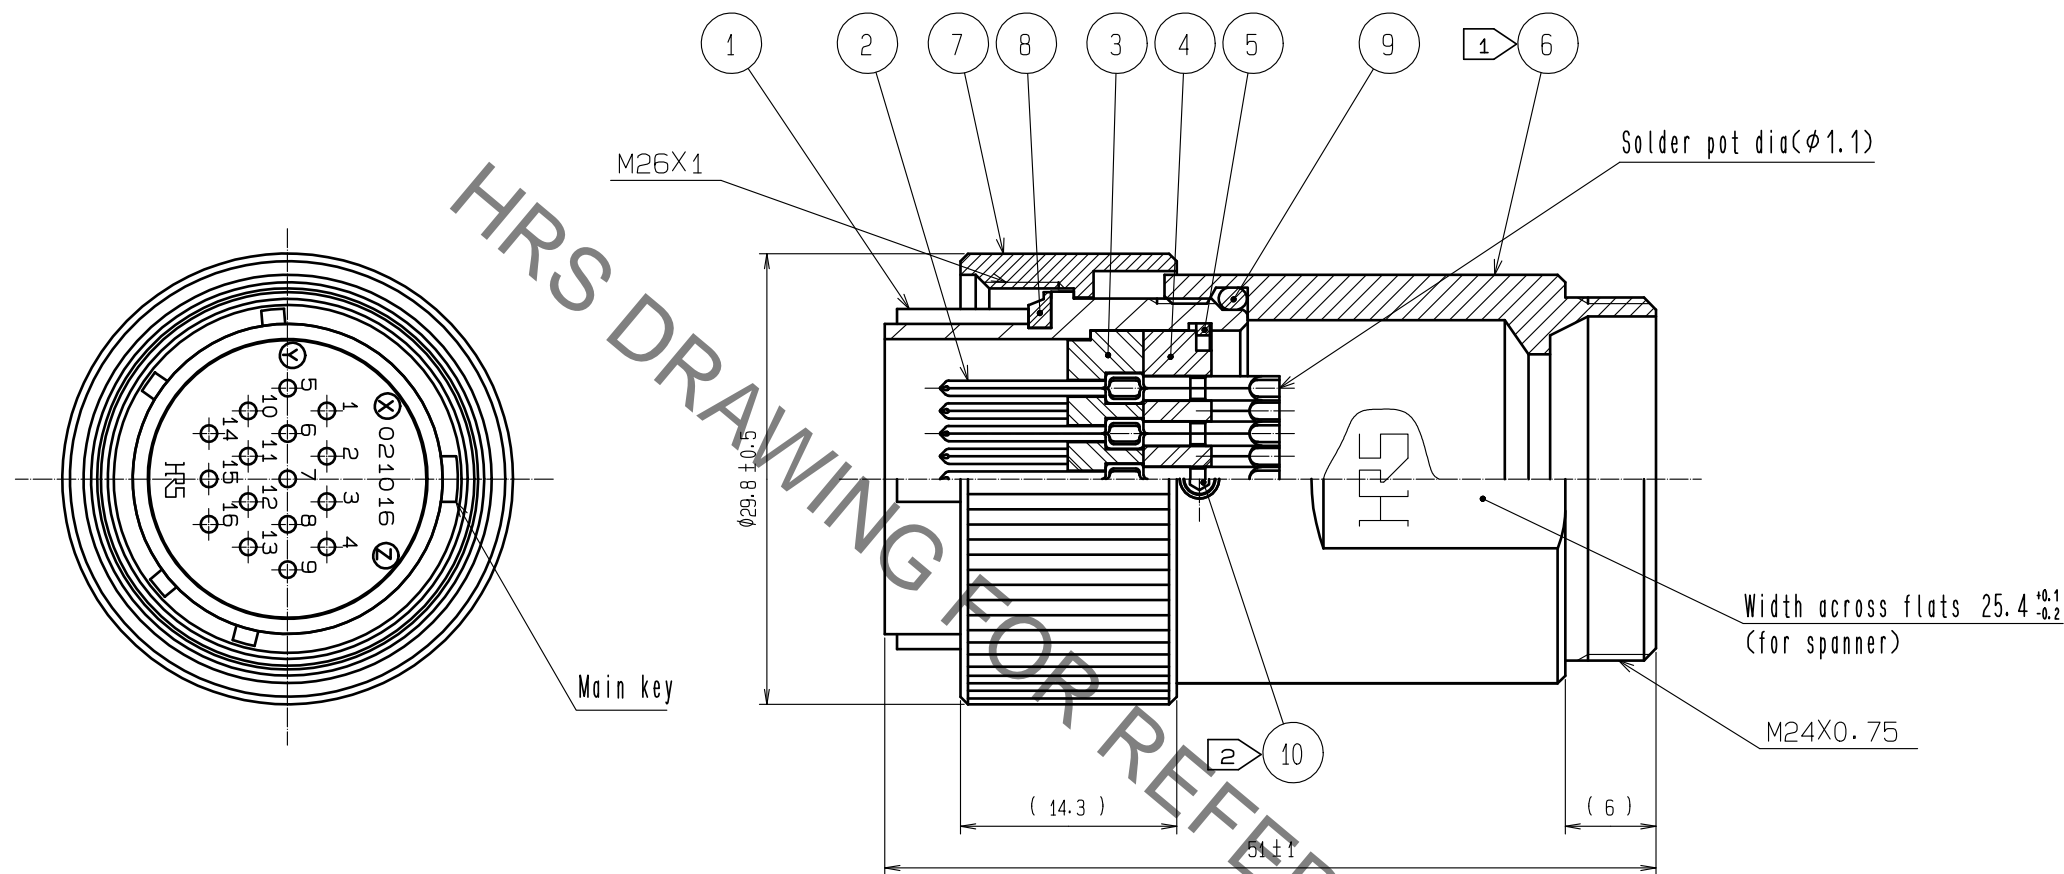

- NOTES
- ① The recommended tightening torque of Ref No. ⑥ : 4 to 4.5 N · m.
 - ② The recommended tightening torque of Ref No. ⑩ : 0.2 to 0.25 N · m.
 - ③ One example of the rotation of REF. No. ⑥ to REF. No. ① is shown.
 - ④ LOCTITE 263 HENKEL JAPAN or equivalent is recommended to prevent REF. No. ①, ⑥ and ⑩ for loosening.
 - ⑤ This products to be used with cable clamp, JR21WCC-※
※Designate diameter(mm) of applicable cable.
 - ⑥ The cable pull and twisting strength, waterproof tightness and other characteristics may differ, depending on the cable structure.
Please confirm before the use.

5	PHOSPHOR BRONZE	NICKEL PLATING	10	STAINLESS STEEL	HEX SOCKET SET SCREW HEX : 1.27
4	PHENOL FORMALDEHYDE	(BLACK) UL94V-0	9	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)
3	PHENOL FORMALDEHYDE	(BLACK) UL94V-0	8	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)
2	COPPER ALLOY	SILVER PLATING 3μm min	7	BRASS	BLACK CHROME PLATING
1	ALUMINUM ALLOY	BLACK CHROME PLATING	6	BRASS	BLACK CHROME PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT	DESCRIPTION OF REVISIONS	
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HY. KOBAYASHI	18.02.26	DRAWING NO.	EDC-110563-31-00
		CHECKED : HY. KOBAYASHI	18.02.26	PART NO.	JR21WP-16P(31)
		DESIGNED : TH. KAMEYA	18.02.22	CODE NO.	CL114-2006-9-31
		DRAWN : MK. INOUE	18.02.13		
		DESIGNED	CHECKED	DATE	