


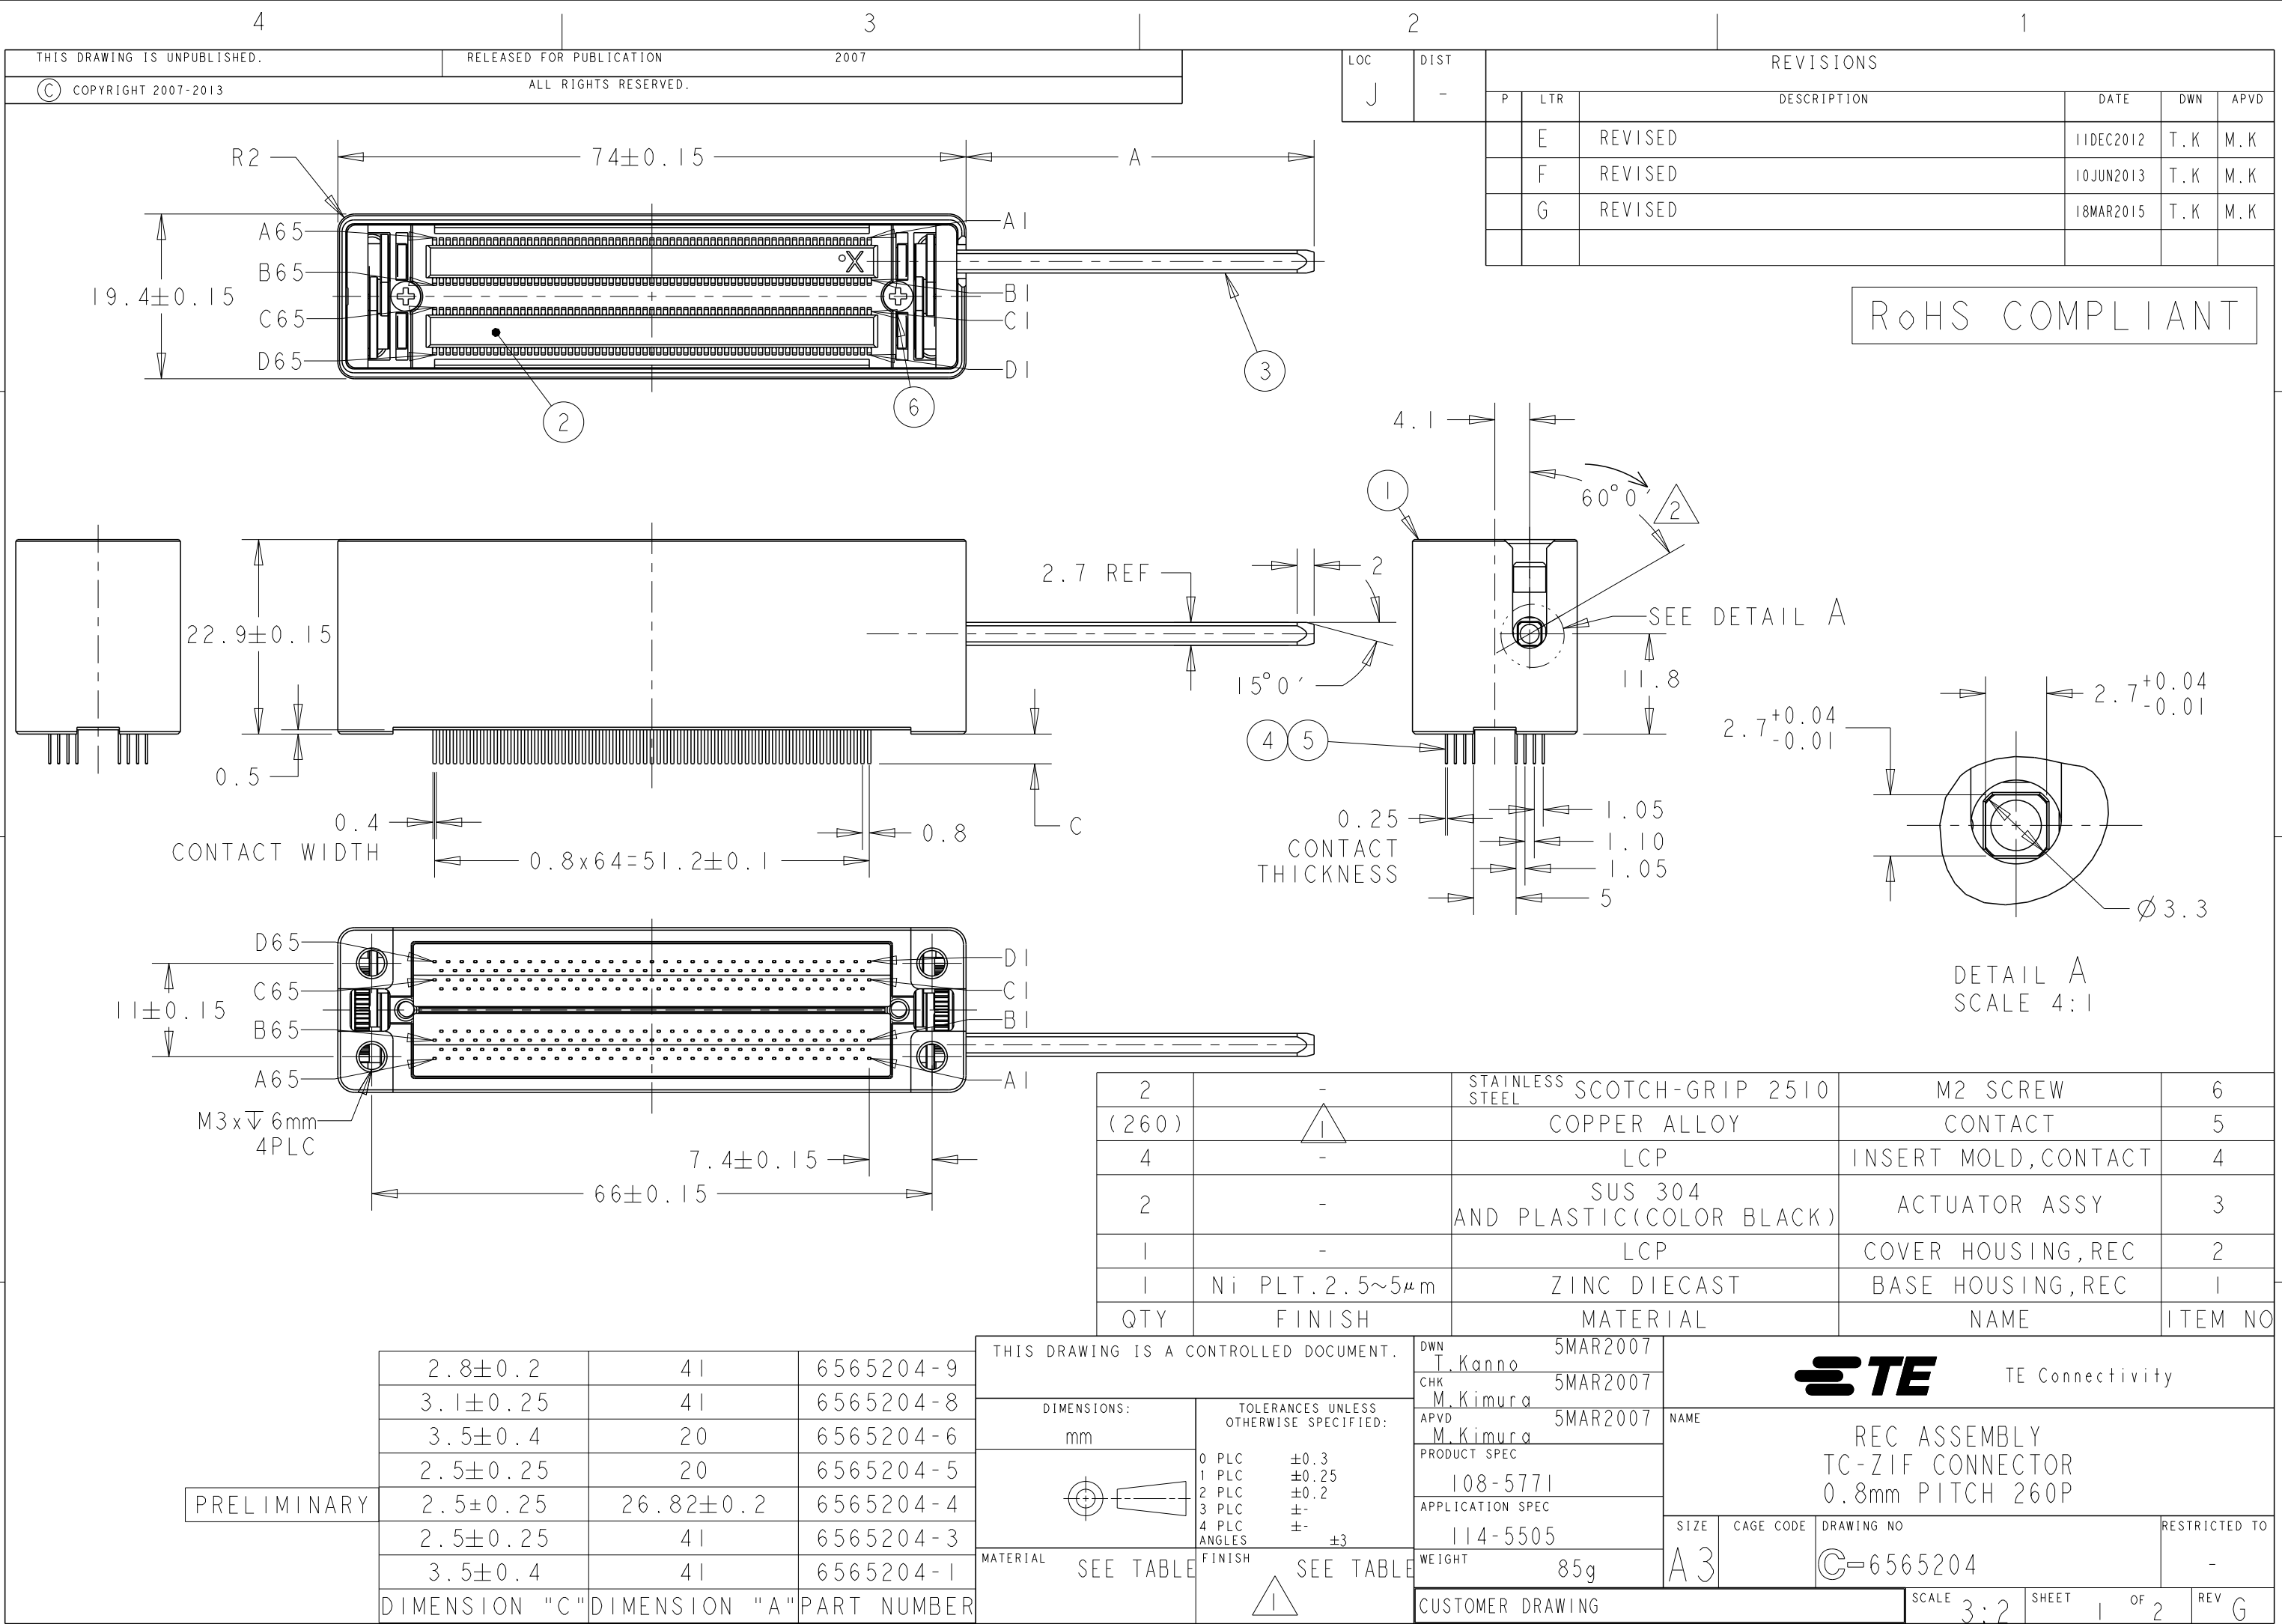

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

2007

© COPYRIGHT 2007-2013

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

J



-

SEE SHEET 1

1 MATING AREA: 1 μ m MIN GOLD PLATING
OVER 2.5 μ m MIN NICKEL
SOLDERING AREA: GOLD FLASH
OVER 2.5 μ m MIN NICKEL
OTHERS: 2.5 μ m MIN NICKEL

2 BY ROTATING 60 $\pm$ 5 DEGREES OF SHAFT CLOCKWISE,
CONNECTOR IS MATED WITH HDR.
CONTACT ENGAGEMENT : 15 $\pm$ 5 DEG.

3. PIN ASSIGNMENTS AS A REFERENCE

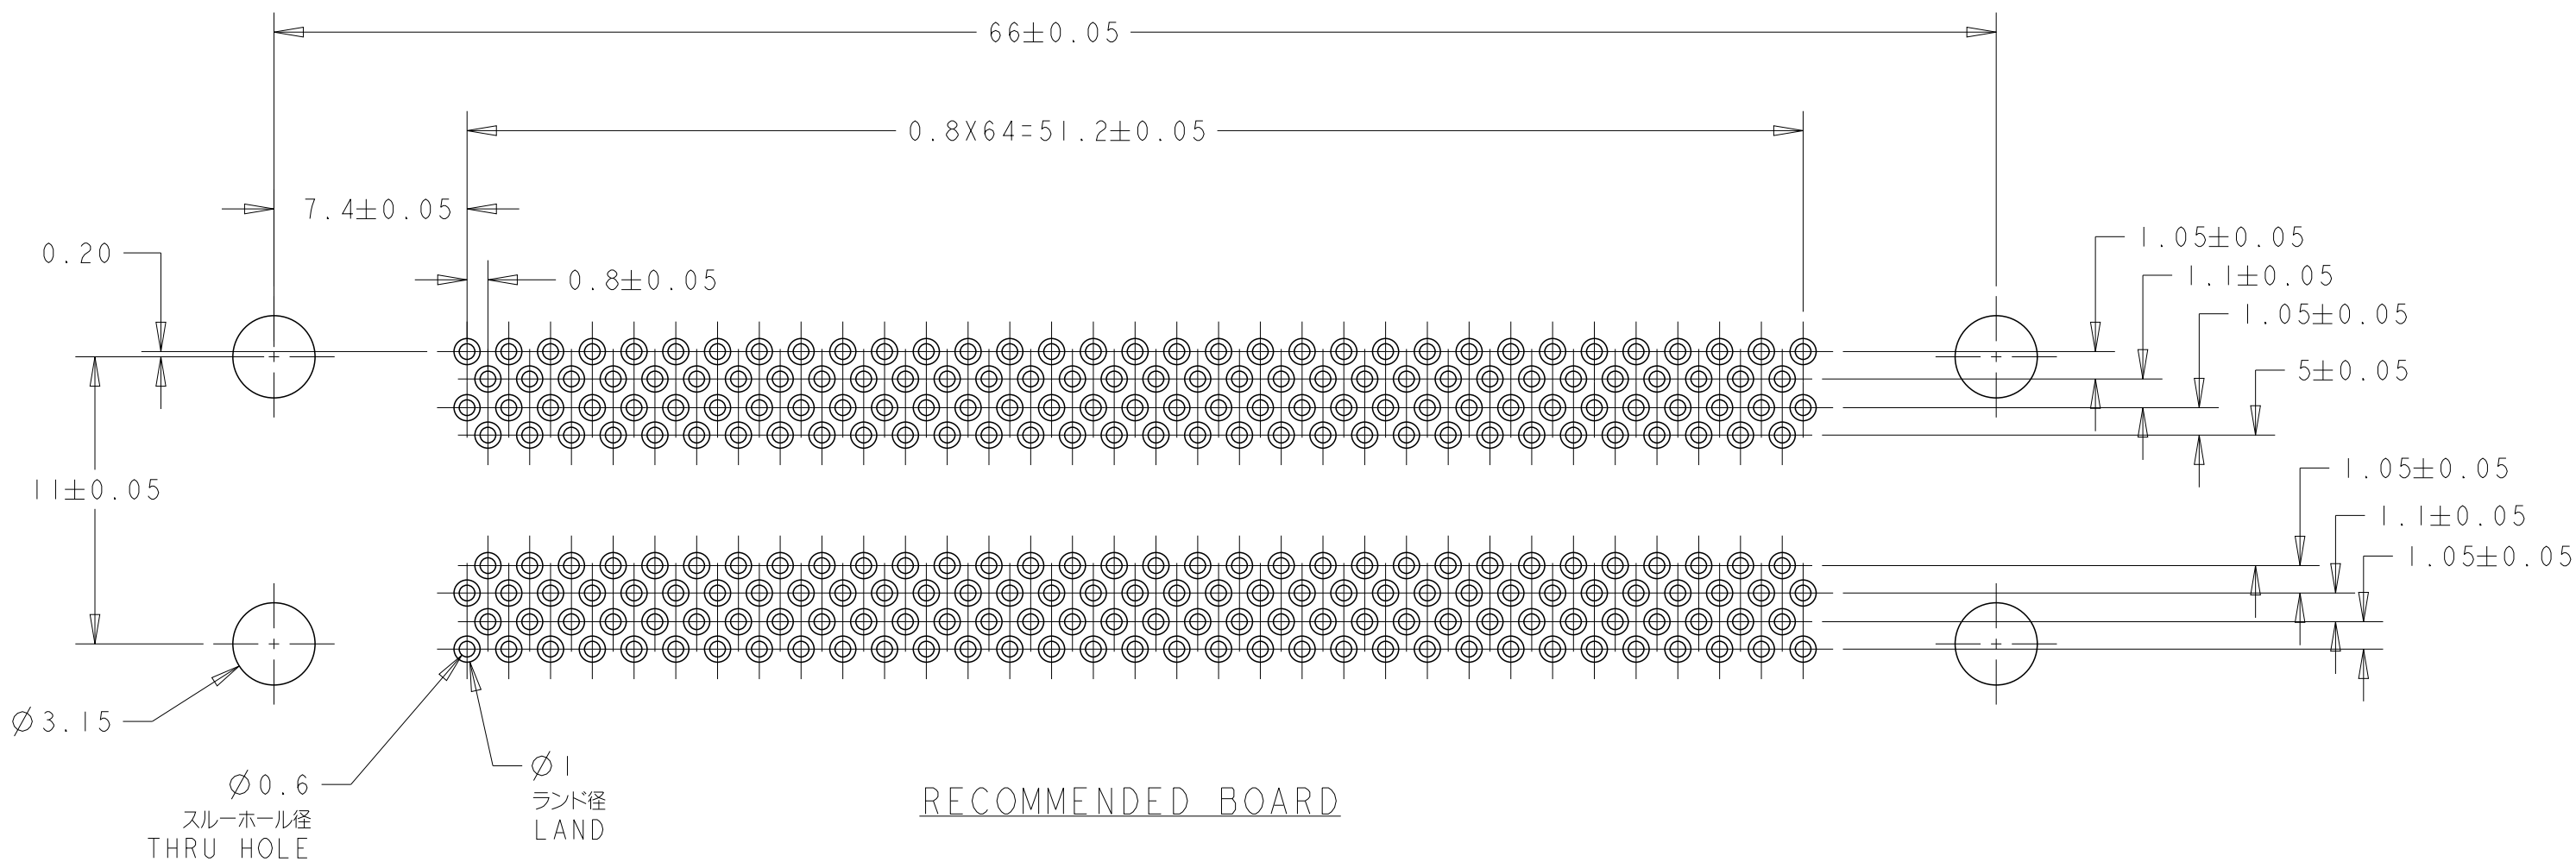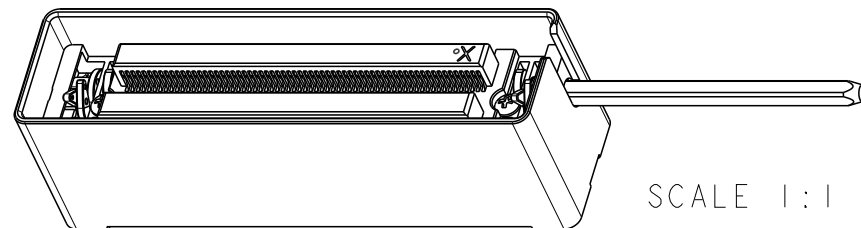

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN T. Kanno 5MAR2007

CHK M. Kimura 5MAR2007

APVD M. Kimura 5MAR2007

PRODUCT SPEC

108-5771

APPLICATION SPEC

114-5505

WEIGHT -

CUSTOMER DRAWING

TE

TE Connectivity

NAME

REC ASSEMBLY
TC-ZIF CONNECTOR
0.8mm PITCH 260P

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

C-6565204

-

SCALE 3:2

SHEET 2 OF 2

REV G