

OLGA-O

~20° + 40° oval beam. Assembly with holder and installation tape.

SPECIFICATION:

Dimensions	Ø 32.0 mm
Height	19.1 mm
Fastening	tape, pin
ROHS compliant	yes 




MATERIALS:

Component	Type	Material	Colour	Finish	Length
OLGA-O	Single lens	PMMA	clear		29.7
OLGA-HLD	Holder	PC	black		32.0
SPUTNIK-TAPE3	Tape	Acrylic foam	black		25.0

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
CA16674_OLGA-O » Box size: 476 x 273 x 292 mm	792	132	66	9.8


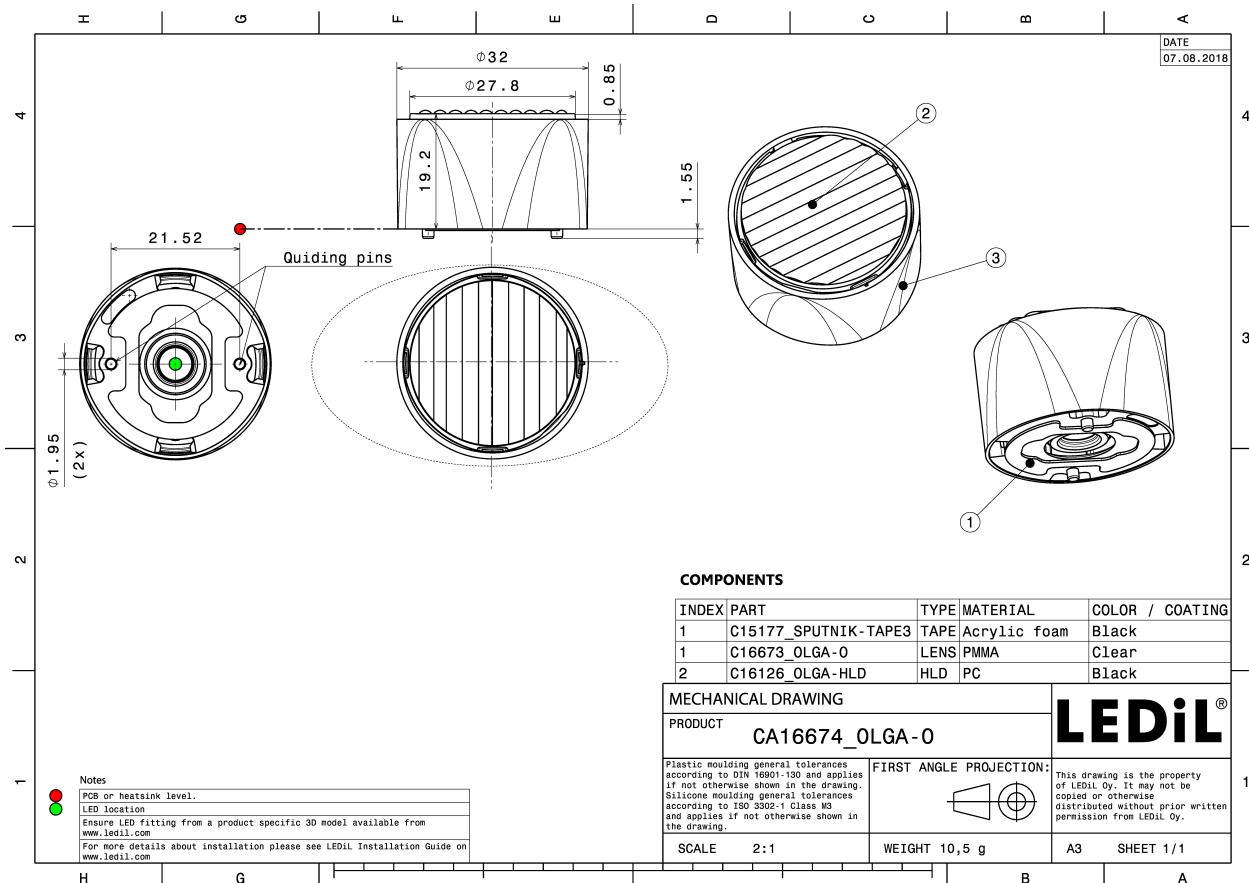


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):




LED XHP50.2
 FWHM / FWTM $42.0 + 21.0^\circ / 72.0 + 47.0^\circ$
 Efficiency 79 %
 Peak intensity 2.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

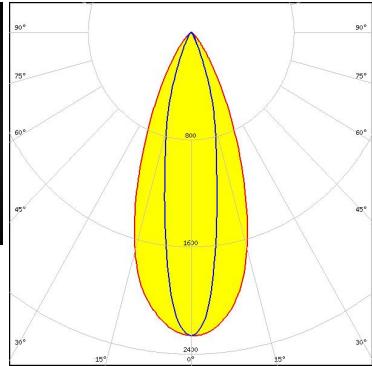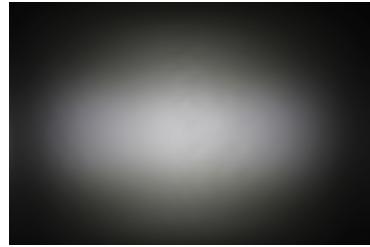

Light distribution files




LED XM-L3
 FWHM / FWTM $43.0 + 15.0^\circ / 65.0 + 34.0^\circ$
 Efficiency 86 %
 Peak intensity 3.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

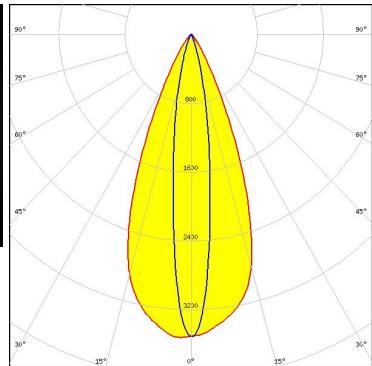

Light distribution files



LED XP-E2
 FWHM / FWTM $44.0 + 10.0^\circ / 60.0 + 23.0^\circ$
 Efficiency 88 %
 Peak intensity 5.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

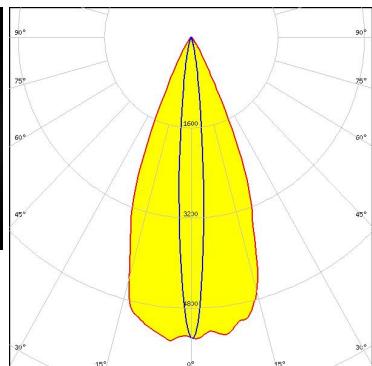


Light distribution files

OPTICAL RESULTS (MEASURED):




LED XQ-E HD
FWHM / FWTM 44.0 + 11.0° / 62.0 + 26.0°
Efficiency 80 %
Peak intensity 4.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

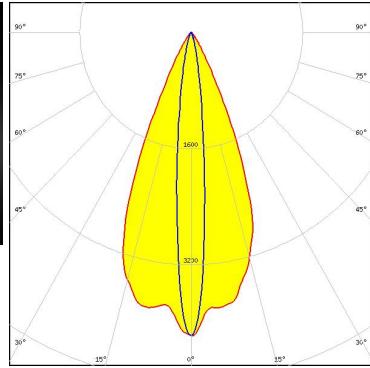

Light distribution files




LED XQ-E HI
FWHM / FWTM 44.0 + 10.0° / 60.0 + 25.0°
Efficiency 85 %
Peak intensity 4.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

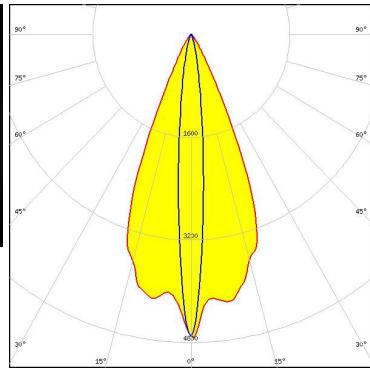

Light distribution files



LED XT-E
FWHM / FWTM 44.0 + 13.0° / 65.0 + 30.0°
Efficiency 84 %
Peak intensity 3.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

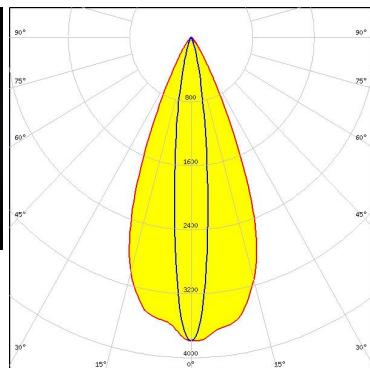


Light distribution files

OPTICAL RESULTS (MEASURED):




LED LUXEON MZ
 FWHM / FWTM 43.0 + 18.0° / 67.0 + 39.0°
 Efficiency 86 %
 Peak intensity 3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

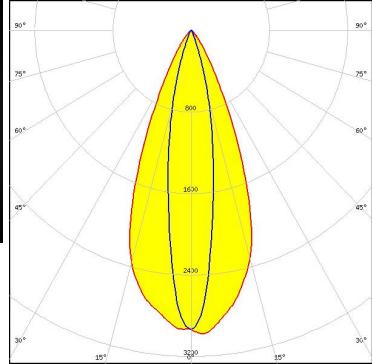

Light distribution files




LED NCSxE17A
 FWHM / FWTM 43.0 + 14.0° / 65.0 + 34.0°
 Efficiency 84 %
 Peak intensity 3.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

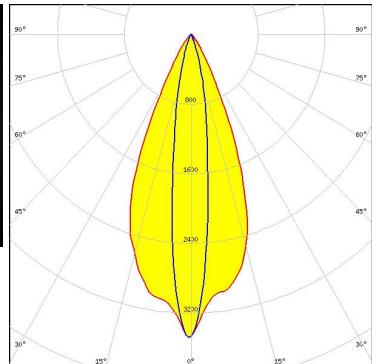

Light distribution files



LED NVSW319B
 FWHM / FWTM 44.0 + 13.0° / 64.0 + 30.0°
 Efficiency 88 %
 Peak intensity 4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

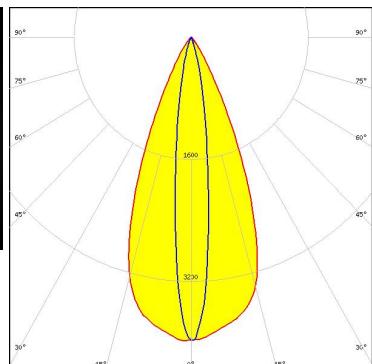


Light distribution files

OPTICAL RESULTS (MEASURED):

OSRAM

Opto Semiconductors

LED Duris S8
FWHM / FWTM $43.0 + 23.0^\circ / 72.0 + 49.0^\circ$
Efficiency 85 %
Peak intensity 2.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:


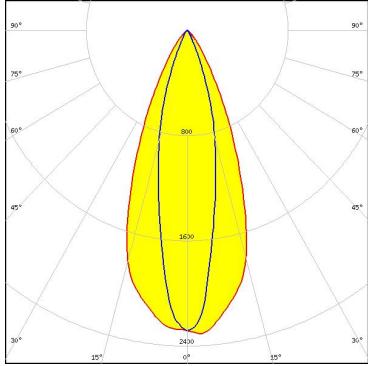


Light distribution files

OSRAM

Opto Semiconductors


LED OSTAR Stage (S2WN)
FWHM / FWTM $44.0 + 14.0^\circ / 64.0 + 30.0^\circ$
Efficiency 87 %
Peak intensity 3.9 cd/lm
LEDs/each optic 1
Light colour/type RGBW
Required components:

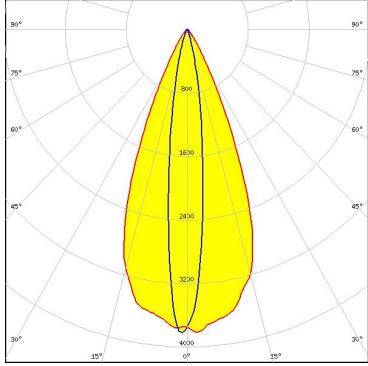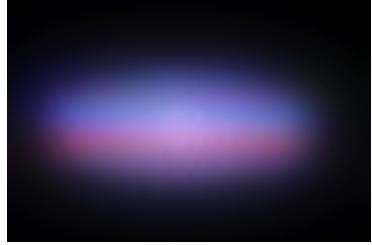

Light distribution files



SAMSUNG

LED LH231B
FWHM / FWTM $44.0 + 16.0^\circ / 67.0 + 37.0^\circ$
Efficiency 86 %
Peak intensity 3.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

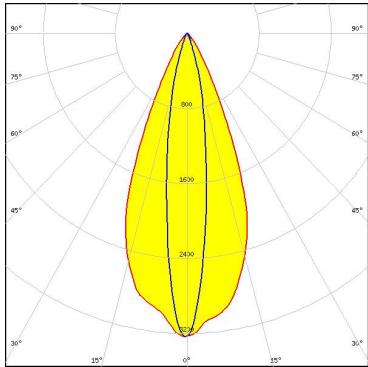

Light distribution files


OPTICAL RESULTS (MEASURED):

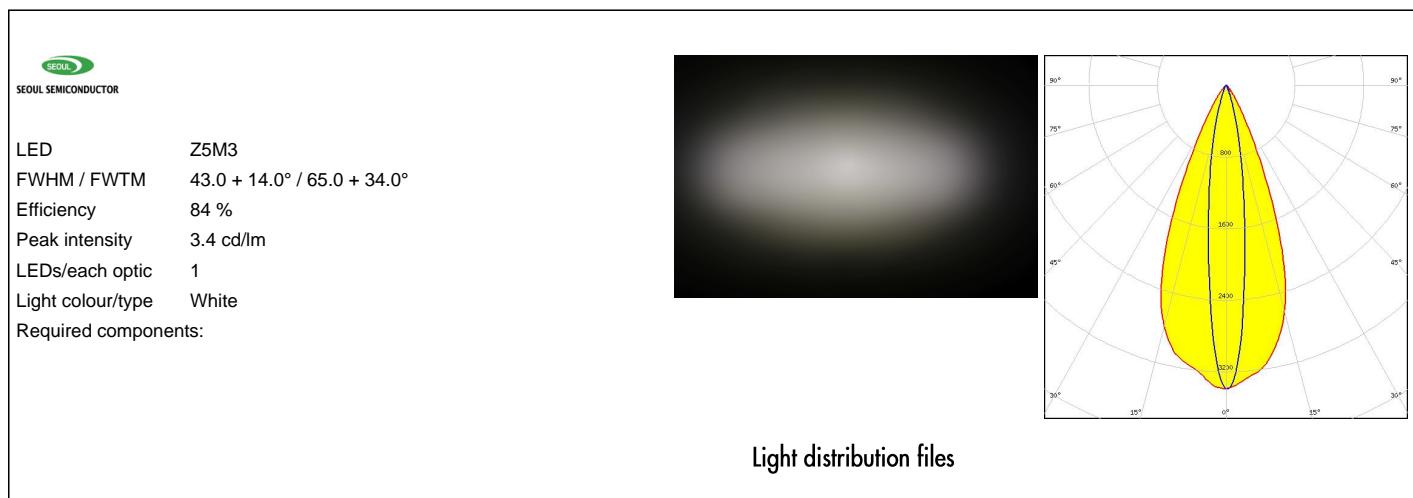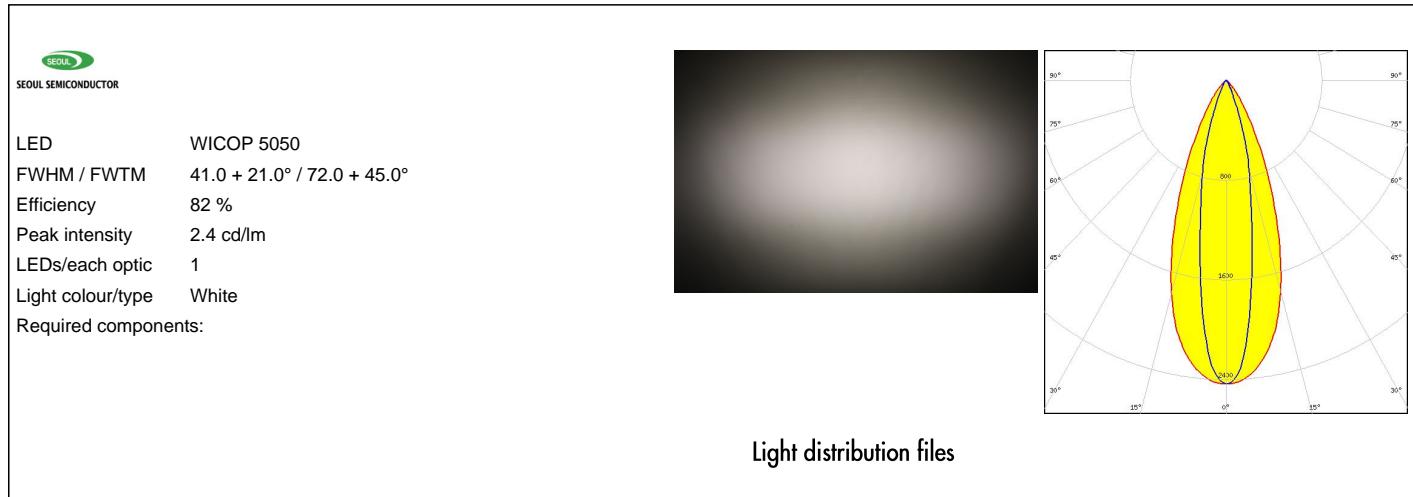

OPTICAL RESULTS (SIMULATED):



LED XHP35 HI
 FWHM / FWTM 11.0 + 42.0°
 Efficiency 90 %
 Peak intensity 5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

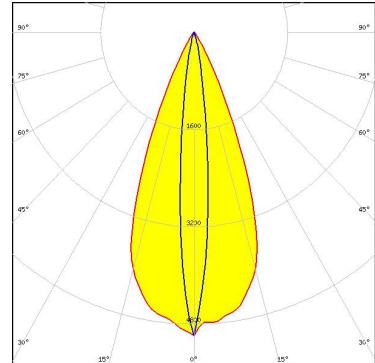

Light distribution files




LED XHP35.2 HI
 FWHM / FWTM 42.0 + 14.0° / 64.0 + 34.0°
 Efficiency 90 %
 Peak intensity 3.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

Light distribution files



LED XHP50.3 HD
 FWHM / FWTM 40.0 + 18.0° / 67.0 + 38.0°
 Efficiency 87 %
 Peak intensity 3.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

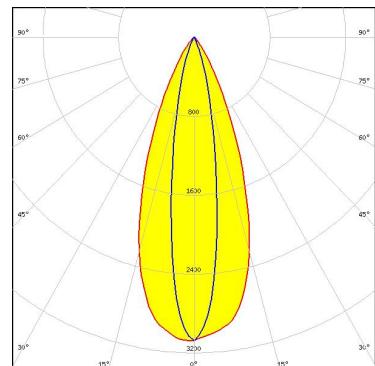


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED	XHP50.3 HI
FWHM / FWTM	42.0 + 14.0° / 65.0 + 34.0°
Efficiency	95 %
Peak intensity	3.6 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

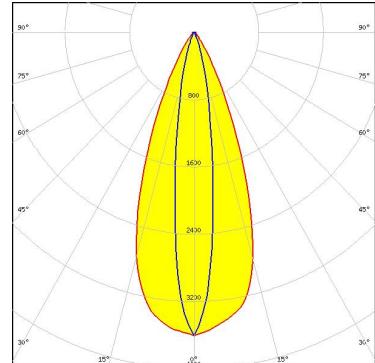

Light distribution files




LED	XP-G2
FWHM / FWTM	9.5 + 42.0°
Efficiency	90 %
Peak intensity	5.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

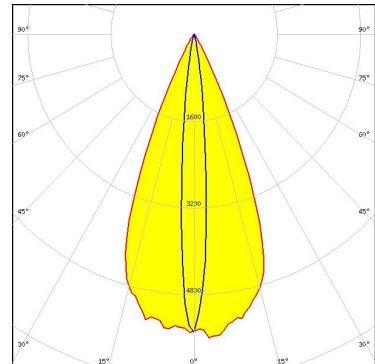

Light distribution files



LED	XP-G2 HE
FWHM / FWTM	42.0 + 12.0° / 60.0 + 26.0°
Efficiency	91 %
Peak intensity	4.7 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

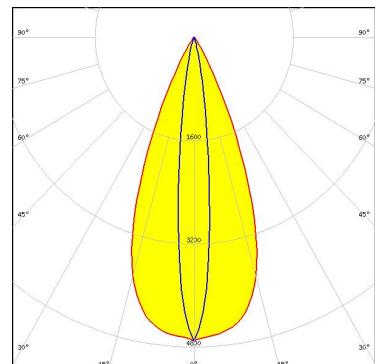


Light distribution files

OPTICAL RESULTS (SIMULATED):



LED	XP-G3
FWHM / FWTM	42.0 + 12.0° / 60.0 + 28.0°
Efficiency	89 %
Peak intensity	4.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

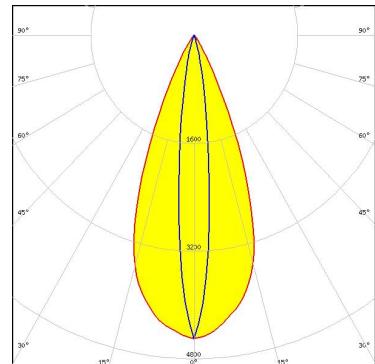

Light distribution files



LED	XP-G4
FWHM / FWTM	42.0 + 10.0° / 58.0 + 22.0°
Efficiency	92 %
Peak intensity	5.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Light distribution files




LED	XP-G4 HI
FWHM / FWTM	44.0 + 10.0° / 58.0 + 22.0°
Efficiency	91 %
Peak intensity	5.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XP-L HI
 FWHM / FWTM $12.0 + 42.0^\circ$
 Efficiency 88 %
 Peak intensity 4.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

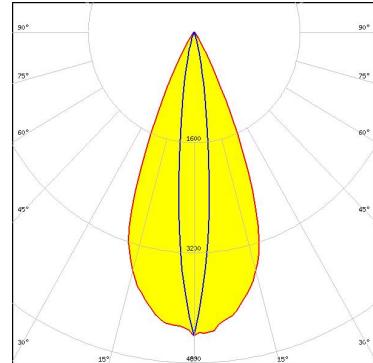

Light distribution files




LED LUXEON 7070
 FWHM / FWTM $42.0 + 20.0^\circ / 76.0 + 60.0^\circ$
 Efficiency 92 %
 Peak intensity 2.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

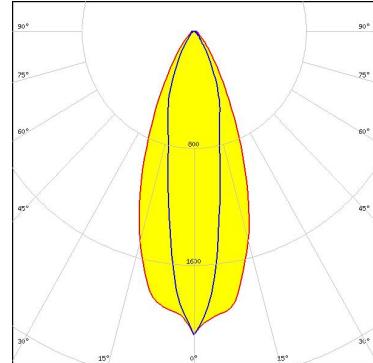

Light distribution files



LED LUXEON M/MX
 FWHM / FWTM $20.0 + 40.0^\circ$
 Efficiency 86 %
 Peak intensity 2.6 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

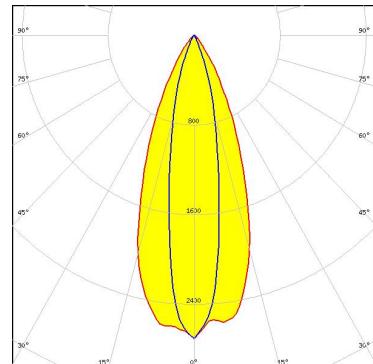


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED SST-70X-WCS
 FWHM / FWTM $41.0 + 16.0^\circ / 65.0 + 34.0^\circ$
 Efficiency 90 %
 Peak intensity 3.6 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

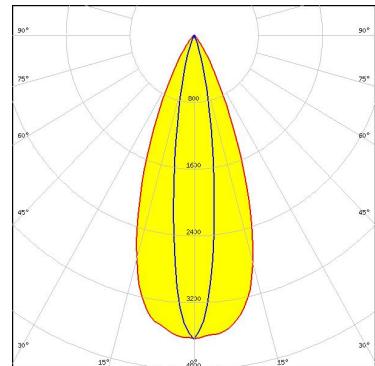

Light distribution files




LED NV4WB35AM
 FWHM / FWTM $42.0 + 16.0^\circ / 64.0 + 36.0^\circ$
 Efficiency 90 %
 Peak intensity 3.6 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

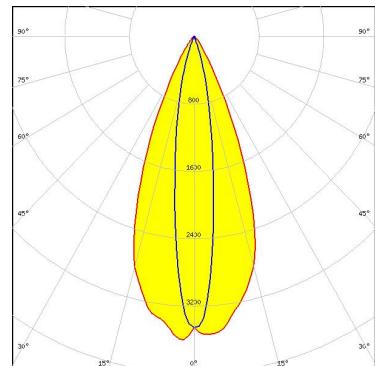

Light distribution files



LED Duris S10
 FWHM / FWTM $42.0 + 20.0^\circ / 72.0 + 54.0^\circ$
 Efficiency 86 %
 Peak intensity 2.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

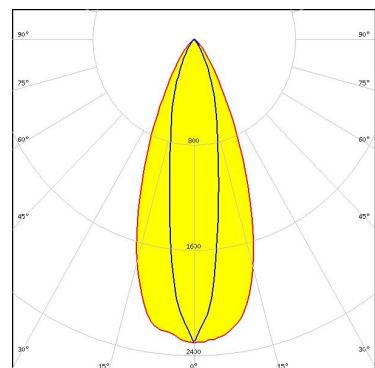

Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM

Opto Semiconductors

LED OSLON Black Flat S (KW HHL532.TK)
 FWHM / FWTM 44.0 + 10.0° / 58.0 + 22.0°
 Efficiency 92 %
 Peak intensity 5.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

[Light distribution files](#)

OSRAM

Opto Semiconductors


LED OSLON Black Flat X (KW HHL631.TK)
 FWHM / FWTM 44.0 + 10.0° / 58.0 + 22.0°
 Efficiency 92 %
 Peak intensity 5.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

[Light distribution files](#)

OSRAM

Opto Semiconductors

LED OSLON Pure 1414
 FWHM / FWTM 41.0 + 16.0° / 65.0 + 33.0°
 Efficiency 91 %
 Peak intensity 3.7 cd/lm
 LEDs/each optic 4
 Light colour/type RGBW
 Required components:

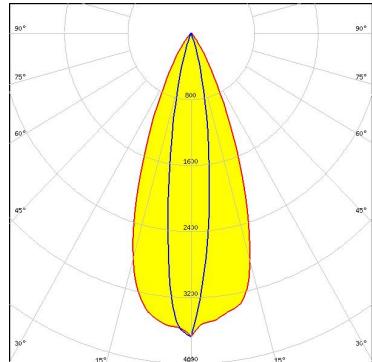


[Light distribution files](#)

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3
FWHM / FWTM $42.0 + 12.0^\circ / 61.0 + 24.0^\circ$
Efficiency 90 %
Peak intensity 4.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

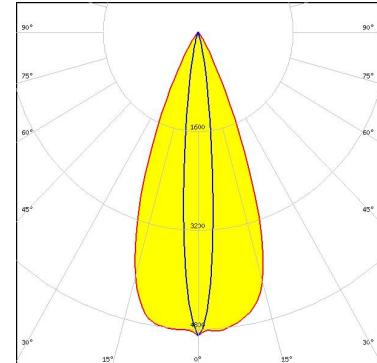

Light distribution files

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy
Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.
228 West Page Street
Suite D
Sycamore IL 60178
USA

**Ledil Optics Technology
(Shenzhen) Co., Ltd.**
405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

**Local sales and technical
support**
www.ledil.com/
where_to_buy

Shipping locations
Poznan, Poland
Hong Kong, China

Distribution Partners
www.ledil.com/
where_to_buy