

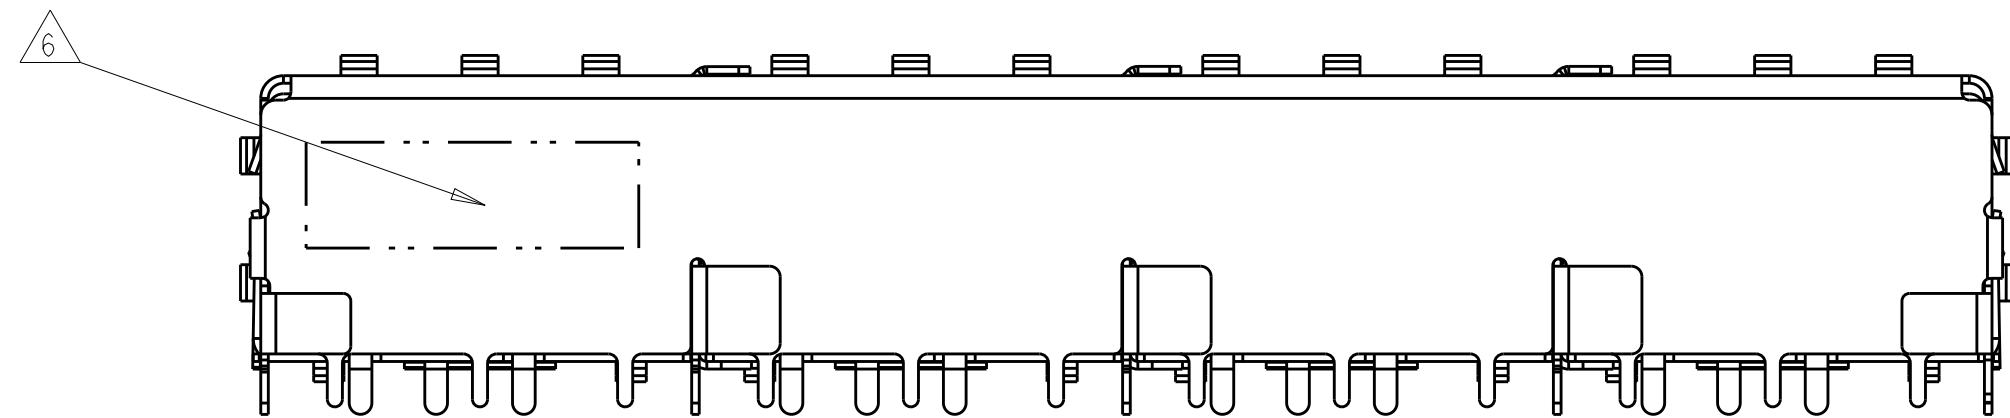
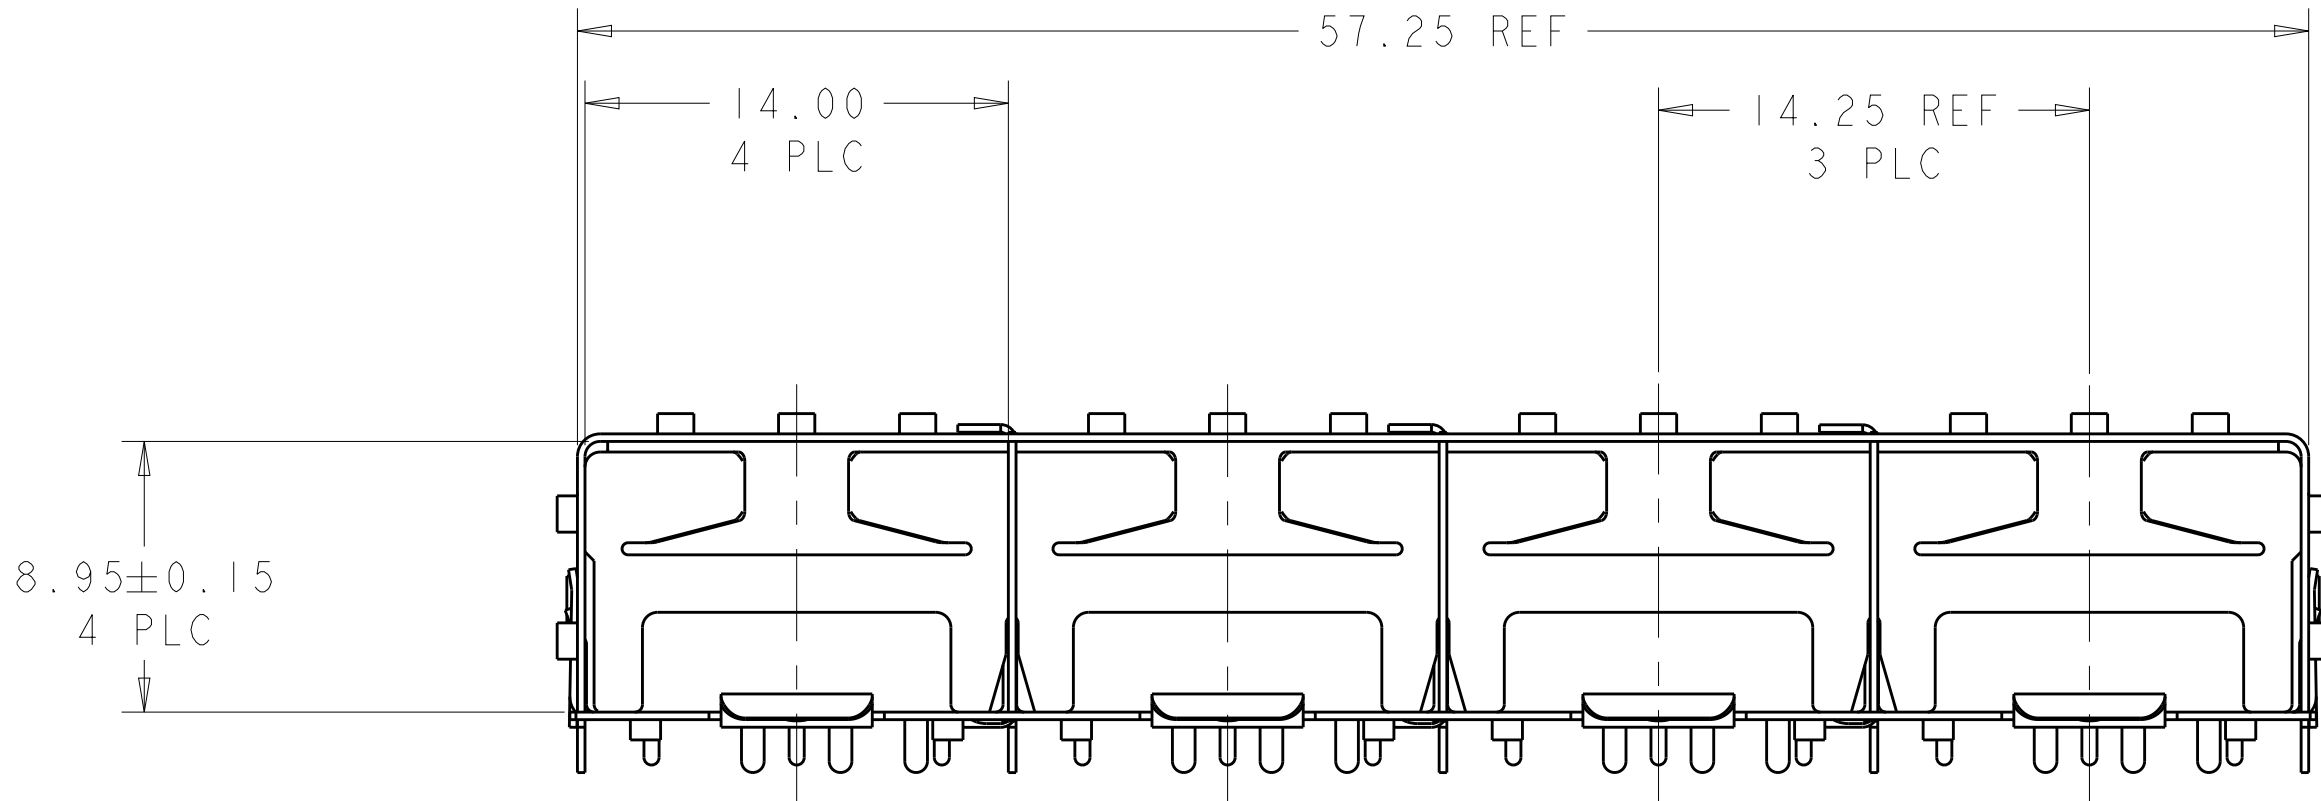
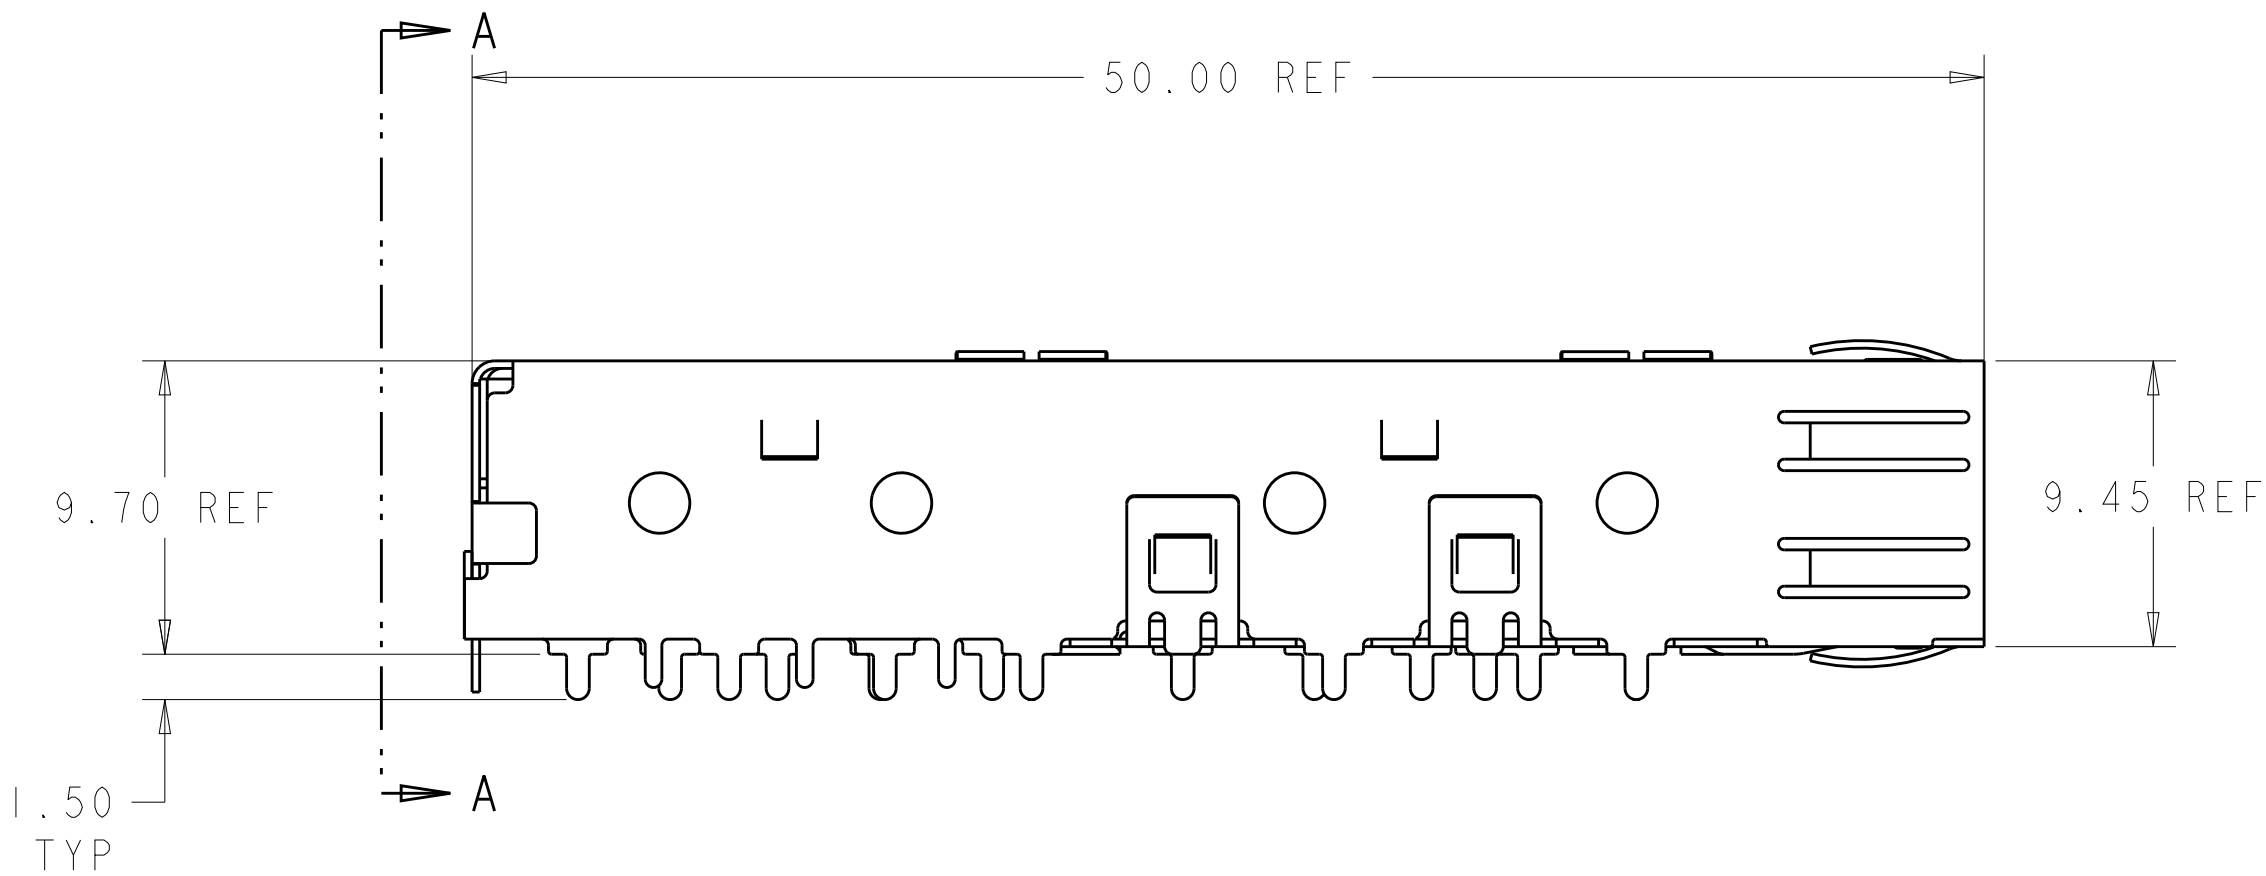
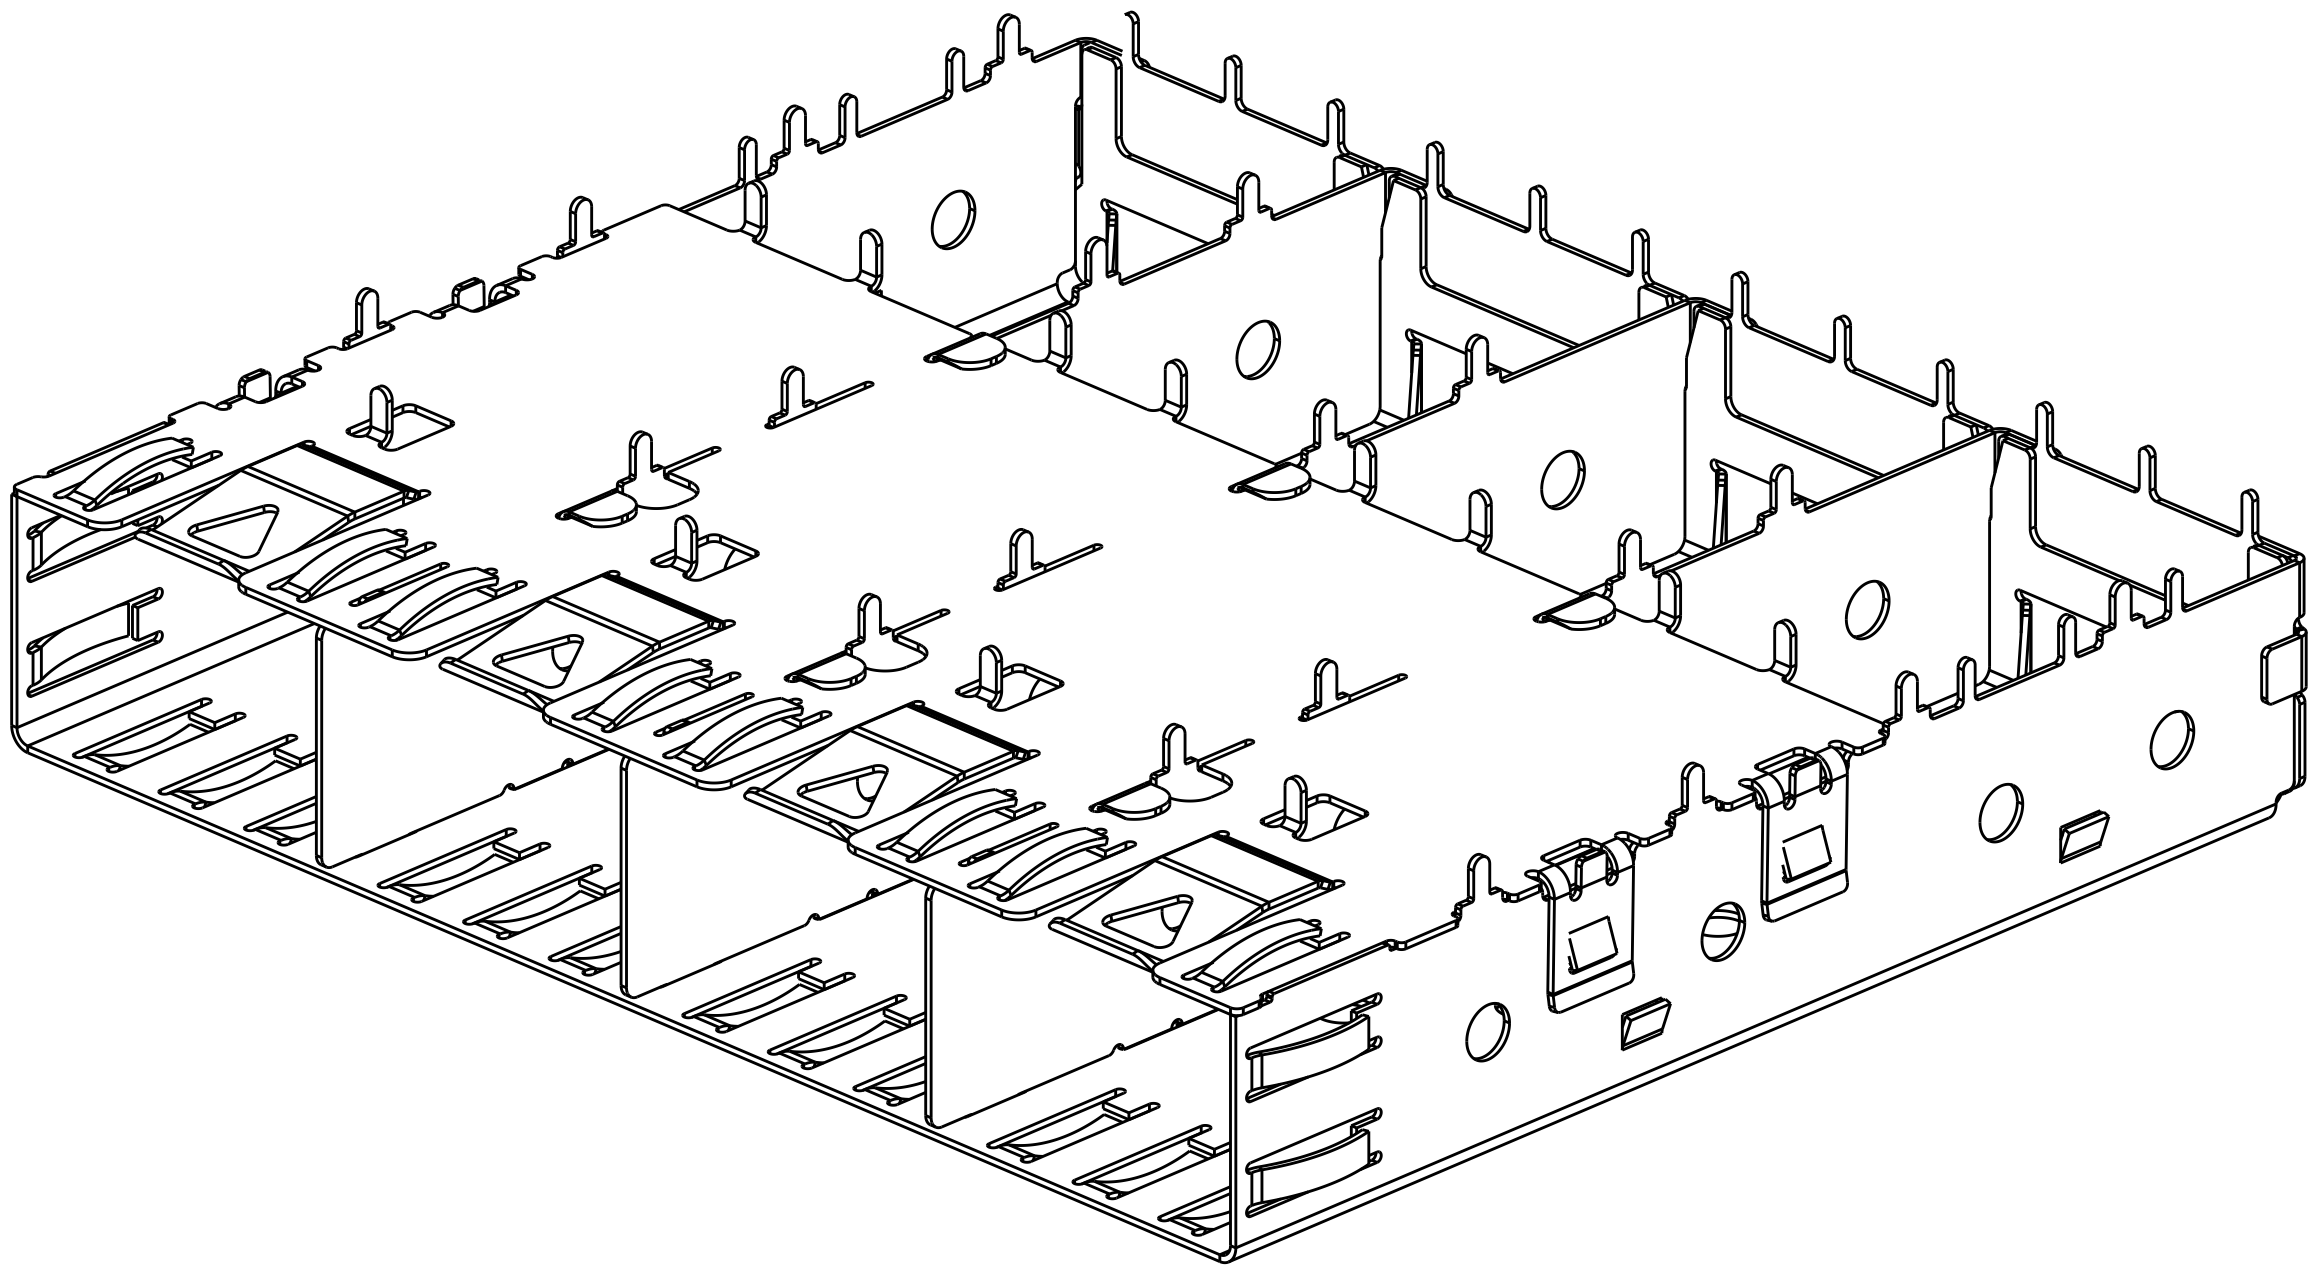


LOC		DIST		REVISONS				
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		E2		REVISED PER ECO-14-010419	11JUL2014	JW	SH	
		F		OBSOLETE PN 1658723-1; ADD PN 1658723-3	05DEC2019	IT	SH	
		G		ADD PN -4 WITH CUSTOMIZED TRAY	15APR2020	IT	SH	
		G1		REMOVE NOT TOOLED PN 1658723-3	07MAY2020	IT	SH	

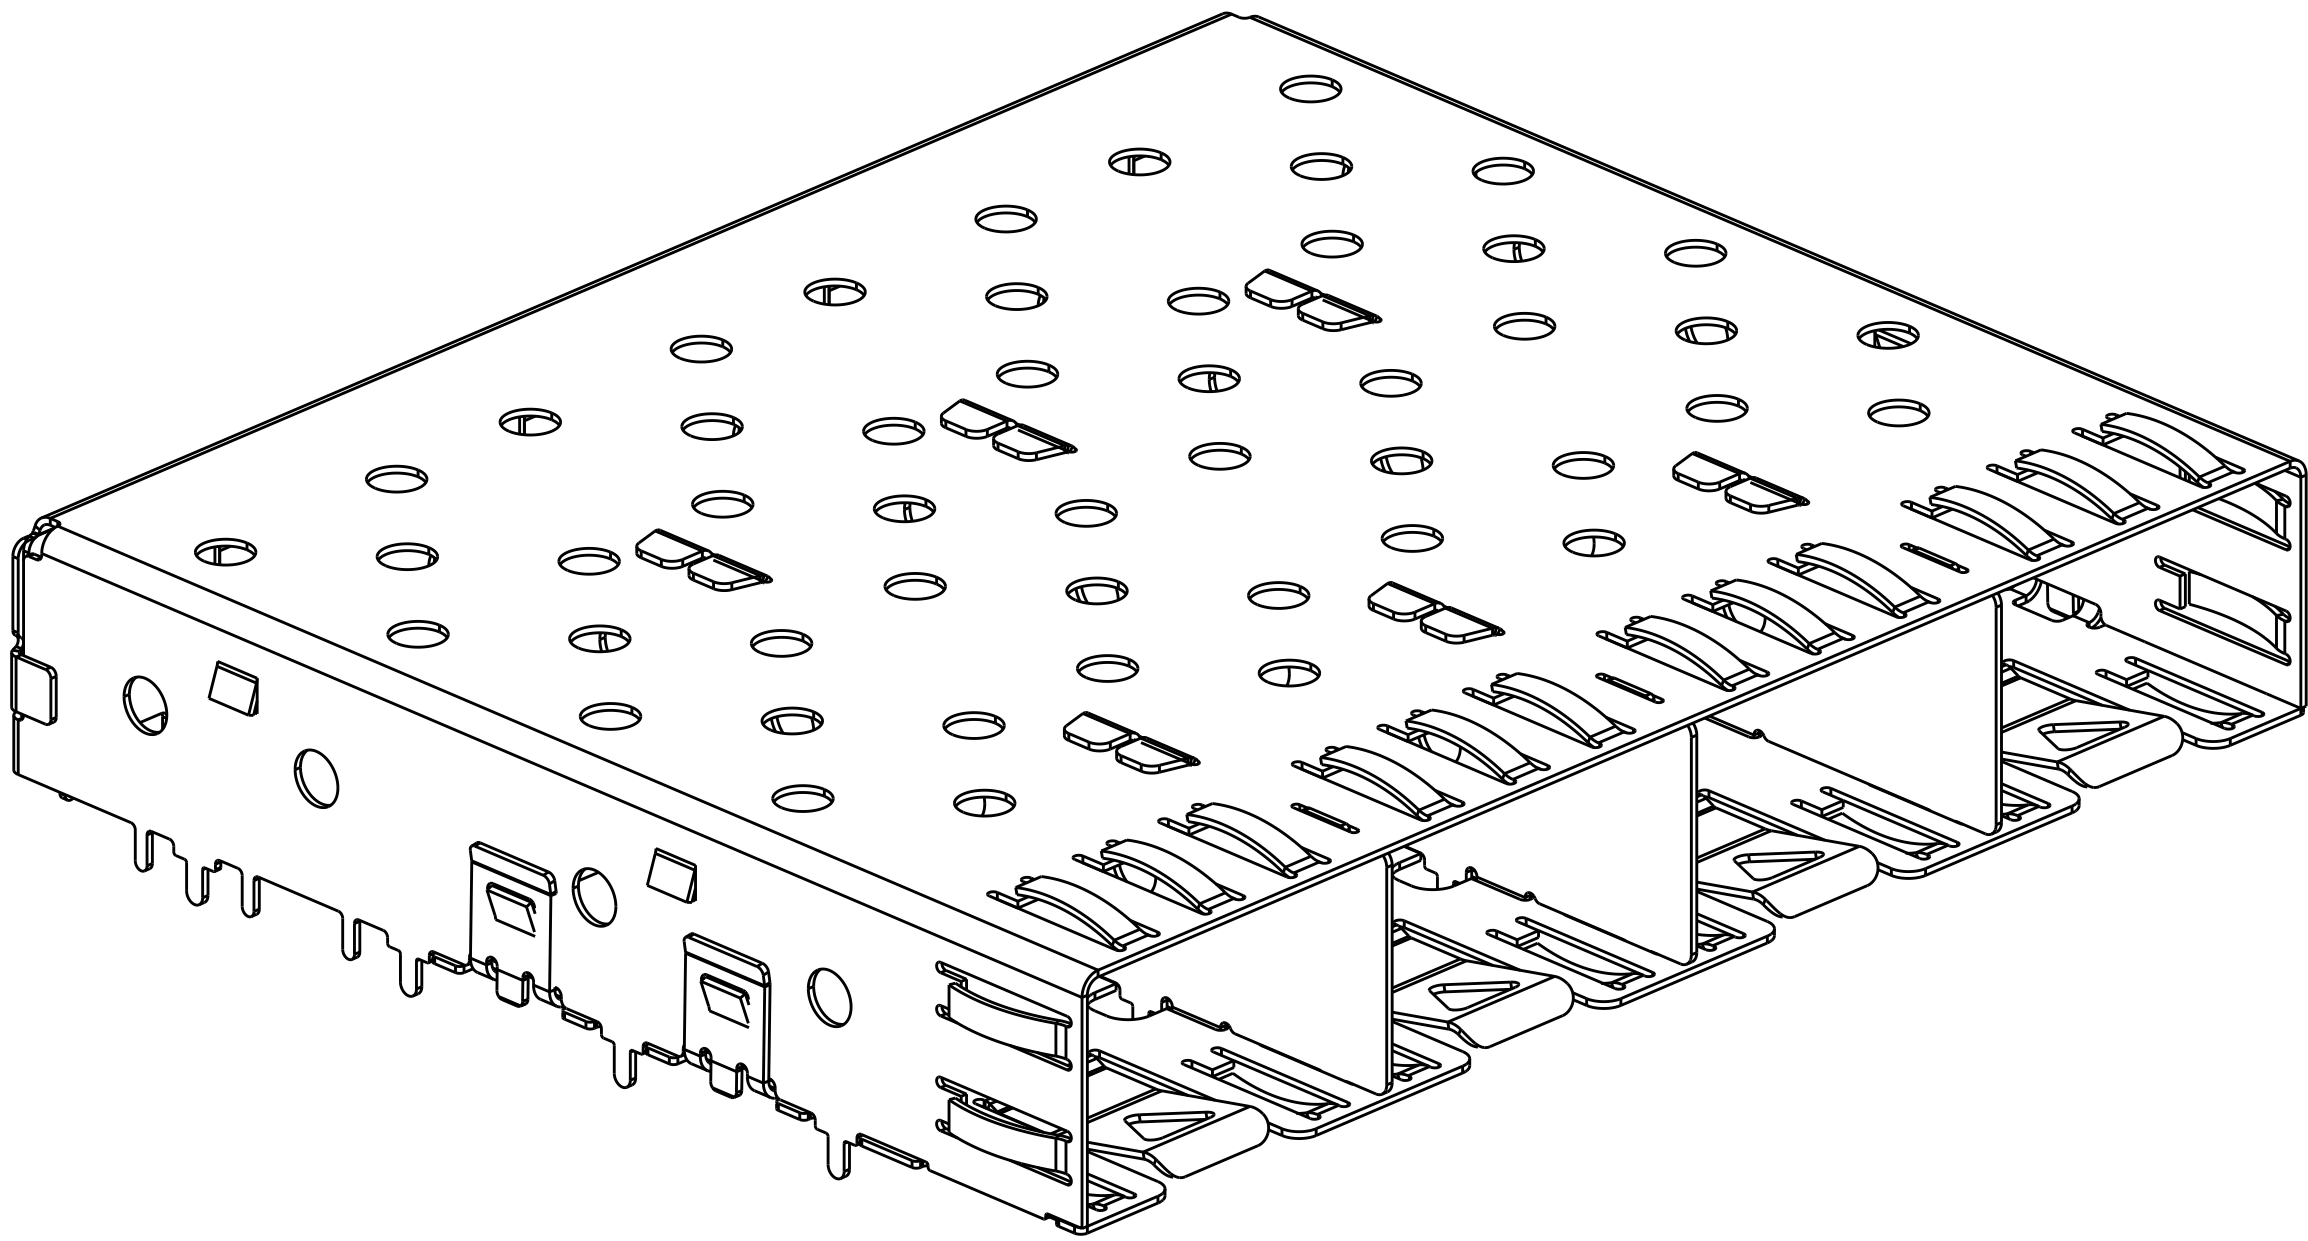

SECTION A-A


- 1 MATERIAL: 0.25MM THICK COPPER ALLOY.
- 2 FINISH: 1.25µm MINIMUM TIN PER ASTM B 545 OVER NICKEL FLASH PER QQ-N-290. NONPLATED EDGES PERMISSIBLE.
- 3 PADS AND VIAS CHASSIS GROUND.
- 4 DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER.
- 5 COMPANY LOGO IN APPROXIMATE AREA SHOWN.
- 6 DATE CODE AND PART NUMBER IN APPROXIMATE AREA SHOWN.
- 7 MATERIAL: 0.25MM THICK NICKEL SILVER ALLOY,
- 8 PACKED WITH CUSTOMIZED TRAY SIZE 340mm X 235mm AND 3X5=15PCS PER TRAY.


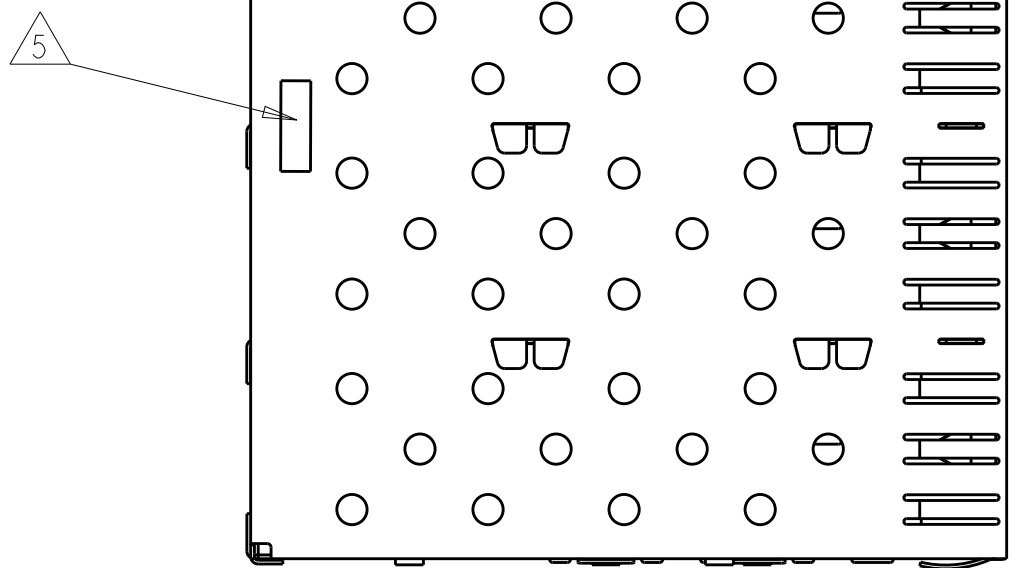


SCALE 2:1

8	NO	1	1658723-4
	NO	7	1658723-2
	2	1	1658723-1
	FINISH	MATERIAL	PART NUMBER

OBSELETE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. SHIRK CHK J. KOPPENHEFFER APVD M. WALMSLEY	13MAY03 06MAY04 06MAY04	TE TE Connectivity CAGE ASSEMBLY, SOLDER LEG, 1X4, SFP
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME		
mm	0 PLC ± 1 PLC ± 2 PLC ±0.10 3 PLC ± 4 PLC ± ANGLES ±	SIZE CAGE CODE DRAWING NO		
	FINISH	RESTRICTED TO		
MATERIAL		WEIGHT	A100779C=1658723	SCALE 4:1 SHEET 1 OF 2 REV G
1	2	CUSTOMER DRAWING		

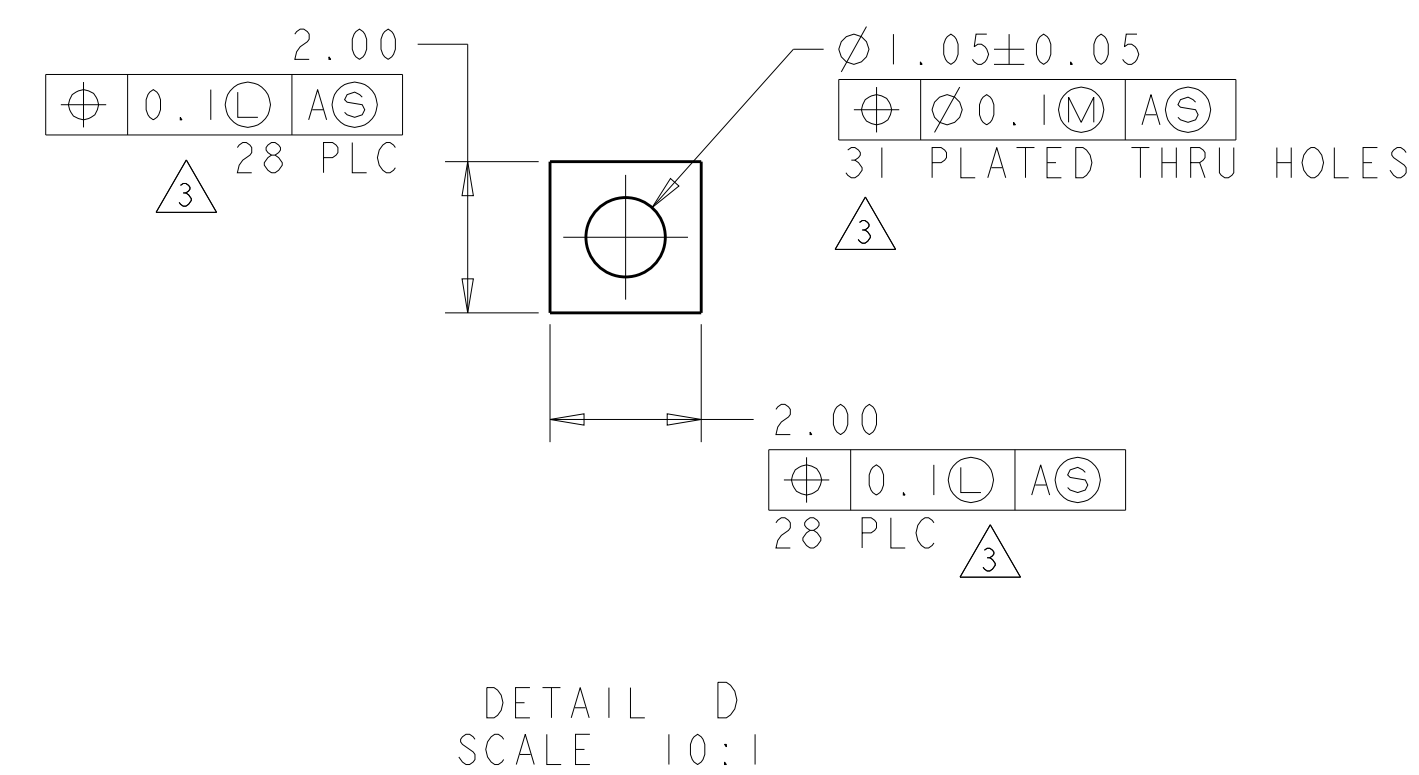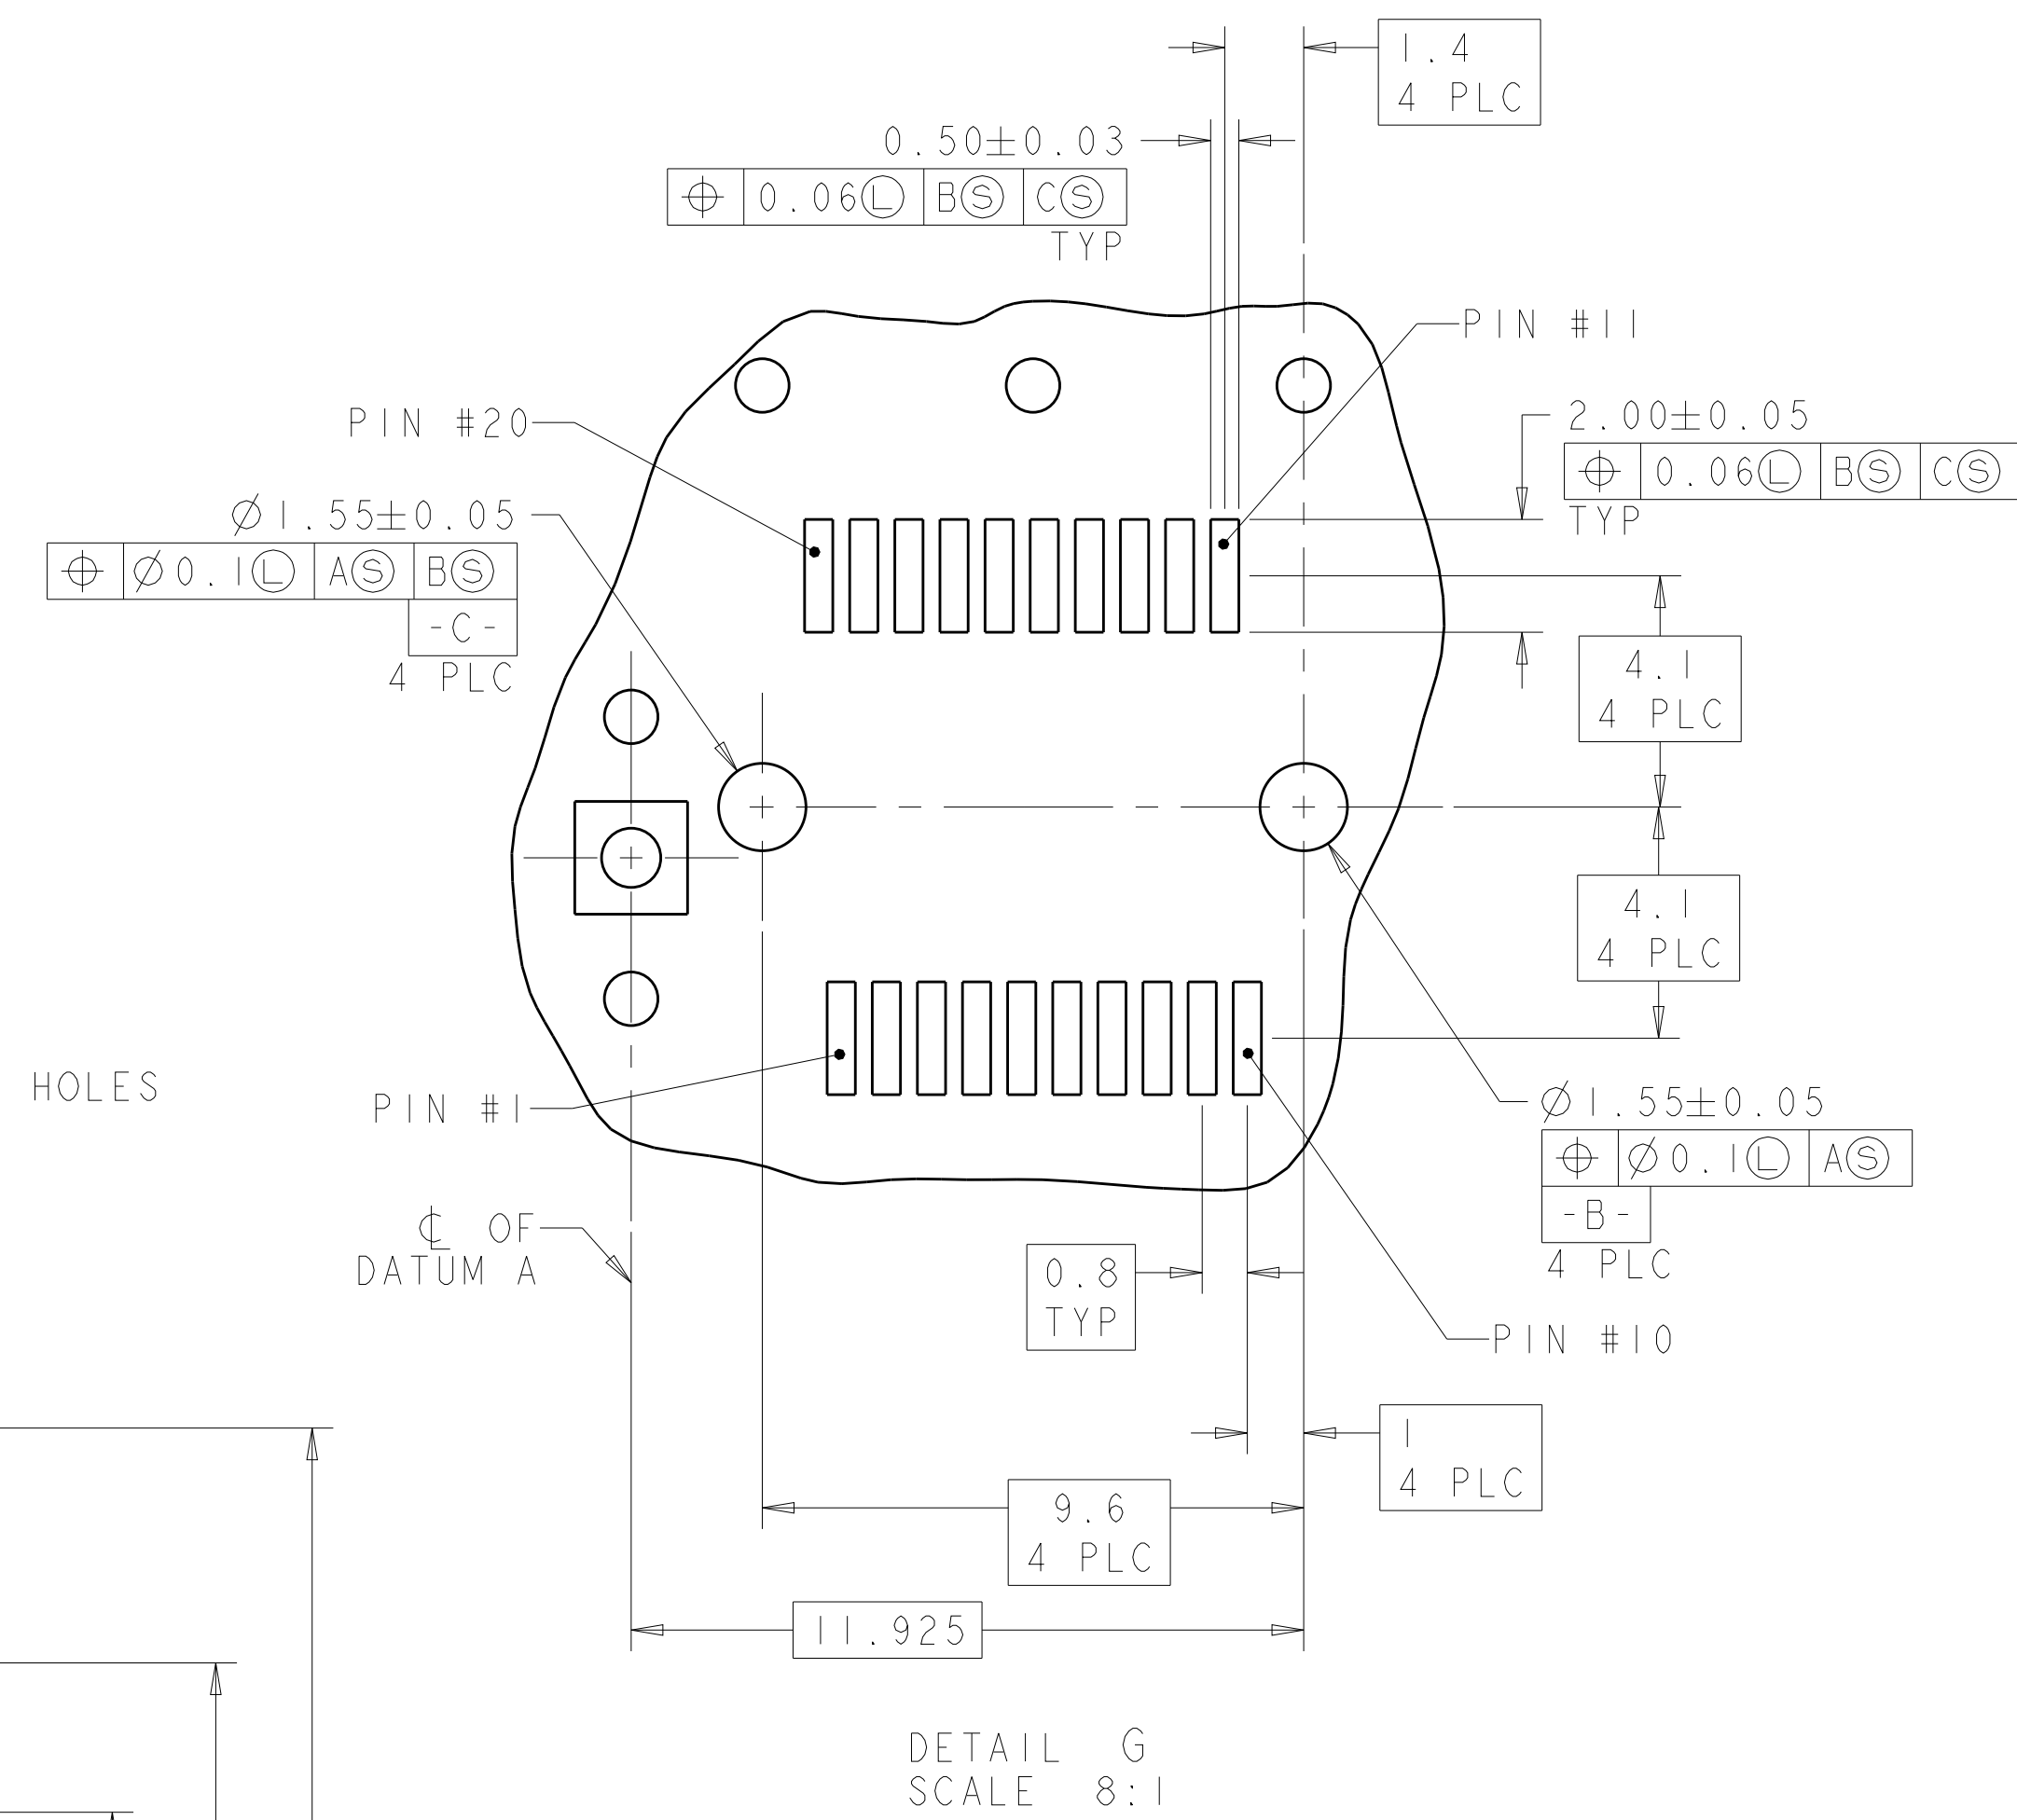

DETAIL D
SCALE 10:1

4805 (3/11)