


Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

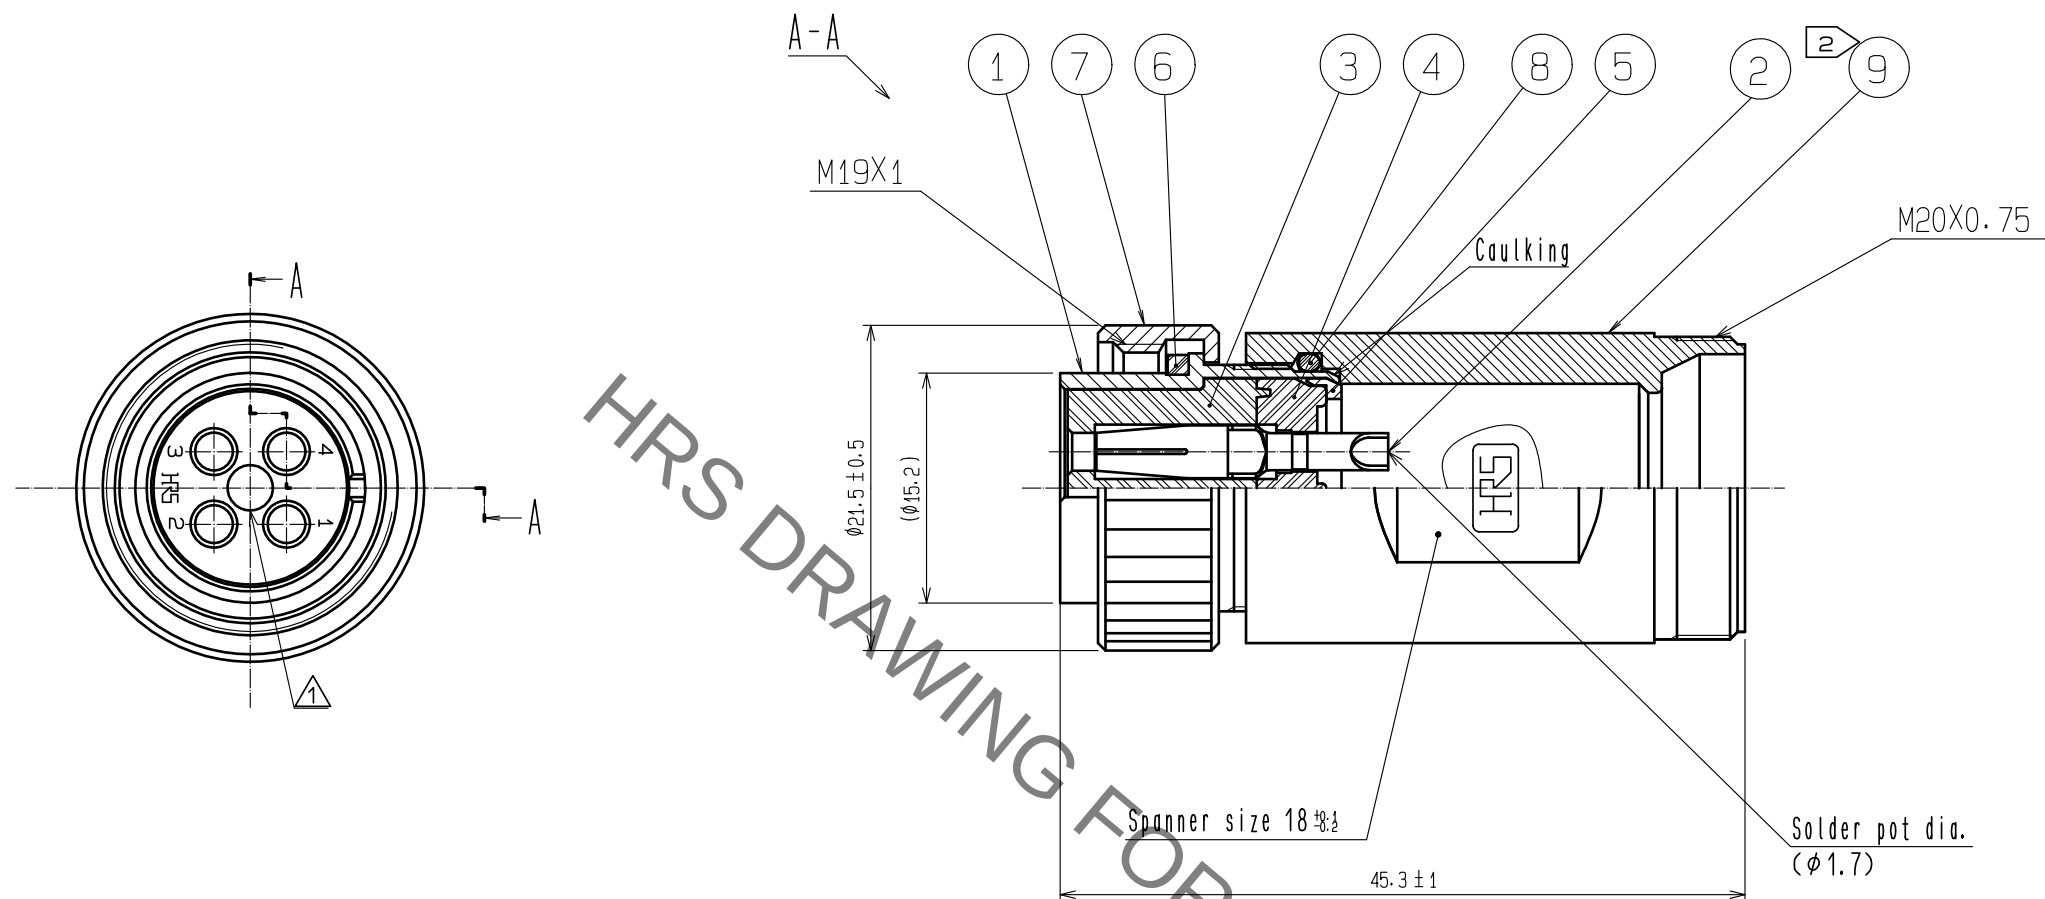

- Notes 1 Rotation examples of ref. No. ⑨ to ref. No. ① is shown.
2 The recommended clamp torque of ref. No. ⑨ : 3 N·m.
LOCTITE 263, HENKEL JAPAN or equivalent is recommended to prevent ref. No. ⑨ from loosening.
3 This product to be used with cableclamp : JR16WCC-*(72)
* designate diameter of applicable cable.
4 The cable pull and twisting strength, waterproof tightness and other characteristics may differ,
depending on the cable structure,
Please confirm before the use.

4	PPS	(BLACK)	UL94V-0	9	ZINC ALLOY	CHROME PLATING
3	PPS	(BLACK)	UL94V-0	8	SILICONE RUBBER	(BLACK)
2	COPPER ALLOY	SURFACE : GOLD PLATING 0.2µm min. UNDER : NICKEL PLATING 3µm min.		7	BRASS	CHROME PLATING
1	ZINC ALLOY	CHROME PLATING		6	SILICONE RUBBER	(RED)
NO.	MATERIAL	FINISH . REMARKS		5	POLYACETAL	(WHITE)
UNITS mm			SCALE 2 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-C-00000841	
DESIGNED KN. IKEHARA			CHECKED HY. KOBAYASHI			DATE 16.03.02
APPROVED : HY. KOBAYASHI			15.11.06			DRAWING NO. EDC-111152-82-00
CHECKED : HY. KOBAYASHI			15.11.06			PART NO. RM15WTPZA-4S(82)
DESIGNED : KN. IKEHARA			15.11.06			CODE NO. CL109-1730-4-82
DRAWN : KN. IKEHARA			15.11.06			

HRS HIROSE
ELECTRIC
CO., LTD.