


Part number	G8AYAR-P19XDD0-R00L
Termination	solder
Size	1,5
Locking principle	break , push
Coding	a_key_amc
Cable Diameter	cable amc A



Illustrations may differ from original product.
Dimensions, unless otherwise specified, in mm.

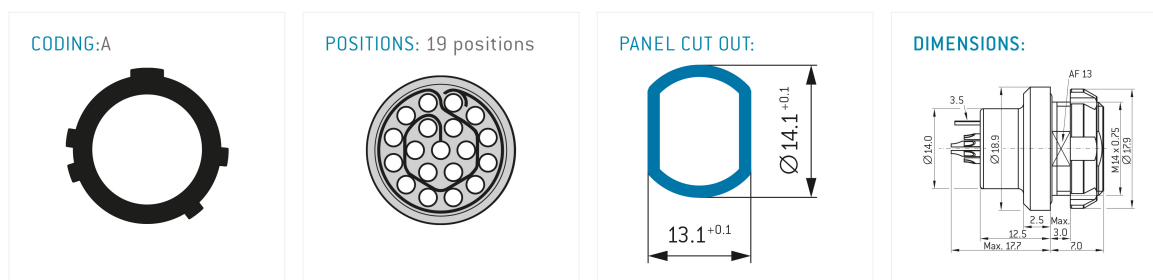

The pin layout corresponds to the view on the termination area

Number of contacts	19
Contact type	spring_contact
Contact diameter	06mm
Insulator material	peek
Wire cross section	26_awg
Termination	solder
Termination diameter	065mm

reverse gender on request

Nominal current single contact	02_a	iec_60512_5_2
Nominal current insert	0,9 A	vde_0298_4
Test voltage	06_kv ac	eia_364_20f

safety text

Degree of protection*	ip6k9k
Operating temperature	51_125_c
Mating cycles	5000

mated

Material and surface treatments

Housing	ruthenium
Contact	cu_alloy_gold

safety_text_2
ul_text
illustrative_text