




REV.	ECN. NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2010/03/24	Dominic	
B	LEN1180130	2011/08/27	baowei	Add Wire Size


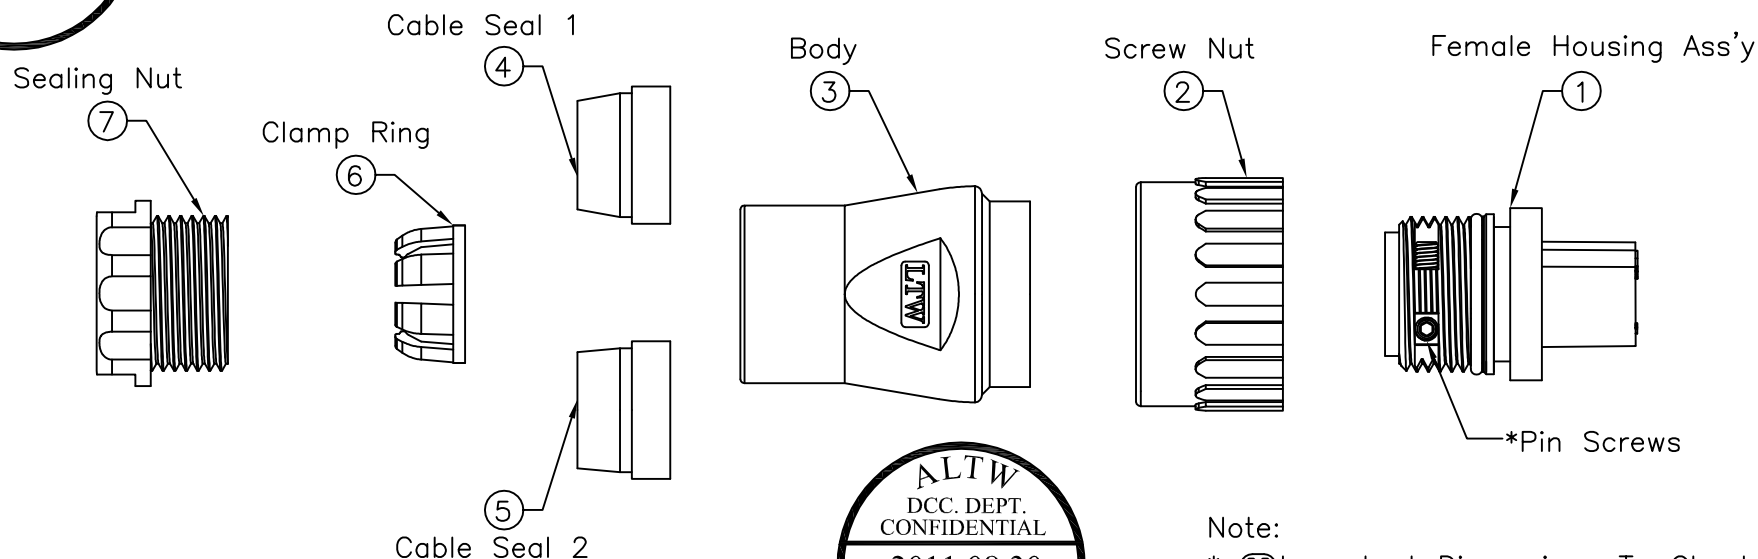


Note:

- * @@Important Dimensions To Check.
- * Waterproof Rate: IP67
- * Female Housing: Nylon+GF, Black
- * Female Pin: Copper Alloy, Gold Plated
- * Pin Screws: 1.5mm(HEX), Stainless Steel
For wire assembly, tightened by tool.
- * O-ring: Silicone, Gray
- * Seal 1: For Cable OD: $\phi 6.0\text{mm} \sim 9.0\text{mm}$
- * Seal 2: For Cable OD: $\phi 9.0\text{mm} \sim 12.5\text{mm}$
- * Flame Class: UL94V-0
- ⑧ * One Set Unassembled in one PE Bag
- * 1.5mm Hex Tool for Screws sold separately
- △ * Wire Size Range: 14AWG~18AWG



Pin Assignments
Front View

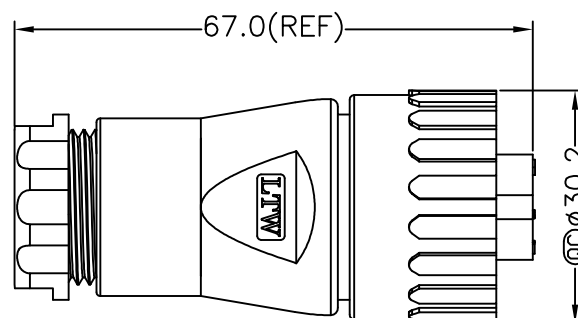

Conn.

UNIT:mm		TOLERANCE		TITLE		Assy Female Power Conn. 16Amp		Screw in Type Pin (Gold Plated)		SCALE		Free		SHEET		1 OF 1	
$\pm 0.5\text{mm}$				REV.		B		SIZE		A4		QC		:Inspection Item			

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	PWG-04BFFB-SL7001	DRAWN BY	baowei	DATE	2011/08/27
DWG NO	PWG-04BFFB-SL7001	CHECKED BY	Micky	DATE	2011/08/27
CUSTOMER	ALTW	APPROVED BY	Victor	DATE	2011/08/27

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.