
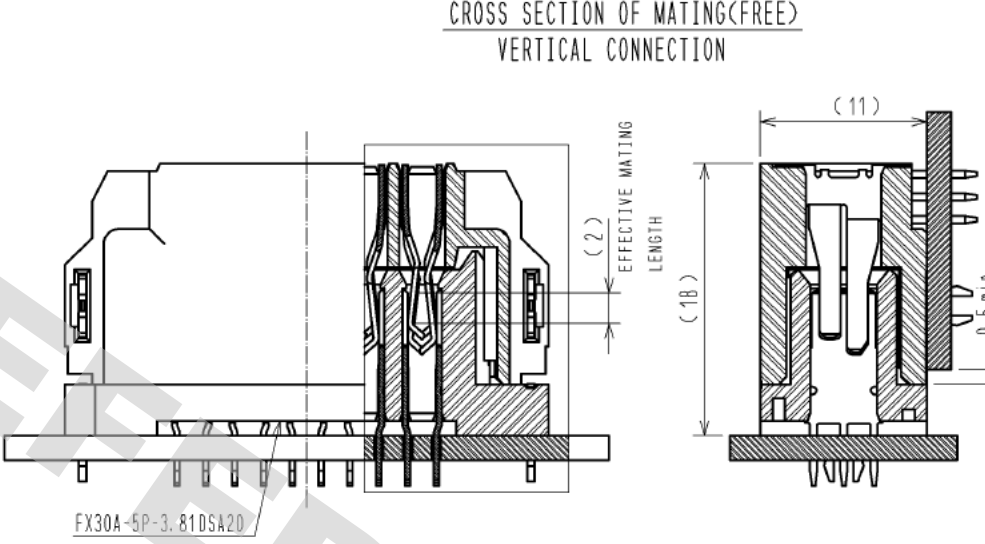
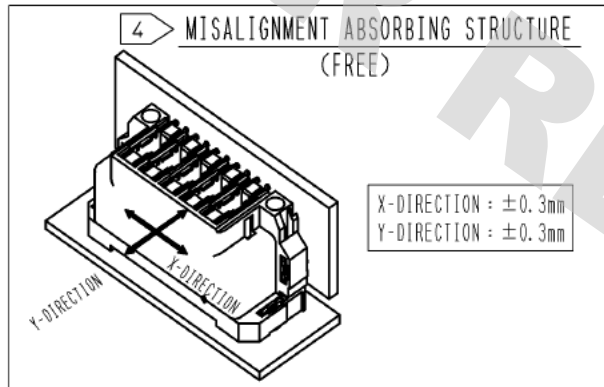
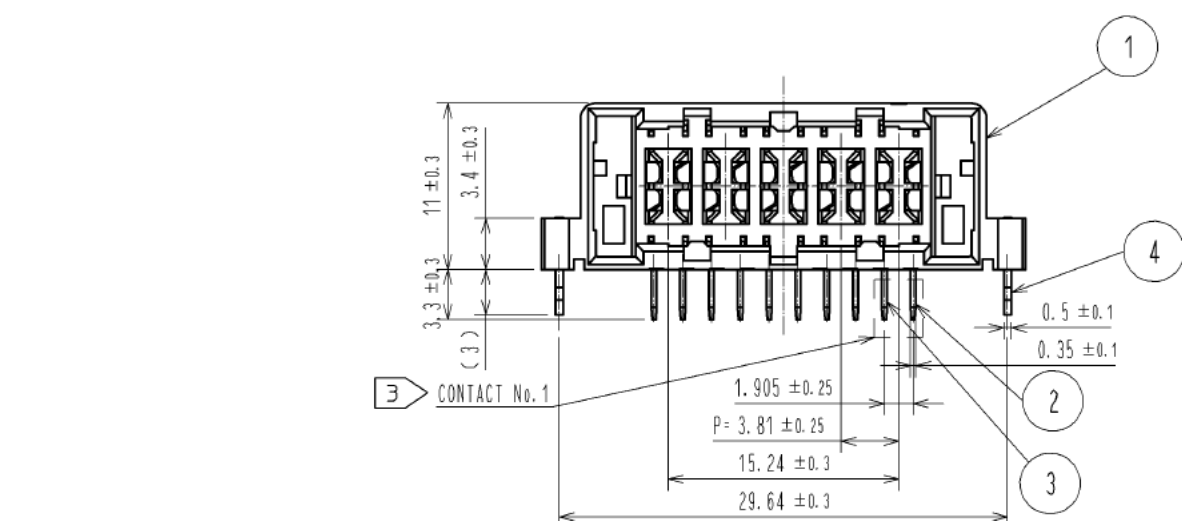


HRS

DRAWING FOR REFERENCE

FOR REFERENCE


REVISIONS

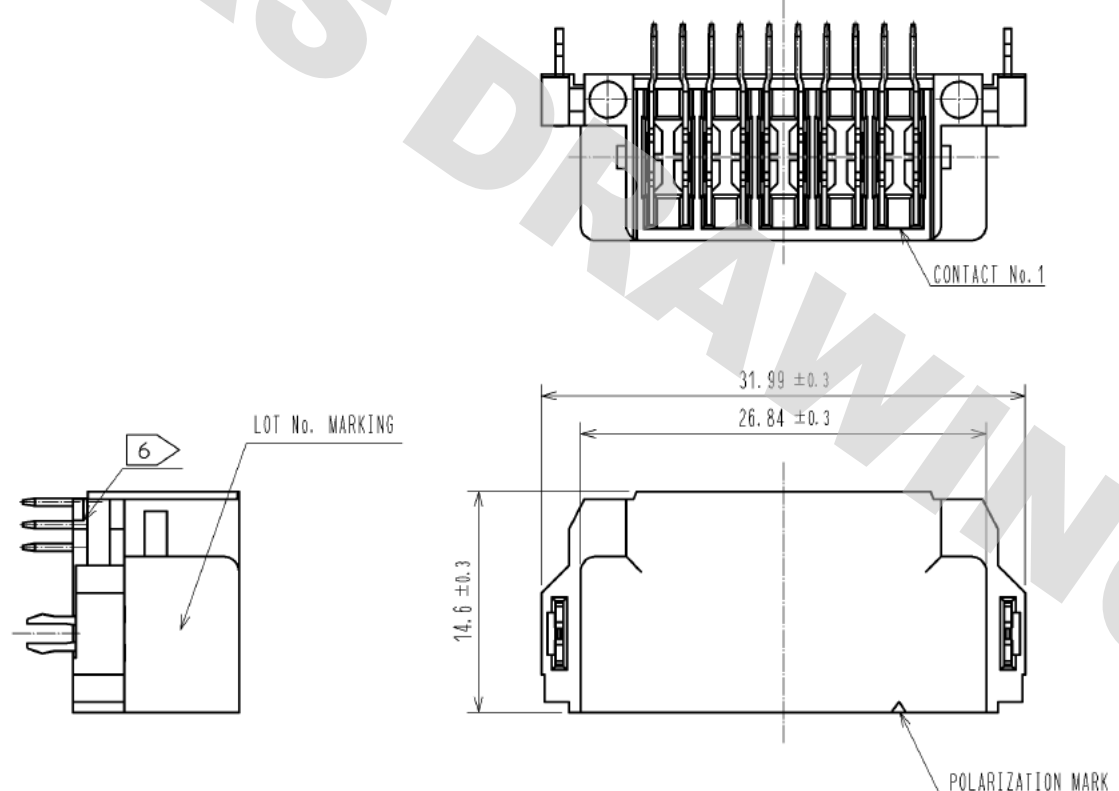

NOTE 1 THIS PRODUCT IS PACKAGED IN TRAY. (42pcs/TRAY)
2 BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS WHICH DOESN'T AFFECT QUALITY LEVEL.
ALSO, BLACK SPOT COULD BE OBSERVED ON THE SURFACE OF HOUSING.
3 EACH CONTACT NO. IS APPLIED TO ADJACENT 6 LEADS AS A LINE.
4 MISALIGNMENT ABSORBING RANGE: ± 0.3mm max.
5 THE DIMENSION IN PARENTHESES ARE FOR REFERENCES.
6 POSSIBLE SHORT SHOT AT THE INDICATED AREA DOES NOT AFFECT THE PRODUCT QUALITY.

2	COPPER ALLOY	CONTACT AREA:GOLD-PLATING 0.1 μm	5	POLYSTYRENE	
		LEAD AREA:TIN-PLATING 1.0 μm	4	PHOSPHOR BRONZE	TIN-PLATING 3.0 μm
		UNDER PLATING:NICKEL 1.0 μm			UNDER PLATING:NICKEL 1.0 μm
1	POLYAMIDE	BLACK UL94V-0	3	COPPER ALLOY	CONTACT AREA:GOLD-PLATING 0.1 μm
					LEAD AREA:TIN-PLATING 1.0 μm
					UNDER PLATING:NICKEL 1.0 μm
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT △	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA 12.06.15	DRAWING NO. EDC3-341819-00		
		CHECKED : KI. HIROKAWA 12.06.15	PART NO. FX30A-5S-3.81DS		
		DESIGNED : DK. AIMOTO 12.06.14	CODE NO. CL570-2503-4-00		
		DRAWN : DK. AIMOTO 12.06.14	1/2		

DRAWING FOR REFERENCE: This is subject to change without notice
05/31/2013

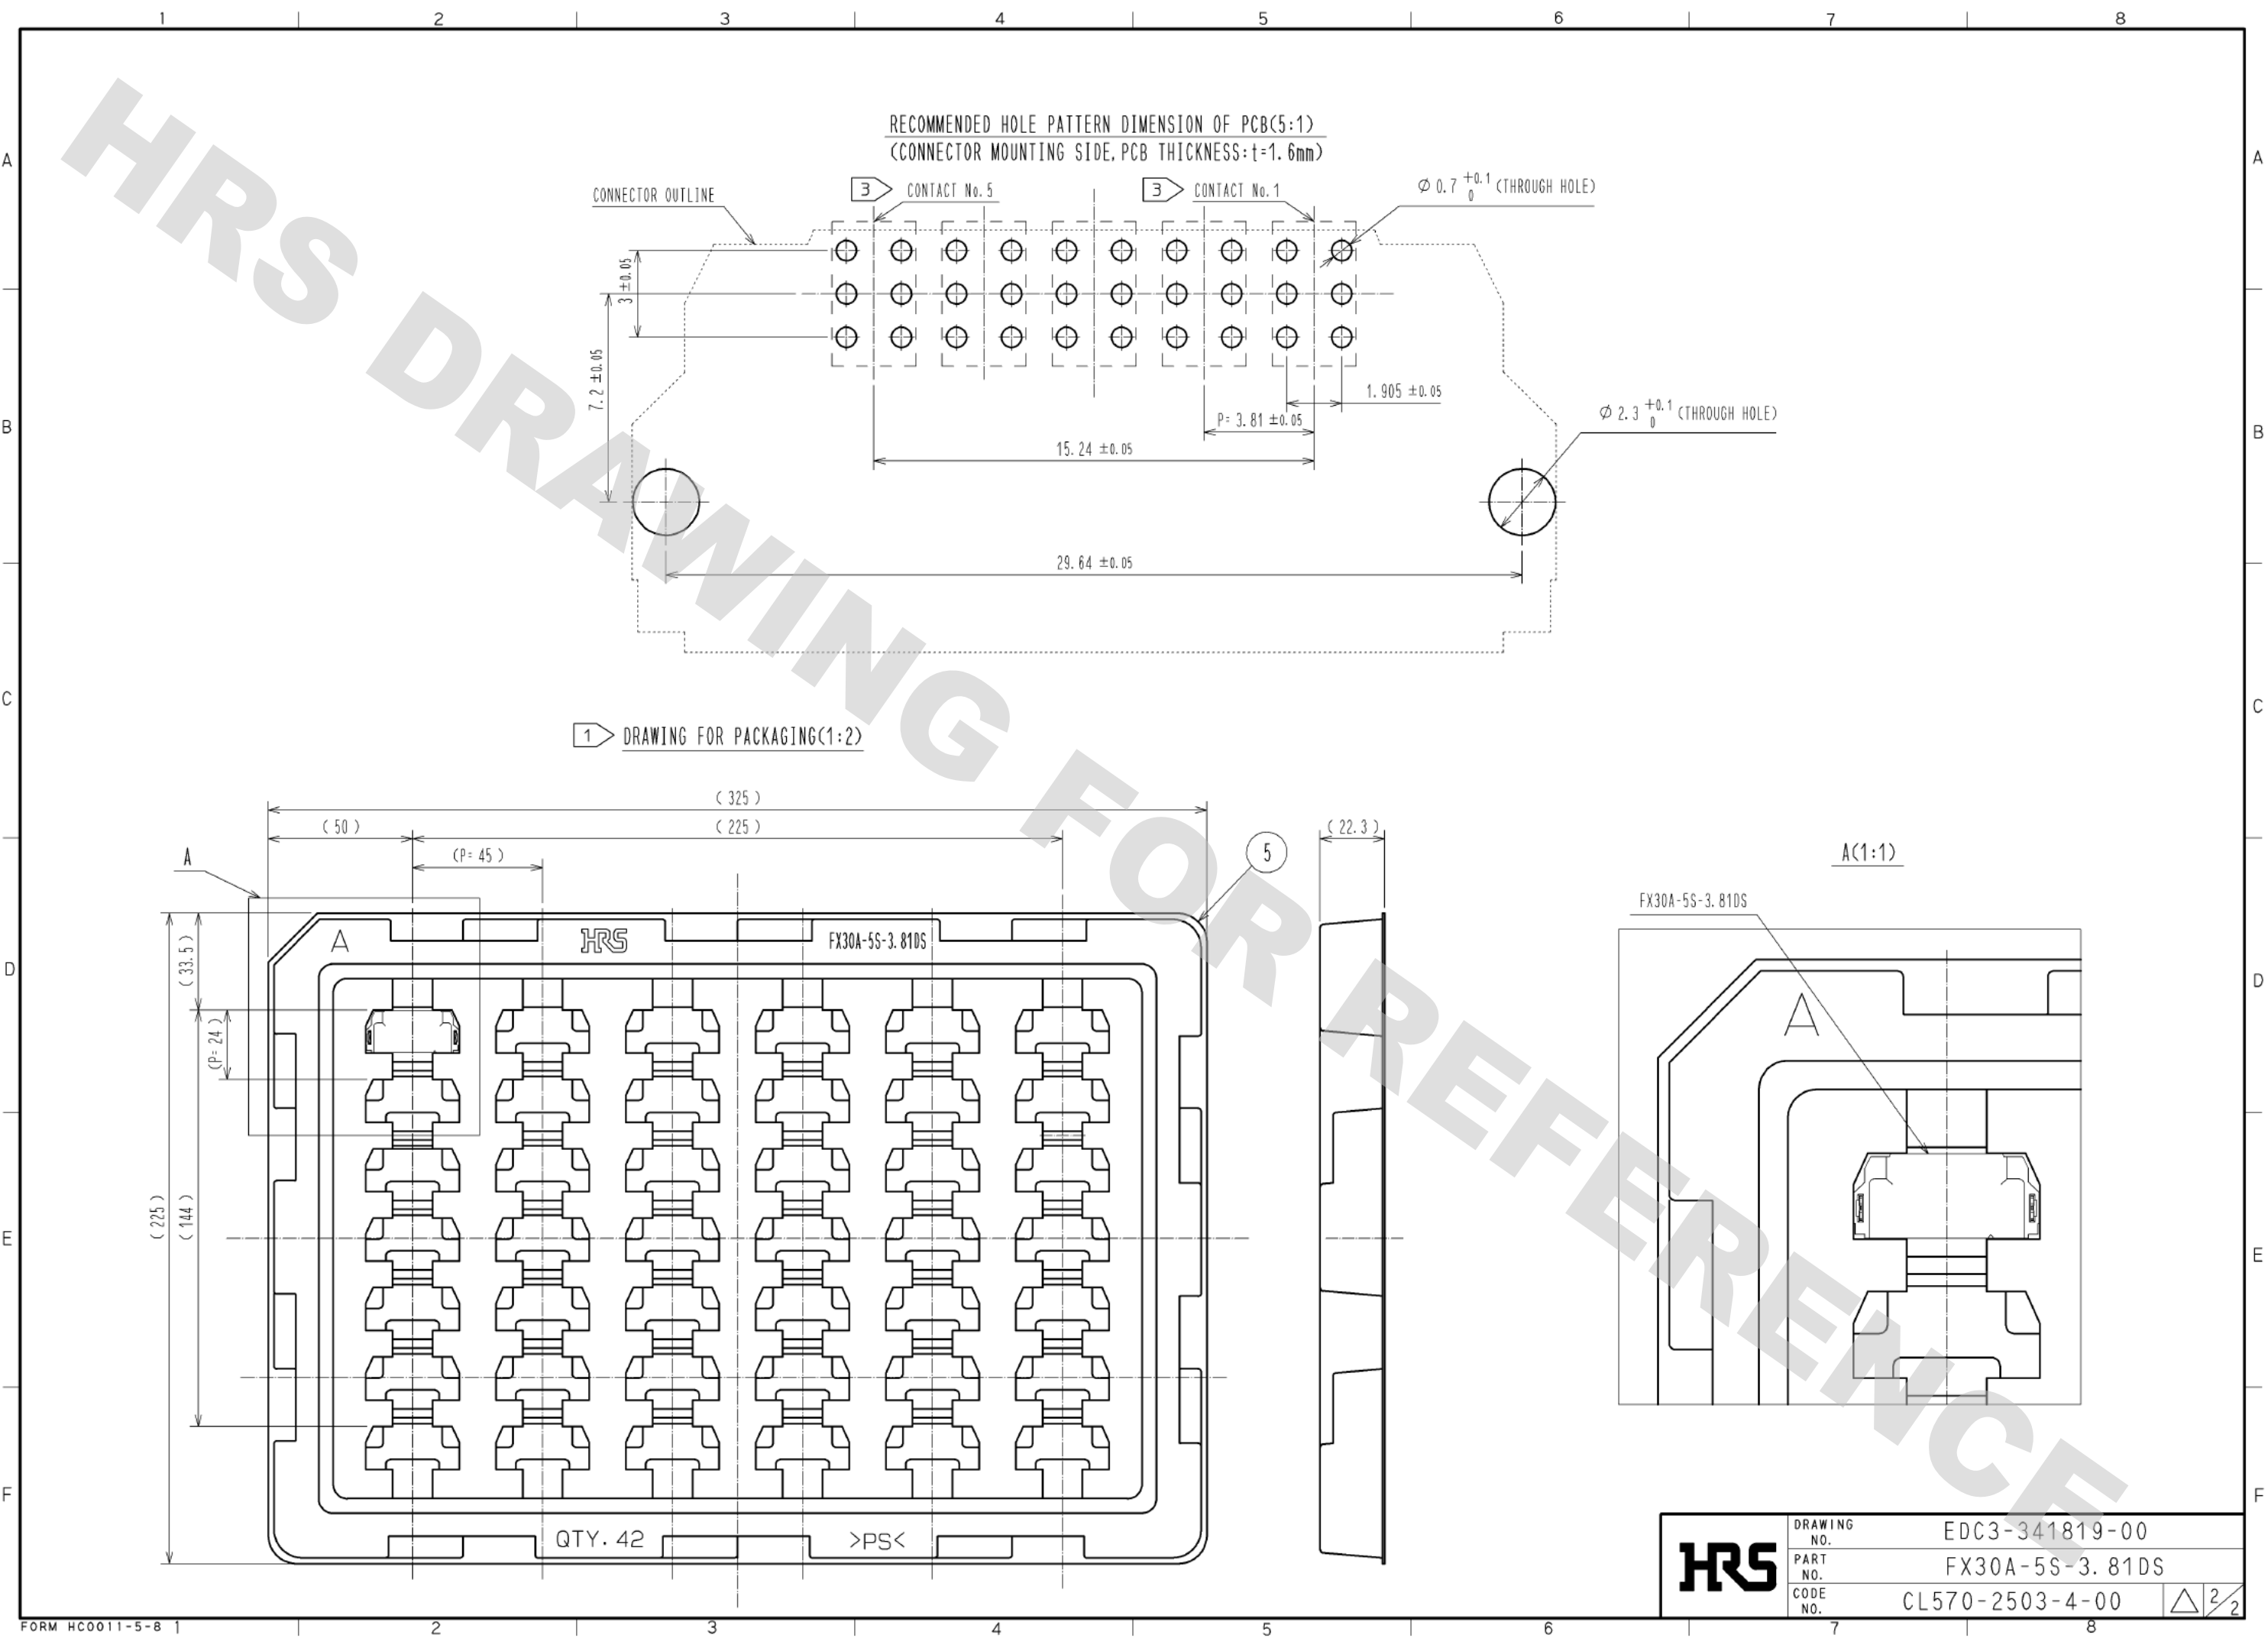

HRS	DRAWING NO.	EDC3-341819-00
	PART NO.	FX30A-5S-3.81DS
	CODE NO.	CL570-2503-4-00
		$\triangle$ 2/2