


22mm Non-Illuminated Mushroom Metal Operators



Certified for
NEMA Type 4X
12 environment.

Mushroom


*Momentary
with mounting bracket*

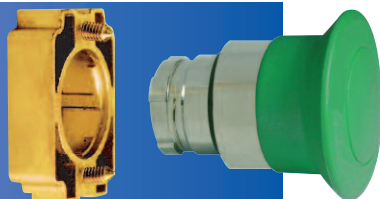

Color	Description	Cat No.
White	40mm, Head	2AM1
Black	40mm, Head	2AM2
Green	40mm, Head	2AM3
Red	40mm, Head	2AM4
Blue	40mm, Head	2AM6
Yellow	40mm, Head	2AM8

Mushroom


*Momentary Large
with mounting bracket*

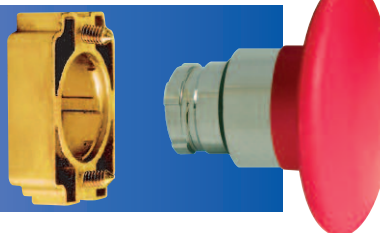

Color	Description	Cat No.
White	60mm, Head	2AMJ1
Black	60mm, Head	2AMJ2
Green	60mm, Head	2AMJ3
Red	60mm, Head	2AMJ4
Blue	60mm, Head	2AMJ6
Yellow	60mm, Head	2AMJ8

Mushroom


*Push-Pull
with mounting bracket*

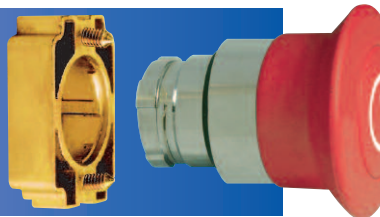

Color	Description	Cat No.
White	40mm, Head	2AMPP1
Black	40mm, Head	2AMPP2
Green	40mm, Head	2AMPP3
Red	40mm, Head	2AMPP4
Blue	40mm, Head	2AMPP6
Yellow	40mm, Head	2AMPP8

Mushroom

*Push-Pull Large
with mounting bracket*

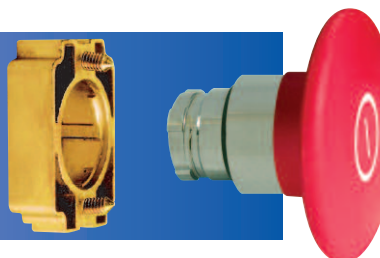


Color	Description	Cat No.
White	60mm, Head	2AMPPJ1
Black	60mm, Head	2AMPPJ2
Green	60mm, Head	2AMPPJ3
Red	60mm, Head	2AMPPJ4
Blue	60mm, Head	2AMPPJ6
Yellow	60mm, Head	2AMPPJ8

Markings on Request



Switch Contacts

(sold separately)



- Heavy-duty contact blocks with mounting screws. Blocks can be stacked 2 blocks across by 3 blocks deep for a total of 6 circuits.
- Contact blocks are available with silver contacts or gold plated contacts
- Self-wiping contacts

Panel Mount

Normally Open Silver	S1
Normally Closed Silver	S2
Normally Open Gold Plated	S3
Normally Closed Gold Plated	S4

Base Mount*

Normally Open Silver	S5
Normally Closed Silver	S6
Normally Open Gold Plated	S7
Normally Closed Gold Plated	S8


* For use with non-illuminated operators in thermoplastic or aluminum enclosures listed on pages 30 and 36-37.

22mm Non-Illuminated Mushroom Metal Operators


Dimensional Drawings

All dimensions shown in millimeters.
To convert to inches multiply by 0.03937


Mushroom Momentary

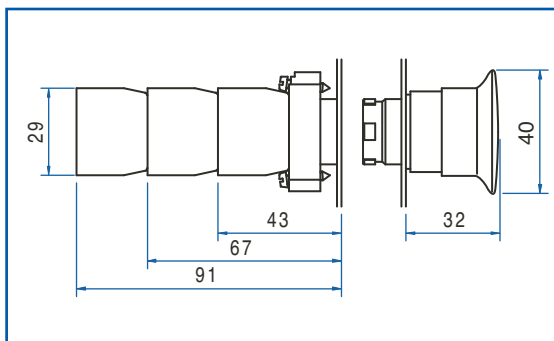


Mushroom Momentary Large

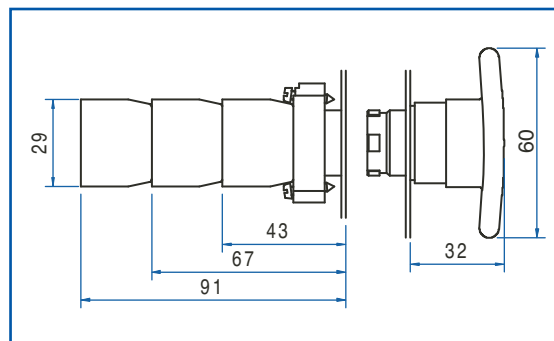

Mushroom Push-Pull

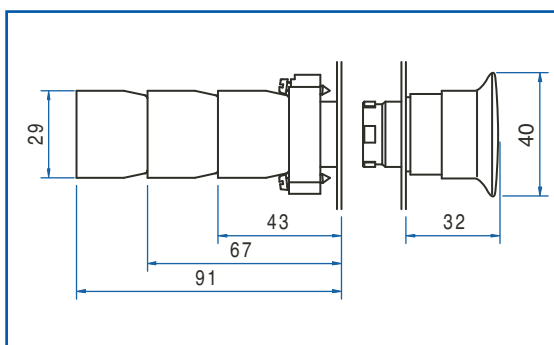


Mushroom Push-Pull Large

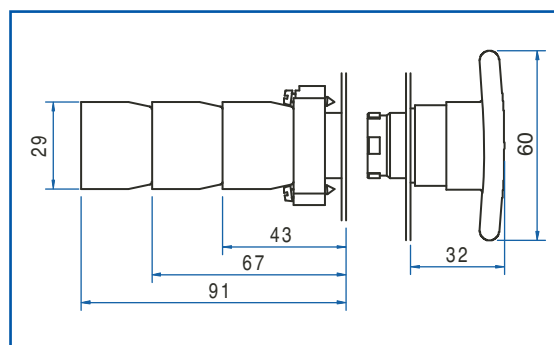

Exploded Assembly View

- Up to six switch contacts can be installed on any non-illuminated operator.
- Switch contacts and operators are sold separately. Preassembled push buttons are available on request.

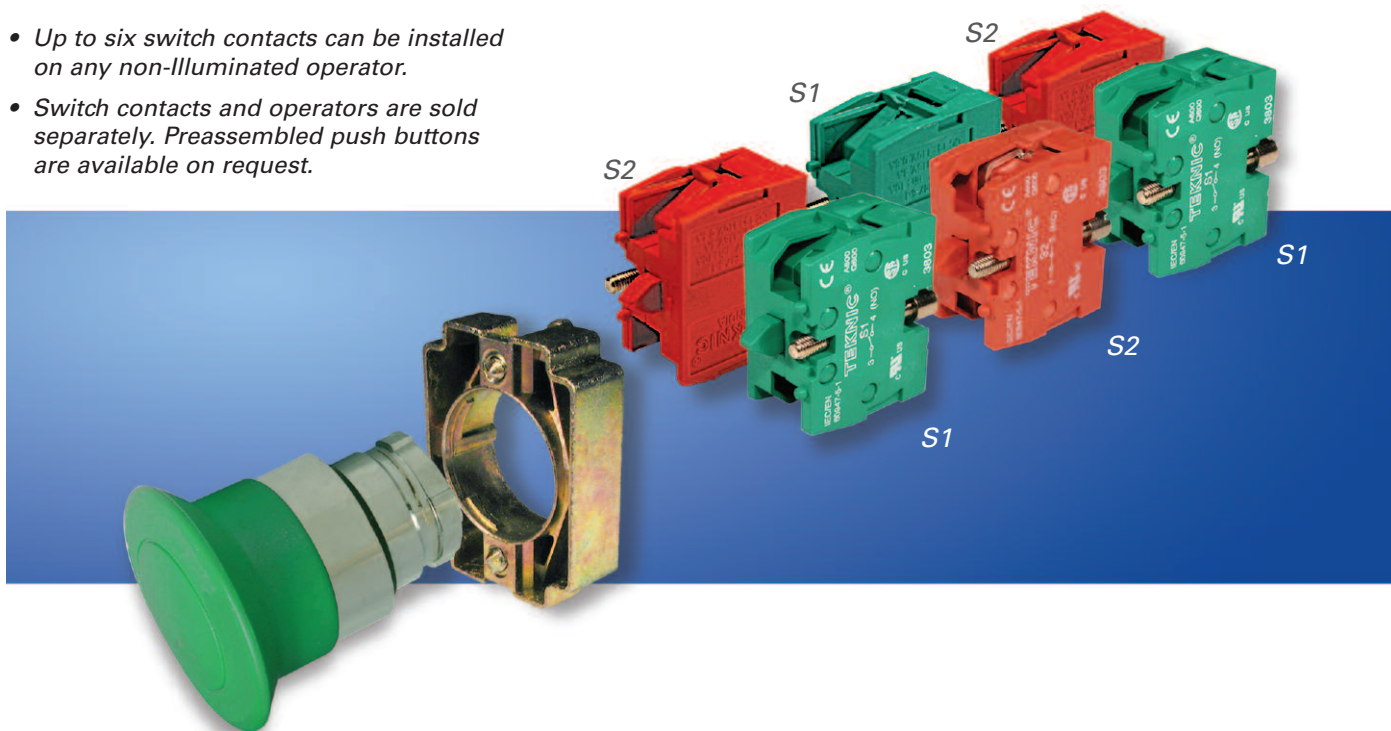

22mm Specifications

Electrical and Mechanical Characteristics

Standard conformity:	IEC 60947-5-1
Approvals:	VDE0660 CSA - C22.2 No. 14-95 UL508 IEC 947 - 5 (1) 1990, IS 13947 ASTA UK certified as per IEC 947 - 5 - (1) 1990
Degree of protection:	IP 65 as per IEC 529 NEMA Type 4X, 12 as per UL50
Temperature Range:	- 25°C to + 70°C (-13°F to +158°F)

Contact Block

Rated voltage:	600V AC /DC
Rated current:	10A AC / 2.5A DC
Contact operation:	self-wiping, slow break NO or NC
UL508 rating (pilot duty):	
CSA - C22.2 No. 14-95:	A600: 10A; 600V AC Q600: 2.5A; 600V DC
Make and break capacity	
IEC 947 - 5 - (1) 1990:	AC 15 4A, 415V AC DC 13 0.5A, 110V DC
Terminal capacity:	minimum 20 AWG (0.5 mm ²) maximum 2x16 AWG (2 x 1.5 mm ²) or 14 AWG (2.5 mm ²)
Terminal marking:	1-2 for NC, 3-4 for NO
Short circuit protection:	10A cartridge fuse HRC type, rated for resistive loads
Mechanical life:	1 million operations

Modules for Pilot Lights & Illuminated Switches with LED Bulbs

Current consumption (applicable to all colors)	
24 VAC/DC, 100 VAC & 240 VAC:	max. 20 mA
110 VDC:	max. 15 mA
220 VDC:	max. 10 mA
Service life (at nominal voltage and at ambient temperature of 25°C):	100,000 hours
Voltage limits (nominal voltage):	<20% of rated voltage>
Short circuit protection:	on specific request
Terminal capacity:	min. 1 x 0.5 mm ² (20 AWG), max. 2 x 1.5 mm ² (2x16 AWG) or 1 x 2.5 mm ² (1x14 AWG)