


Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

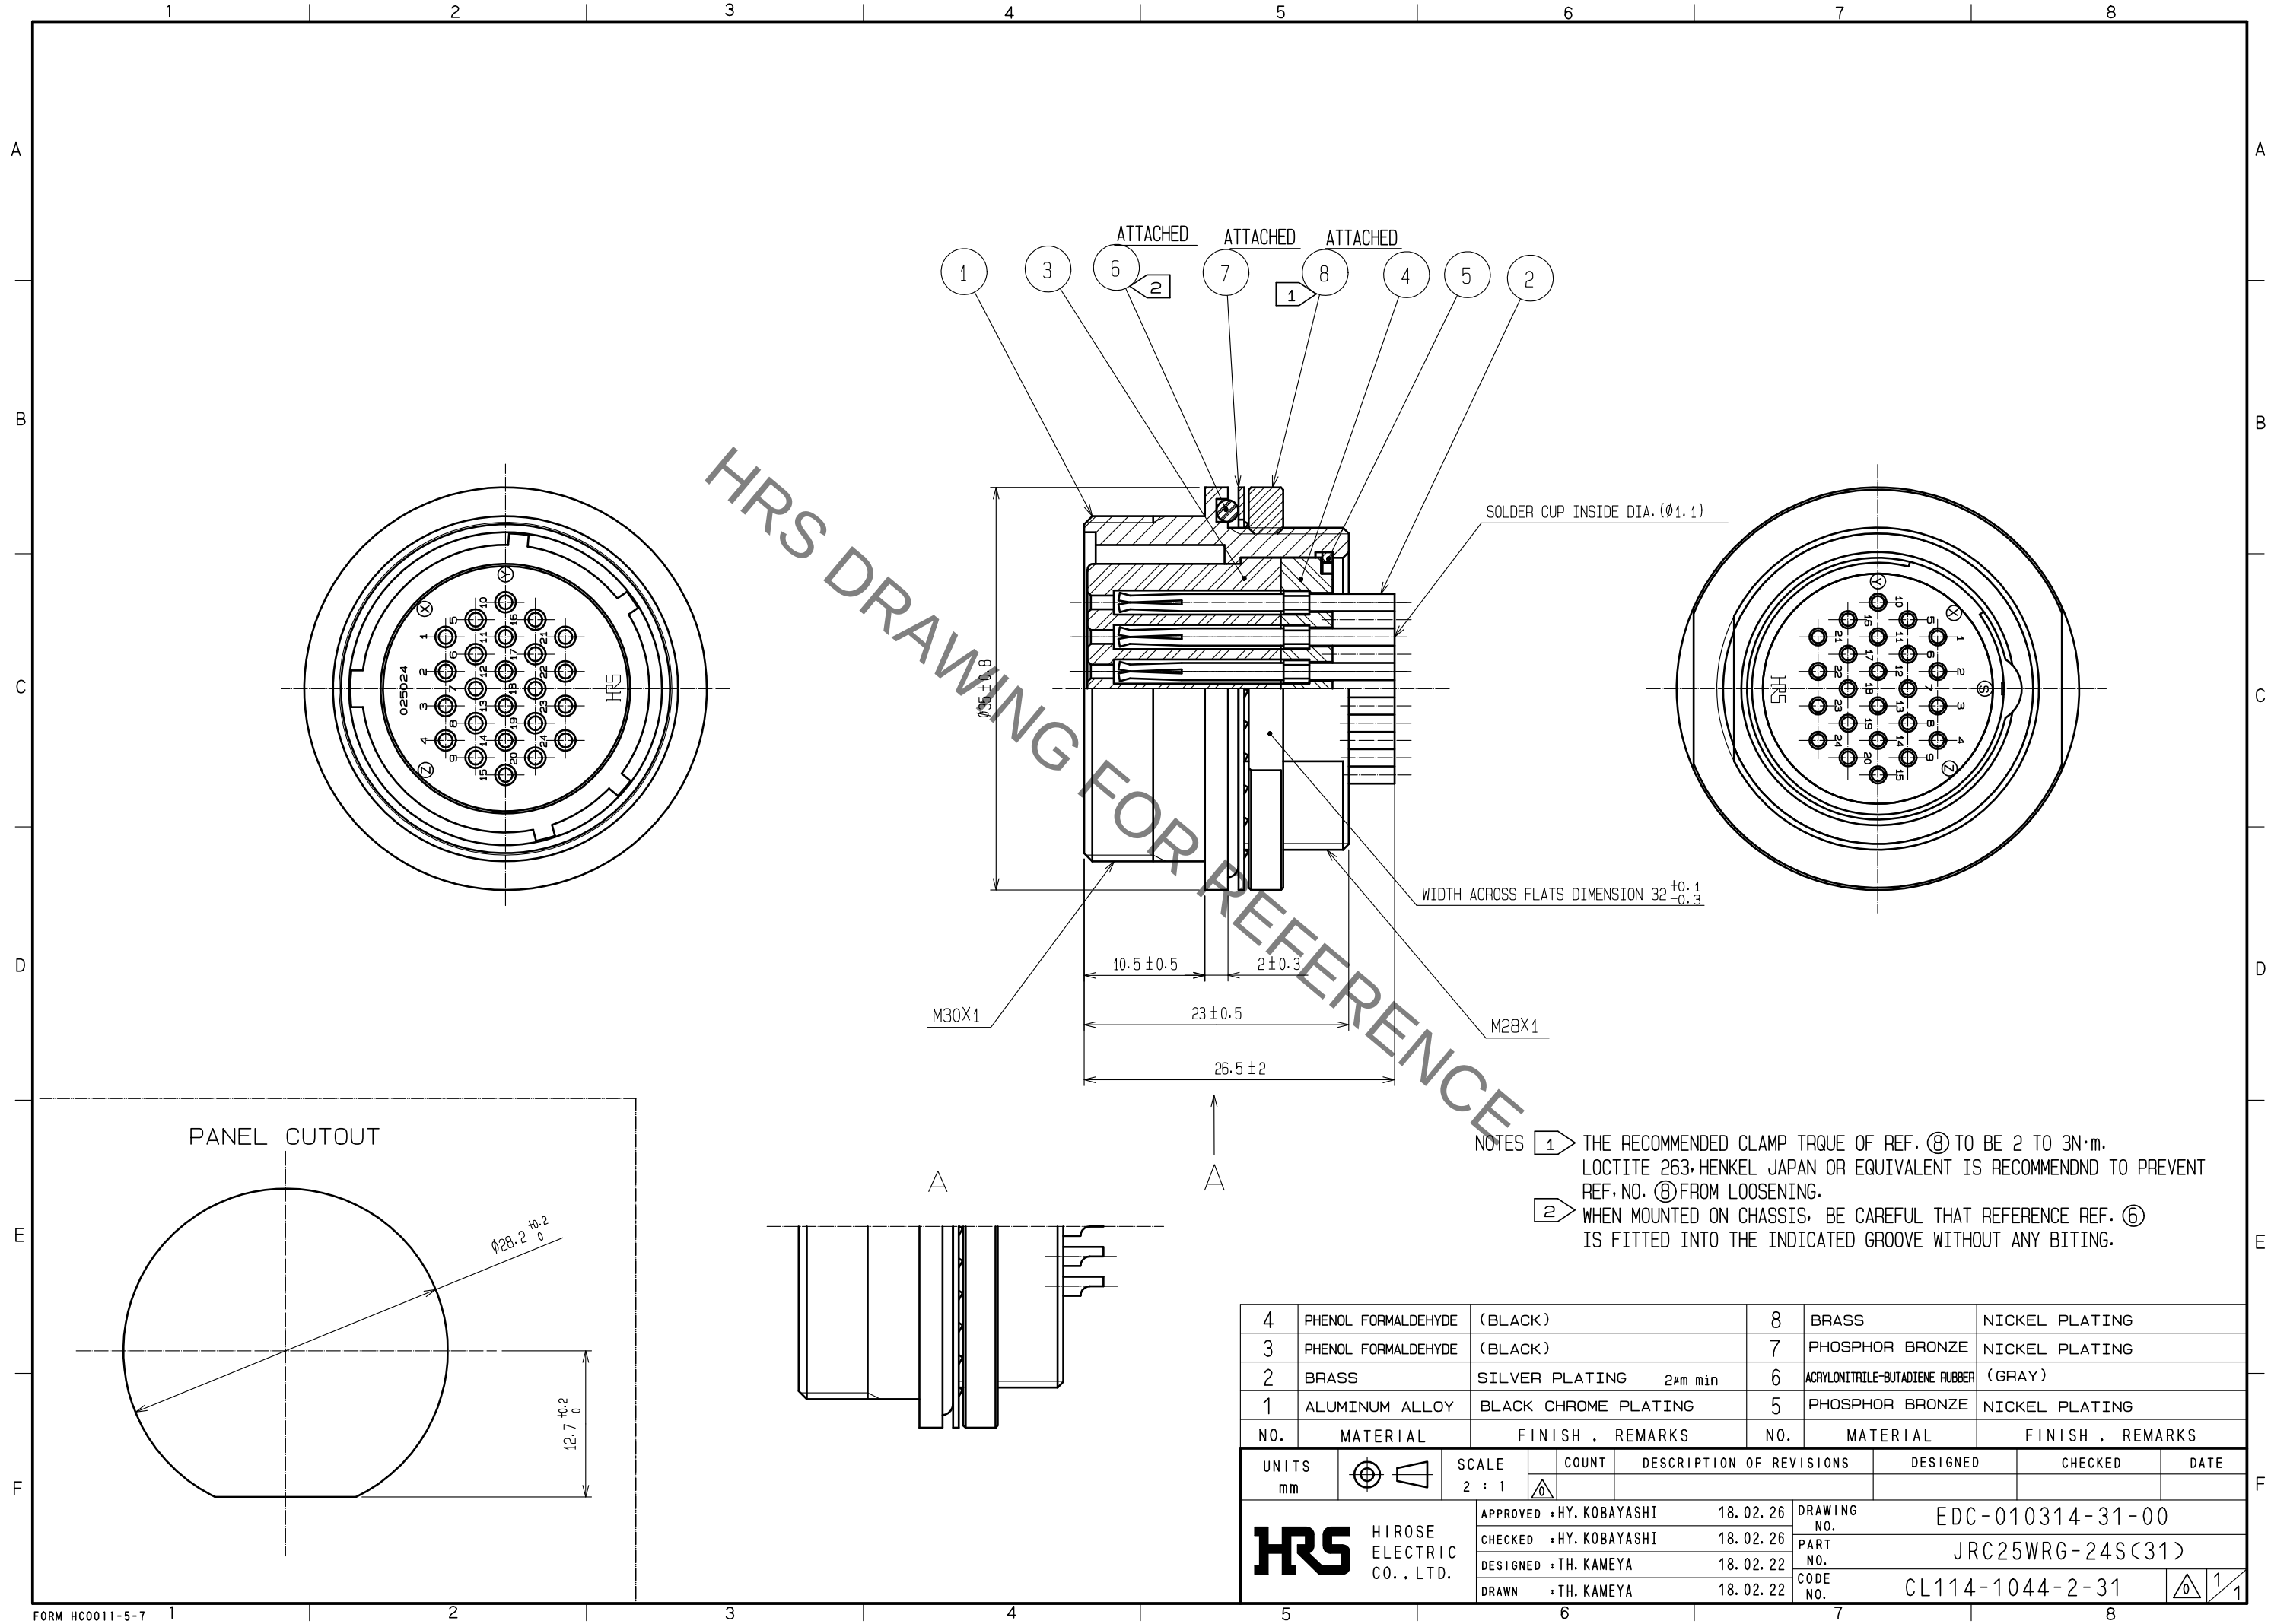

NOTES ① THE RECOMMENDED CLAMP TORQUE OF REF. ⑧ TO BE 2 TO 3N·m.
LOCTITE 263, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDD TO PREVENT
REF. NO. ⑧ FROM LOOSENING.
② WHEN MOUNTED ON CHASSIS, BE CAREFUL THAT REFERENCE REF. ⑥
IS FITTED INTO THE INDICATED GROOVE WITHOUT ANY BITING.

4	PHENOL FORMALDEHYDE	(BLACK)	8	BRASS	NICKEL PLATING
3	PHENOL FORMALDEHYDE	(BLACK)	7	PHOSPHOR BRONZE	NICKEL PLATING
2	BRASS	SILVER PLATING 2μm min	6	ACRYLONITRILE-BUTADIENE RUBBER	(GRAY)
1	ALUMINUM ALLOY	BLACK CHROME PLATING	5	PHOSPHOR BRONZE	NICKEL PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
HIROSE ELECTRIC CO., LTD.		APPROVED : HY. KOBAYASHI	18. 02. 26	DRAWING NO.	EDC-010314-31-00
		CHECKED : HY. KOBAYASHI	18. 02. 26	PART NO.	JRC25WRG-24S(31)
		DESIGNED : TH. KAMEYA	18. 02. 22	CODE NO.	CL114-1044-2-31
		DRAWN : TH. KAMEYA	18. 02. 22		