


### MATERIAL & FINISHES:

- SHELL: Aluminum alloy, Yellow Bichromated Cadmium plated.
- INSERT RETENTION CLIP: Beryllium copper, Cadmium plated.
- JACKSCREW: Stainless Steel,
- DUST CAP: High grade thermoplastic.




**NOTES:**

- Jackscrew for N, R, W, X, Y & Z polarization, installed in "N" position,
- Dust caps installed on each cavity,
- The inserts and the contacts have to be ordered separately.

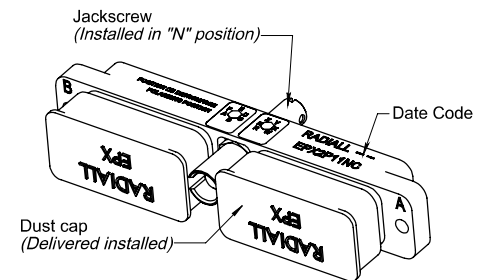


**PANEL CUT-OUT :**

(View from Connector Mating Side)

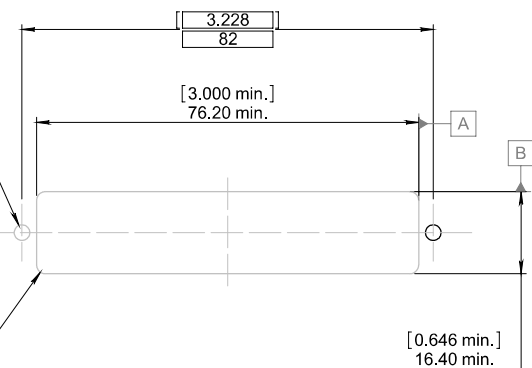

**DIMENSIONS : mm (inch are given for information only)**



Estimated weight : 29 g

<b>CREATION</b>  <b>PEN:</b>  <b>NOM:</b> PAILOT N. <b>DATE:</b> Jan 19, 2023 <b>APPR.:</b> WEIHS H.				
	/	/	/	/
	Issue	Revisions	Name	Approved

**EPX2P11NCEN**

**RADIALL PROPRIETARY INFORMATION**

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from RADIALL. This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.