
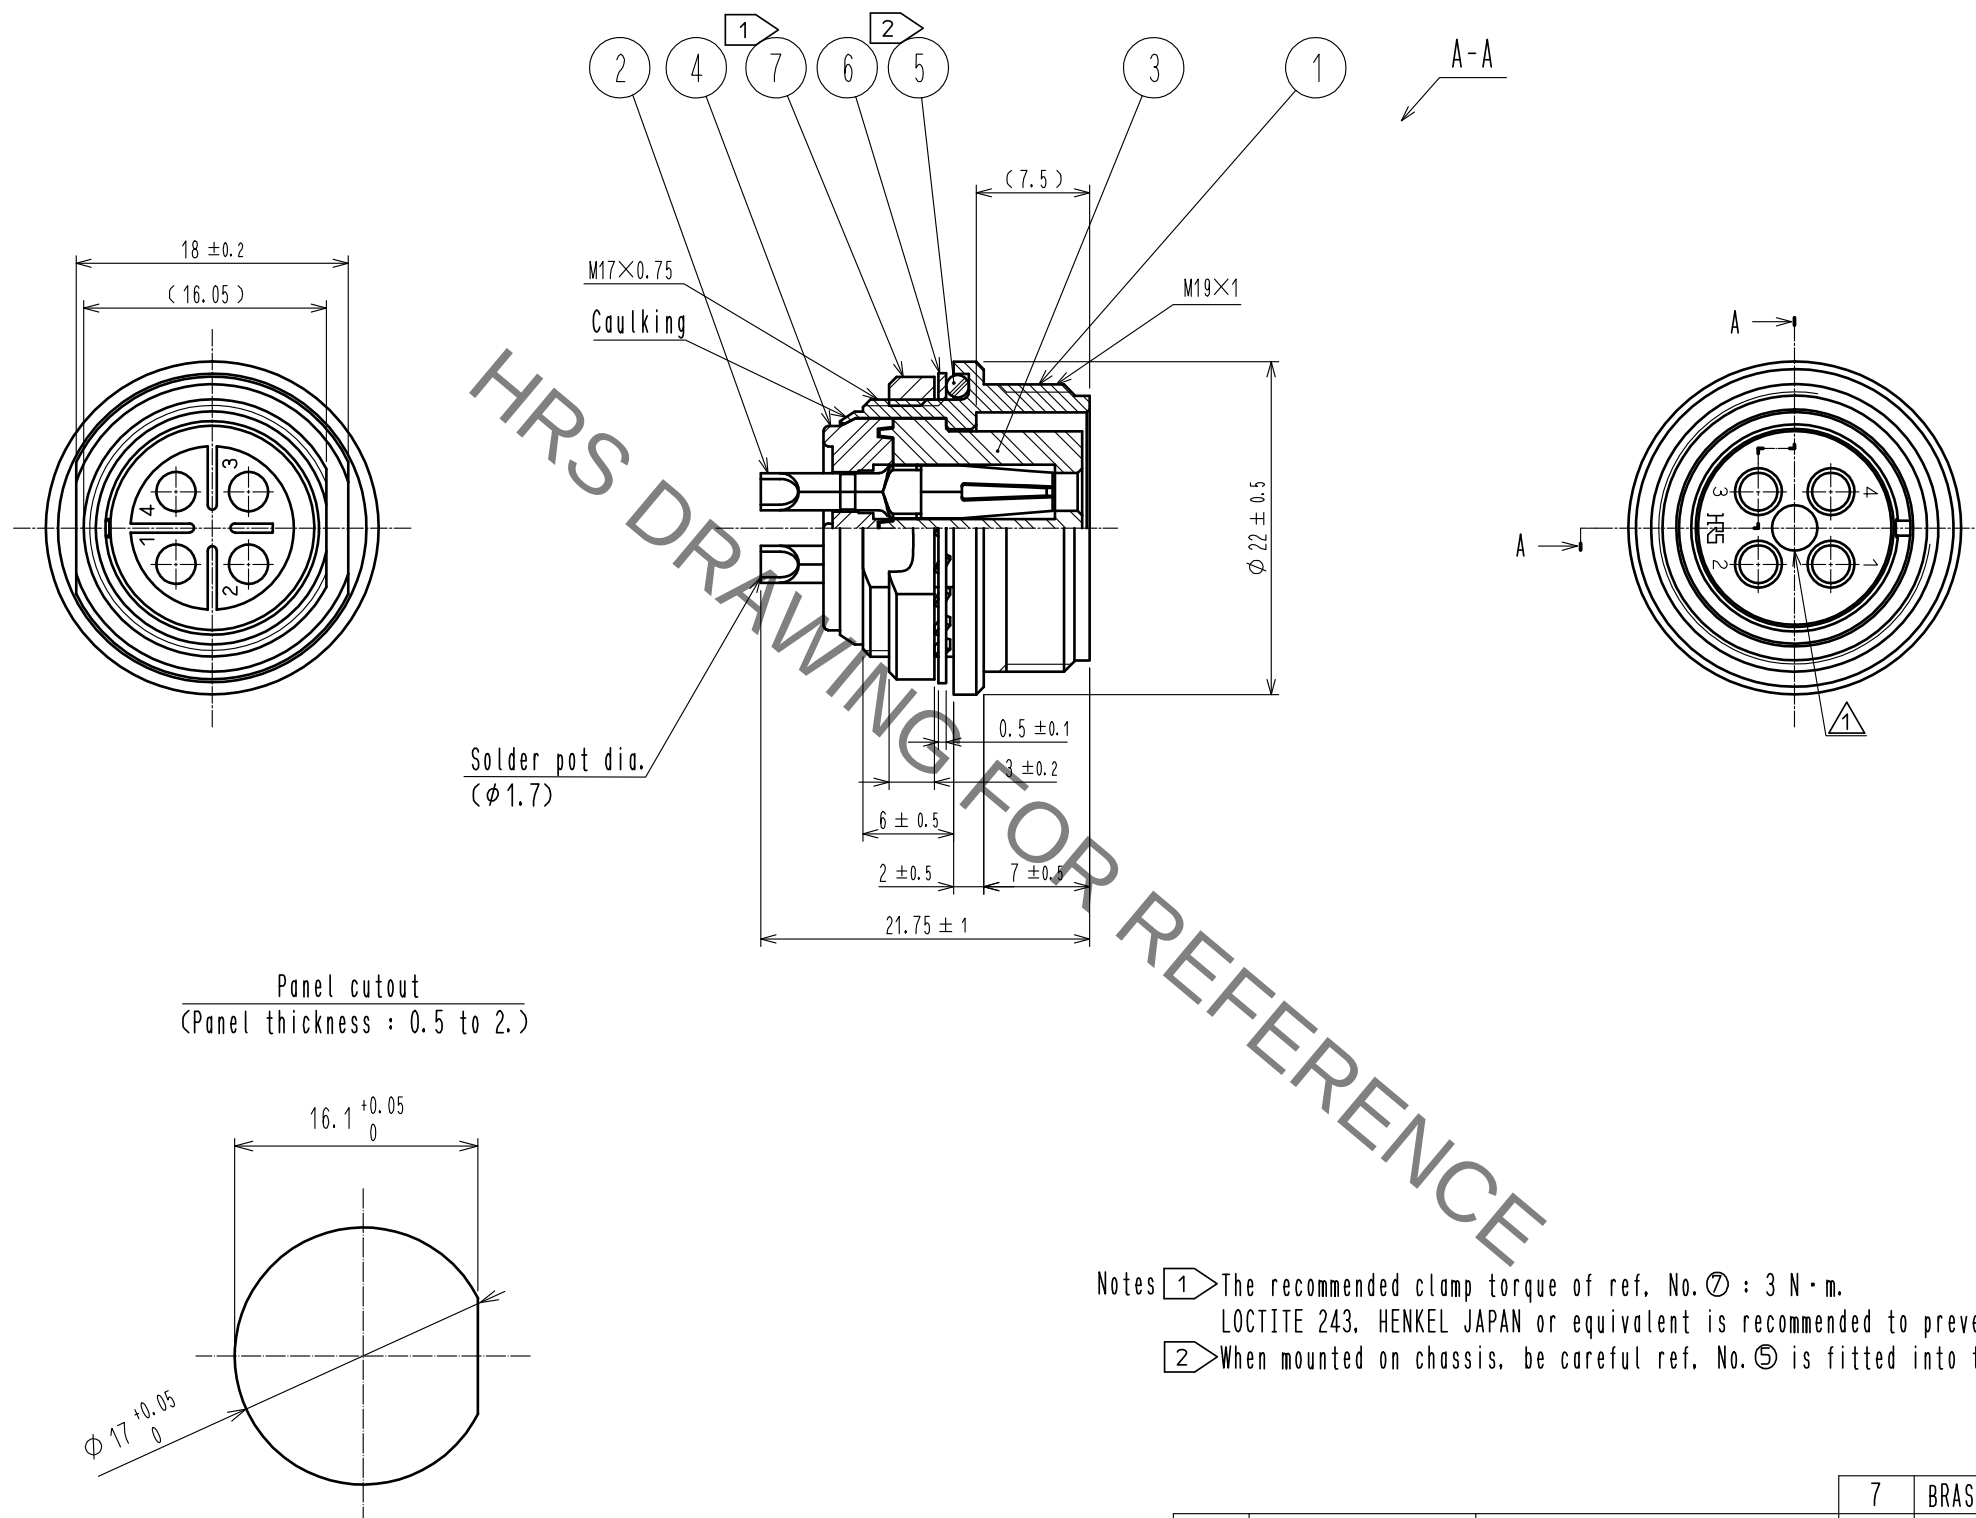


Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



- Notes ① The recommended clamp torque of ref. No. ⑦ : 3 N·m.
LOCTITE 243, HENKEL JAPAN or equivalent is recommended to prevent ref. No. ⑦ from loosening.
② When mounted on chassis, be careful ref. No. ⑤ is fitted into the indicates groove any biting.

3	PPS	(BLACK)	UL94V-0	7	BRASS	NICKEL PLATING		
2	COPPER ALLOY	SURFACE : GOLD PLATING 0.2μm min. UNDER : NICKEL PLATING 3μm min.		6	PHOSPHOR BRONZE	NICKEL PLATING		
1	ZINC ALLOY	CHROME PLATING		5	SILICONE RUBBER	(BLACK)		
				4	PPS	(BLACK) UL94V-0		
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1	 COUNT 1	DESCRIPTION OF REVISIONS DIS-C-00000841		DESIGNED KN. IKEHARA	CHECKED HY. KOBAYASHI	DATE 16.03.02
 HIROSE ELECTRIC CO., LTD.		APPROVED : HY. KOBAYASHI	15.11.06	DRAWING NO. EDC-111079-82-00				
		CHECKED : HY. KOBAYASHI	15.11.06	PART NO. RM15WTRZ-4S(82)				
		DESIGNED : KN. IKEHARA	15.11.06	CODE NO. CL109-1639-4-82				
		DRAWN : KN. IKEHARA	15.11.06	 				