

# Actuator

45-  
2131.4F90.000



<https://eao.com/p/45-2131.4F90.000>

Your product:

---



## 45-2131.4F90.000 Actuator

### FRONT

Front dimension:	Ø 38 mm
Front bezel colour:	Sand grey
Front bezel material:	Metal

### MOUNTING

Design:	flush
---------	-------

### OPERATING-/INDICATION PART

Lens illumination:	non illuminative
Lens colour:	White
Lens shape:	flush
Lens material:	Plastic
Lens optics:	opaque

### MECHANICAL CHARACTERISTIC


Weight:	0.073 kg
Switching action:	Momentary
Switching system:	Slow-make switching element
Mechanical lifetime:	500 000 cycles of operation
Operating frequency:	Max. 3 600/h

### AMBIENT CONDITION

<b>IP front protection:</b>	IP66, IP67, IP69K
<b>Operating temperature:</b>	– 25 °C ... + 70 °C
<b>Storage temperature:</b>	– 40 °C ... + 80 °C
<b>Climate resistance:</b>	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6
<b>Shock resistance:</b>	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
<b>Vibration resistance:</b>	According to IEC 60068-2-6: 20 ... 500 Hz: 5 g

## OTHER

<b>Housing colour:</b>	Silver
<b>Housing material:</b>	Metal
<b>Short Description:</b>	Actuator, Ø 38 mm, flush, non illuminative, White, Plastic, opaque, Sand grey, Metal, Momentary, IP66, IP67, IP69K
<b>Hints:</b>	Front panel thickness 1 ... 6 mm
<b>Wiring diagrams:</b>	

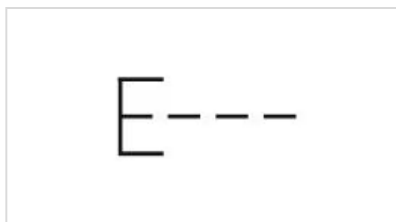

## Dimension drawings:

