

www.lemo.com

FFG.2B.436.CJLD99

SUMMARY

Wires

High voltage 6



Image is for illustrative purpose only

2B **Series**

Female solder Termination type

IP rating 50

AWG wire size 0.00 - 0.00 Cable Ø 9.30 - 9.90 mm

Status active

Matching parts EGG.2B.436.CJA

Download

Request a quote

TECHNICAL DETAILS

Mechanics

Shell Style/Model FF*: Straight plug, non-latching, cable collet

Keying 1 key (alpha=0, plug: male contacts, receptacle: female contacts)

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] **Housing Material**

brass latch sleeve and mid pieces

Weight 29.56 g

Performance

Configuration 2B.436: 6 High Voltage

Insulator J: PEEK/PEEK

Rated Current 3 Amps

Specifications

Contact Type: Solder Test voltage (kV DC) 9 Test voltage (kV AC) 6.4

Creepage distance min.: 4.7 mm

Others

Endurance (Shell): 5000


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Temp (min / max): -55°C / +250°C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [6 ms] Climatical Category: 50/175/21 Shielding (min): 75 dB (10 MHz) Shielding (min): 40 dB (1 GHz) Salt Spray Corrosion: >1000 hr

DRAWINGS

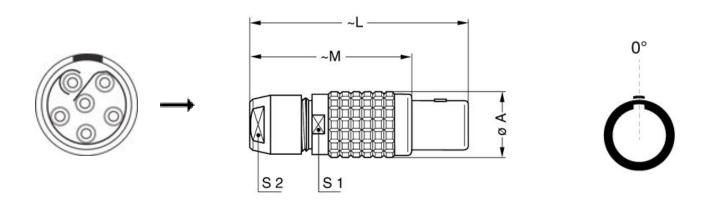

Dimensions

	А	L	М	S 1	S2
mm.	15	50	38	13	12
in.	0,59	1,97	1,50	0,51	0,47

RECOMMENDED BY LEMO

Tools

Spanner wrench: DCD.2B.025.PA120

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

