

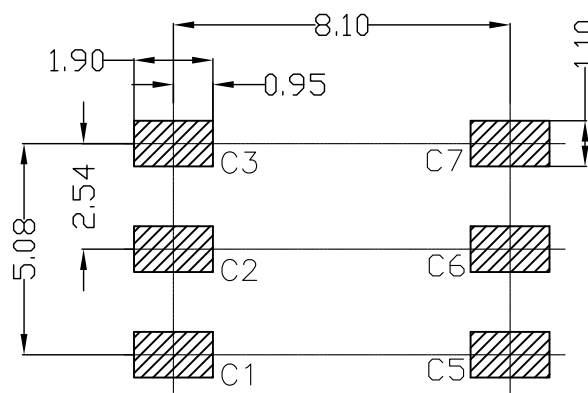
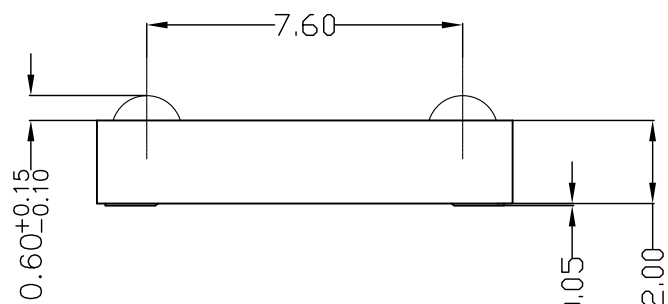


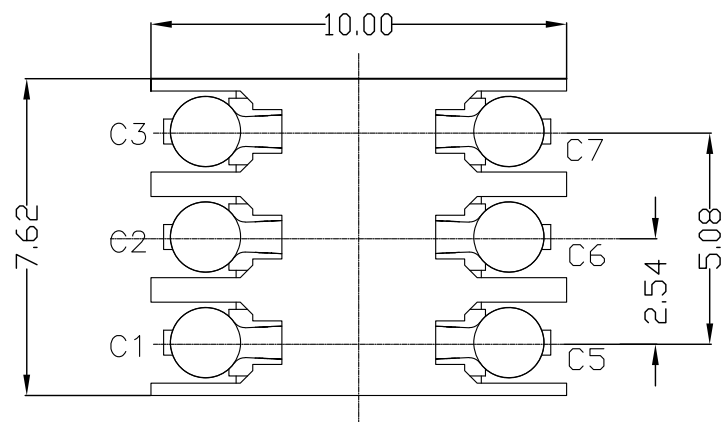

Recommended P.C.B Layout
(Tolerance= 0.05)

SIM CARD	
PIN NO.	DESCRIPTION
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

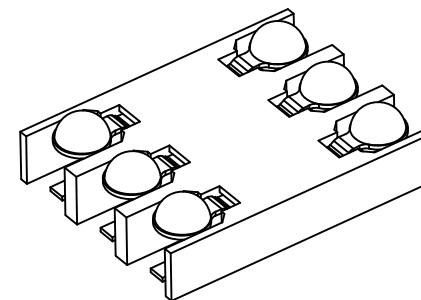

NOTES:

- Material:
Housing: LCP UL 94V-0
Contact: Phosphor copper
- Finish :
Contact: G/F" Gold plated on contact area;
G/F plated on solder tails, Base Nickel : 30u"Min
- Electrical Requirements:
3.1 Current: 0.5A
3.2 Voltage: 100V
3.3 Contact Resistance: 100mΩ MAX
3.4 Insulation Resistance: 100MΩ Min
- Mechanical
Durability 1500 CYCLES



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 简易SIM 6PIN 2.0H	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYCW218-SIM06-200B
	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO:	HYC-2303161106
	SCALE: 1:1	SIZE: A4	SHEET NO.	1 OF 1