

MBF1565D33


BAW Band Pass Filter For GNSS Antenna



MECSINE 兆讯

Applications

- 1, LTE Small & Base Station
- 2, DAS, PICO
- 3, GNSS Antenna



Features

- 1, Package size 3.0 x3.0 mm
- 2, Low insertion loss
- 3, High Rejection

Description


MBF1565D33 is a filter for GNSS antenna, which is designed with BAW technology. The product can provide low insertion loss and rejection. The typical insertion loss in the pass band is less than 1.5dB. The MBF1565D33 uses advanced module packing techniques to achieve the industry standard 3.0x3.0mm package.

Electrical Specification

Characteristic	Minimum	Typical	Maximum	Units
Insertion Loss(1525~ 1605 MHz)		1.0	2	dB
Ripple(1525~ 1605 MHz)			1.2	dB
VSWR(2515~ 2675 MHz)			2	
Absolute Attenuation				
10 ~ 960 MHz	35			dB
1166 ~ 1278MH	38			dB
2170 ~ 2370 MH	38			dB
2400 ~ 2483 MH	40			dB
2515 ~ 2675 MH	40			dB
3300~ 3700 MH	35			
Operating Temp.	-40		125	°C
Input Power			32	dBm

All the above data are based on specified demo board and tested in 25° environment.

Pin Configuration

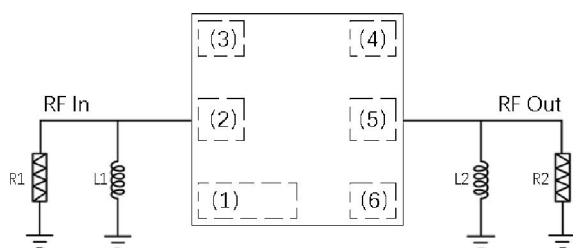

Pin No.	Label
1/3/4/6	GND
2	RF In
5	RF Out

All Use For RF & Microwave


MBF1565D33

BAW Band Pass Filter For GNSS Antenna






MECSINE 兆讯

Outline Drawing

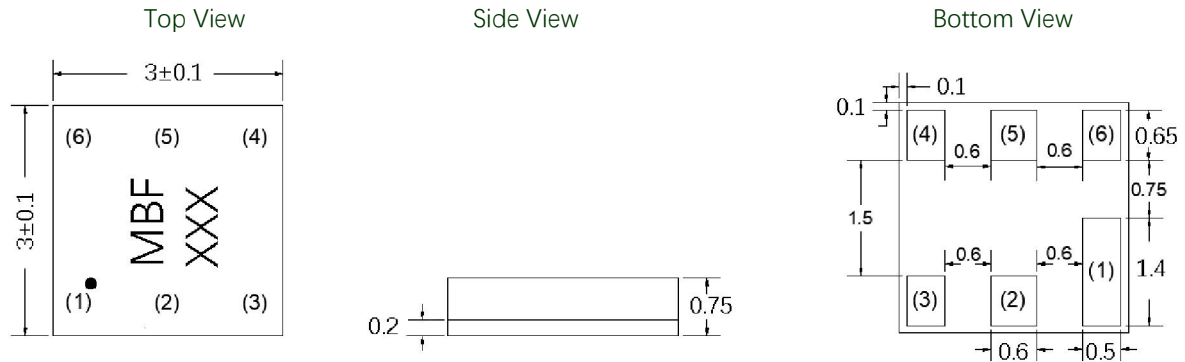

Typical Performance (Temp = +25 °C, 50 Ω system)

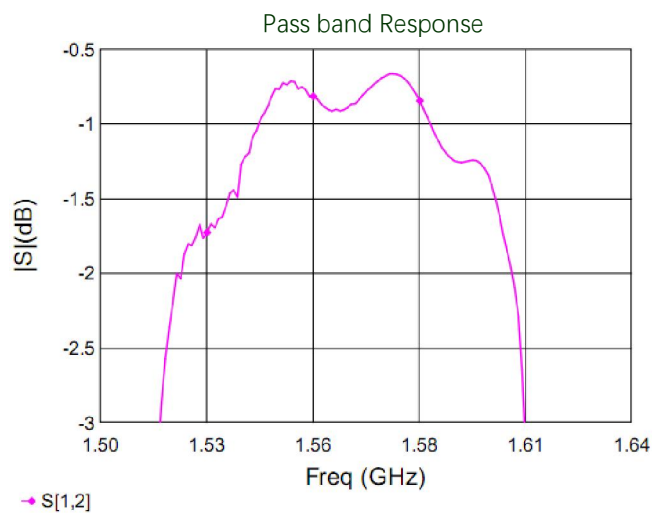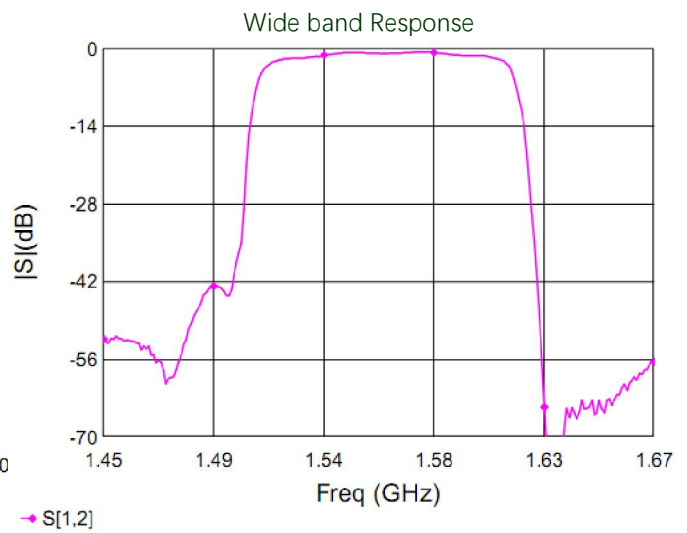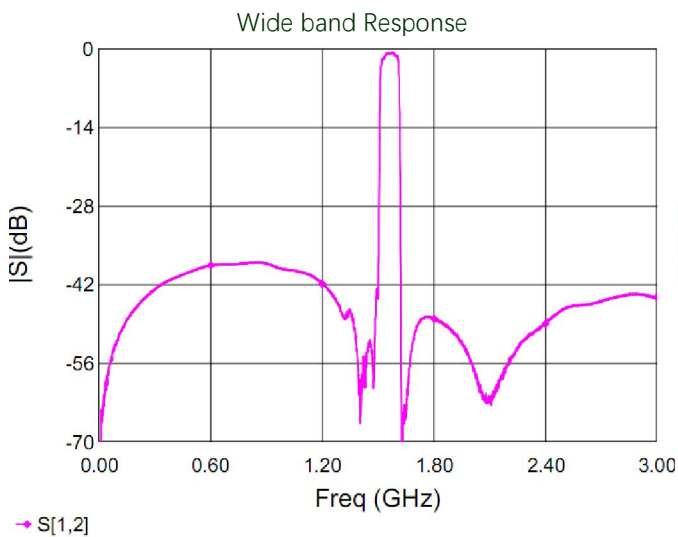

Input Return Loss

Output Return Los





All Use For RF & Microwave

MBF1565D33

BAW Band Pass Filter For GNSS Antenna




MECSINE 兆讯

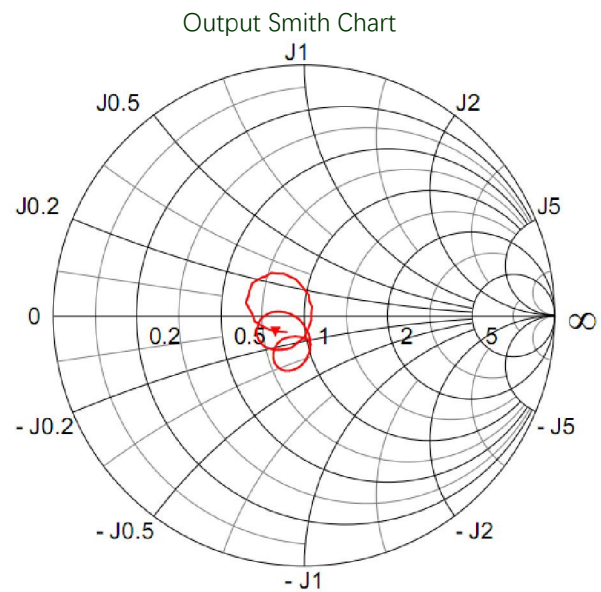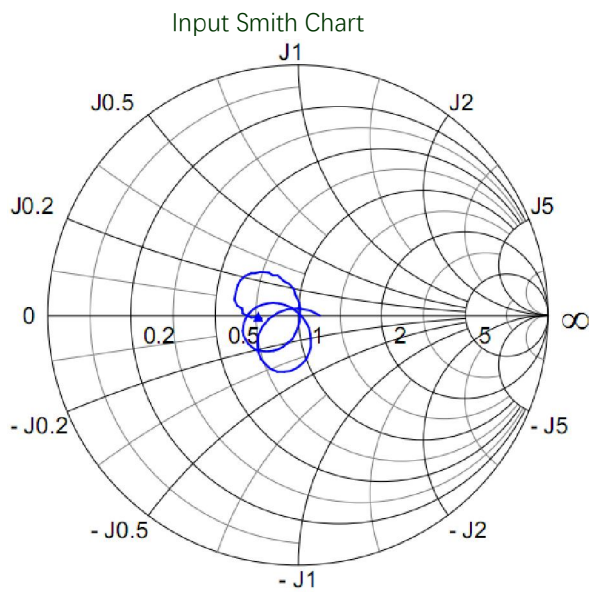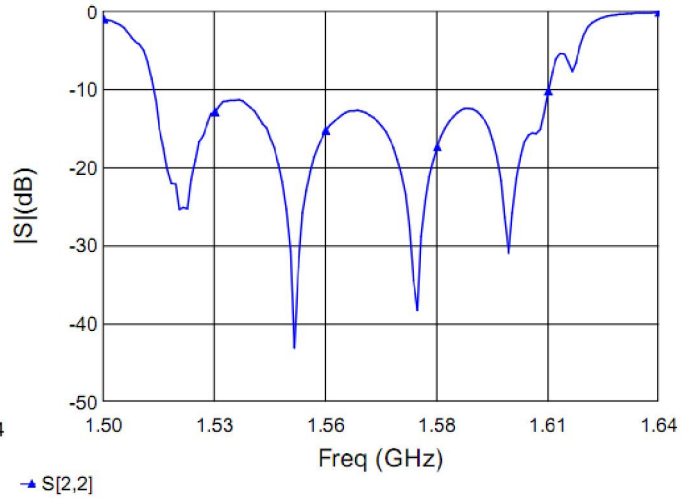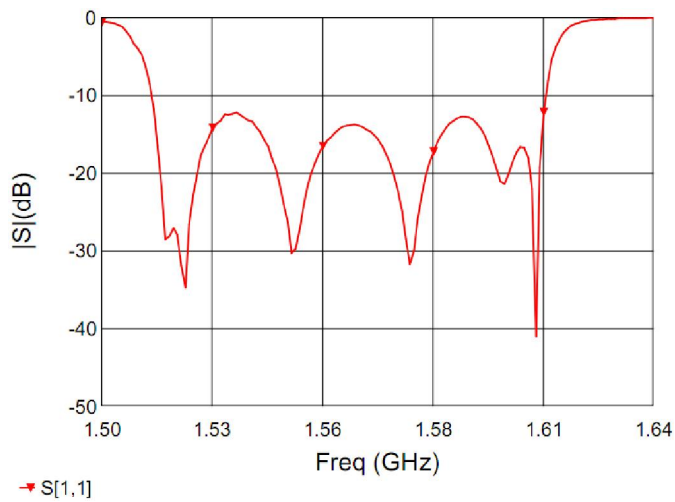

Packaging and Ordering Information

Figure 9. MBF1565D33 Packaging Specifications

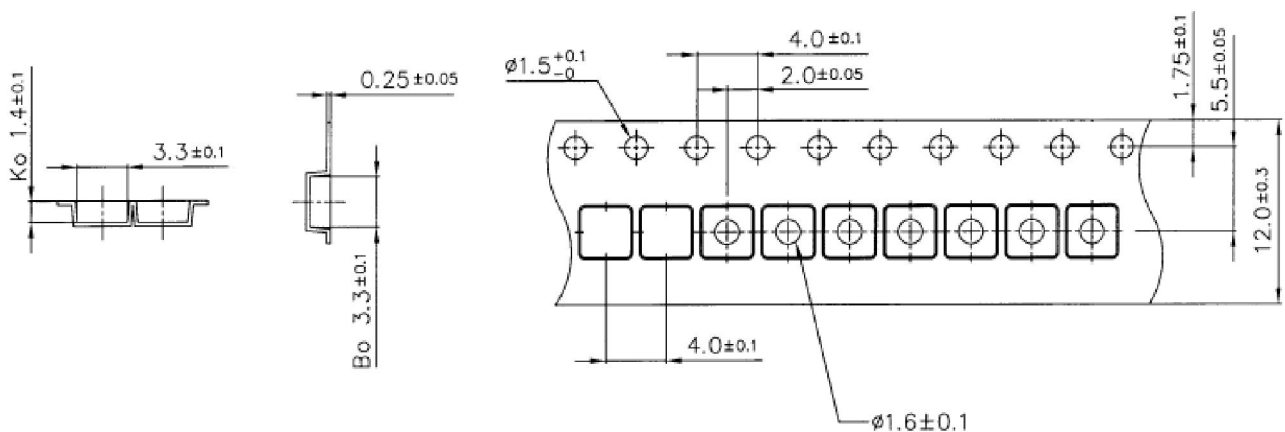

All Use For RF & Microwave

MBF1565D33

BAW Band Pass Filter For GNSS Antenna



MECSINE 兆讯

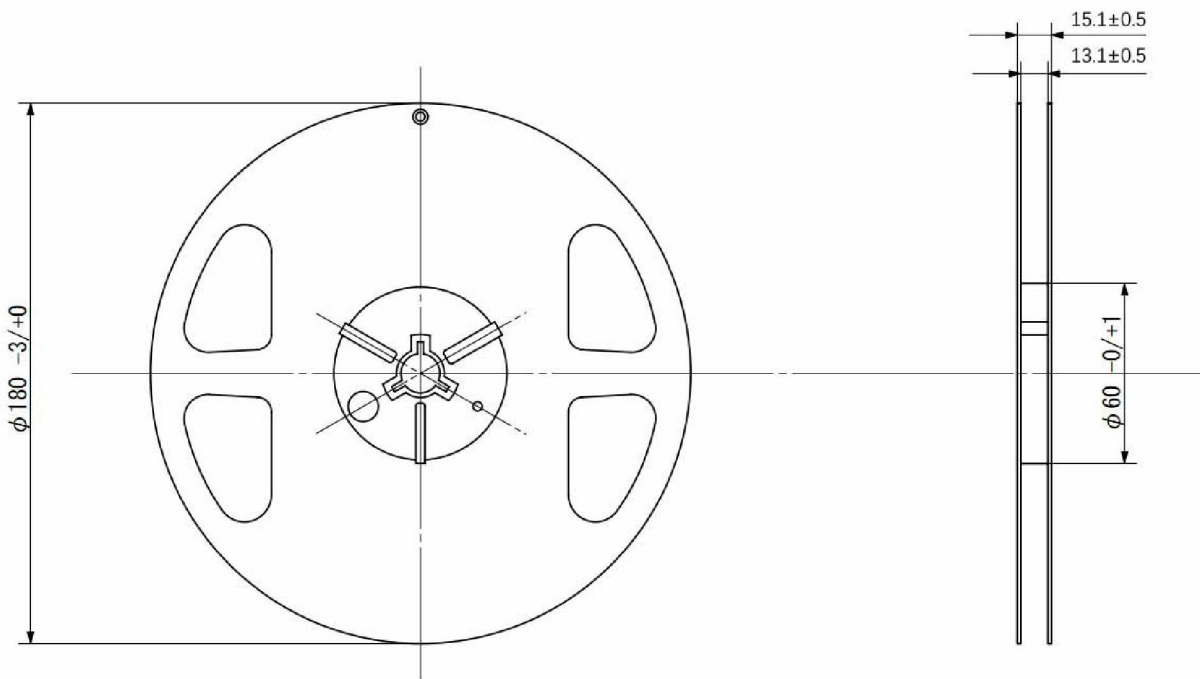


Table 2. MPD1020W2 Ordering Information

Device	Package	Reel	Shipping
MBF1565D33	3*3mm	7"	2000/Reel

All Use For RF & Microwave

MBF1565D33


BAW Band Pass Filter For GNSS Antenna



MECSINE 兆讯

Recommended Reflow Solder Profile

Figure 10. MBF1565D33 Recommended Reflow Solder Profile

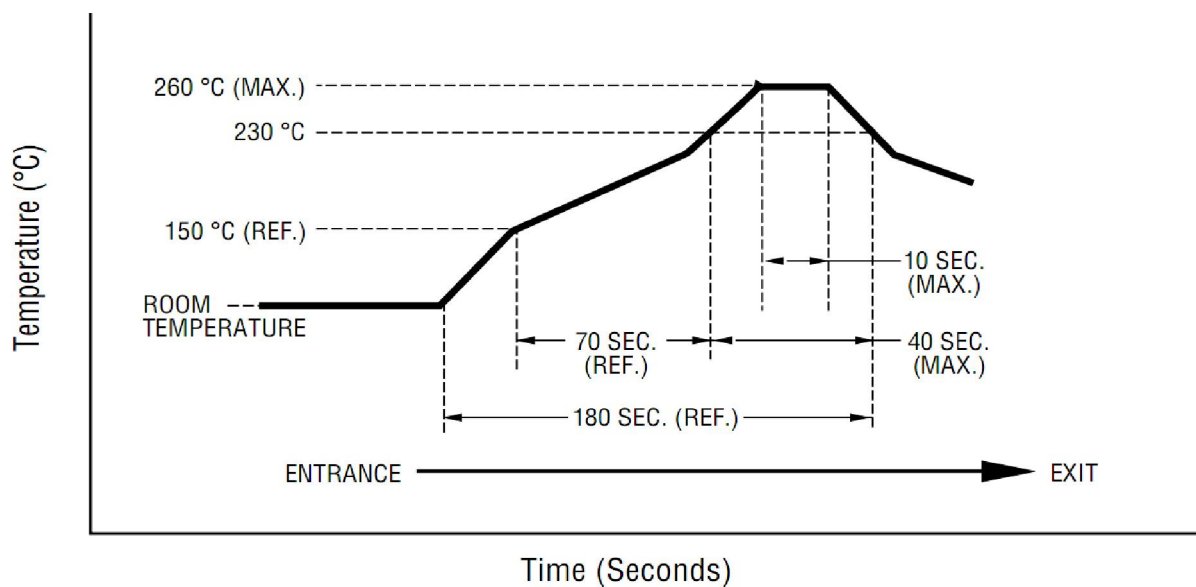

Revision	Description	Date
Rev1	Preliminary	2023/10/28

All Use For RF & Microwave