

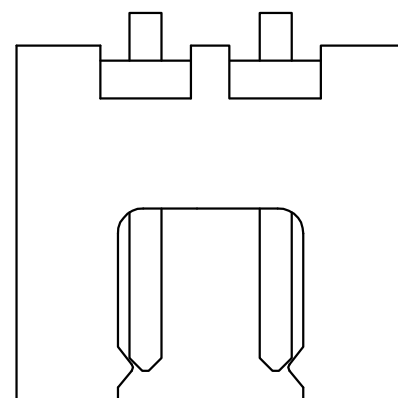


Pin	DIM A	DIM B
2	7.50	0.00
3	10.00	2.50
4	12.50	5.00
5	15.00	7.50
6	17.50	10.00
7	20.00	12.50
8	22.50	15.00
9	25.00	17.50
10	27.50	20.00
11	30.00	22.50
12	32.50	25.00
13	35.00	27.50
14	37.50	30.00
15	40.00	32.50
16	42.50	35.00

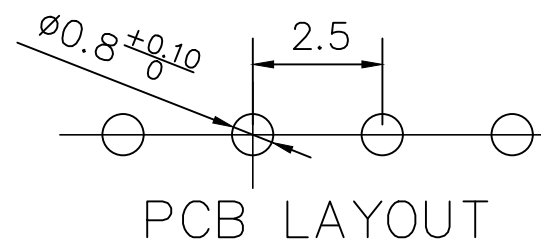


Technical drawing of a mechanical part. The drawing shows a cross-section of a component with a vertical wall on the left and a horizontal top surface. The vertical wall has a thickness dimensioned as 0.63 ± 0.05 . The horizontal top surface has a width dimensioned as 3.5 ± 0.2 . The part features a rounded top edge and a vertical step on the right side.

适应基板厚度：1.2mm~1.6mm
温度范围：-25℃~85℃
额定电压：250V AC/DC
额定电流：3A
接触电阻：≤0.01Ω
绝缘电阻：≥1000MΩ
耐压：1000V AC/minute

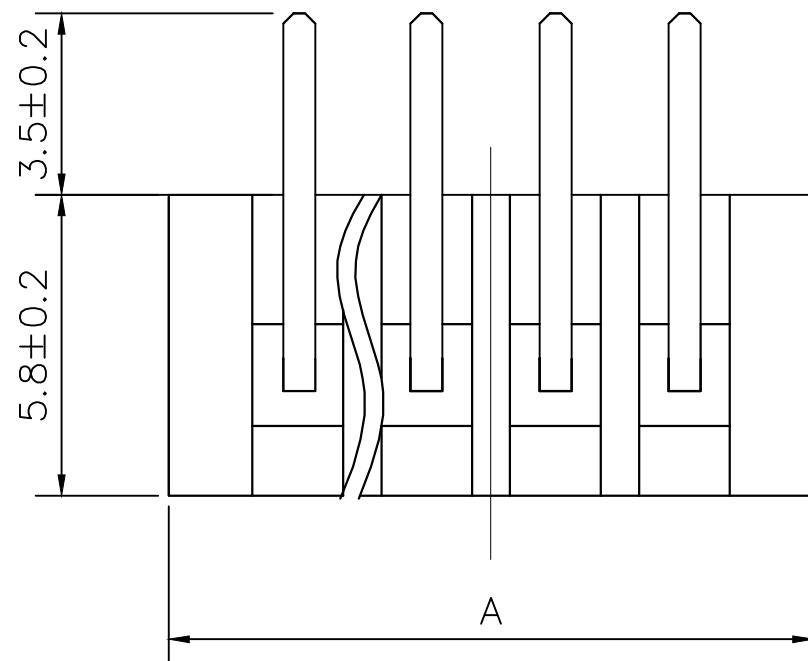

2	插针	铜	镀锡	
1	基座	PA66	米色	
序 号	品 名	材 质	电镀/颜色	备 注

		深圳市虹成电子有限公司		品 名 TITLE	针 座	
				料 号 PART NO	HCZZ0139-14	
GENERAL TOLERANCES (UNLESS SPECIFIED)		比 例 SCALE	1 : 1			
X.X ±0.35	X.* ±3.00*	单 位 UNIT	MM	制 图 DRAW	AhYe	
X.XX ±0.25	X.* ±2.00*	张 数 PART NO	1 OF 1	审 核 CHECKED	夏操云	
X.XXX ±0.15	X.XX* ±1.00*	版 本 REV	A	批 准 APPROVE	赵亮亮	