


G

Current Rating: 3 Amps
Withstanding Voltage: AC 1000V
Insulation Resistance: 1000M Ω Min
Contact Resistance: 20m Ω Max
Operation Temperature: -40°to+105°
Insulator Material: Polyester
Contact Material: Brass
Standard: PA6T
Contact Plating: Gold Flash
Max. Processing Temp: 200°C for 30-60 seconds
(255°C for 5 seconds)

Technical drawing of a 5-hole plate. The plate has a width of 2.54 and a length of A. The holes are arranged in a row with a center-to-center distance of 1.02 between adjacent holes. The drawing shows the top view of the plate with dimension lines and labels.

2	接触	铜	镀金	
1	基座	PA6T	本色	
序 号	品 名	材 质	电镀/颜色	备 注

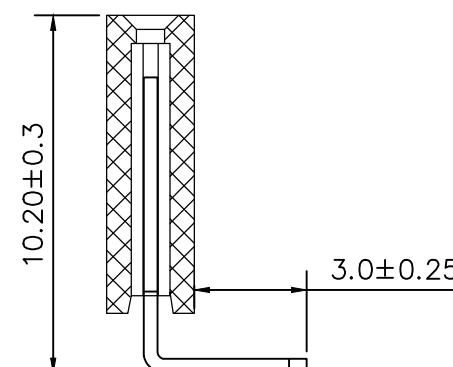