

1163797

https://www.phoenixcontact.com/us/products/1163797

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



SPE PCB connector, design: IEC 63171-2, degree of protection: IP20, number of positions: 2, 1 Gbps, CAT B (ISO/IEC 63171), material: Metal, connection method: THR solder connection, cable outlet: straight, Single Pair Ethernet

Your advantages

- · Compact design for maximum space savings
- · Connectors in accordance with IEC 63171-2
- · THR solderable
- · Robust industrial design
- · 360° shielding
- Data transmission up to 600 MHz

Commercial data

Item number	1163797
Packing unit	100 pc
Minimum order quantity	100 pc
Sales key	AB13
Product key	ABNBDA
GTIN	4063151175979
Weight per piece (including packing)	4.14 g
Weight per piece (excluding packing)	3.96 g
Customs tariff number	85366930
Country of origin	DE



1163797

https://www.phoenixcontact.com/us/products/1163797

Technical data

Product properties

Product type	Data connector (device side)
Туре	SPE
Sensor type	Single Pair Ethernet
Number of positions	2
Connection profile	SPE
Type of packaging	Tape and Reel
Pitch	7.62 mm
Number of slots	1
Туре	Socket
Shielded	yes
Cable outlet	straight

Insulation characteristics

Overvoltage category	II
Degree of pollution	2

Electrical properties

Rated voltage (III/2)	72 V DC
Rated surge voltage	2250 V DC
Rated surge voltage (III/2)	1500 V
Rated current	4 A
Frequency range	600 MHz
Insulation resistance	> 1 TΩ
Transmission medium	Copper
Transmission characteristics (category)	CAT B (IEC 63171)
Transmission speed	1 Gbps
Power transmission	PoDL

Connection data

Connection technology

Connection method	THR solder connection

Dimensions

Width	5 mm
Height	8.35 mm
Length	14.2 mm

Material specifications

Flammability rating according to UL 94	V0
Housing material	Metal
Contact material	Copper alloy



1163797

https://www.phoenixcontact.com/us/products/1163797


Contact surface material	Ni/Au
Contact carrier material	LCP
able/line	
Test voltage Core/Core	1000 V DC
Test voltage Core/Shield	2250.00 V DC
Halogen-free	yes
Resistance to oil	yes
Flame resistance	UL 94 V0
echanical properties	
Mechanical data	
Insertion/withdrawal cycles	≥ 750
Innertian force per signal contact	< 1.50 N
Insertion force per signal contact	1.5014
Extraction force per signal contact	< 1.5 N
Extraction force per signal contact nvironmental and real-life conditions Ambient conditions	< 1.5 N
Extraction force per signal contact	< 1.5 N
Extraction force per signal contact nvironmental and real-life conditions Ambient conditions	< 1.5 N
Extraction force per signal contact nvironmental and real-life conditions Ambient conditions Degree of protection	< 1.5 N IP20 IP20
Extraction force per signal contact nvironmental and real-life conditions Ambient conditions Degree of protection Ambient temperature (operation)	< 1.5 N IP20 IP20 -40 °C 85 °C
Extraction force per signal contact nvironmental and real-life conditions Ambient conditions Degree of protection Ambient temperature (operation) Ambient temperature (storage/transport)	< 1.5 N IP20 IP20 -40 °C 85 °C -40 °C 85 °C
Extraction force per signal contact nvironmental and real-life conditions Ambient conditions Degree of protection Ambient temperature (operation) Ambient temperature (storage/transport) Resistance to oil	< 1.5 N IP20 IP20 -40 °C 85 °C -40 °C 85 °C
Extraction force per signal contact nvironmental and real-life conditions Ambient conditions Degree of protection Ambient temperature (operation) Ambient temperature (storage/transport) Resistance to oil andards and regulations	IP20 IP20 IP20 -40 °C 85 °C -40 °C 85 °C yes
Extraction force per signal contact nvironmental and real-life conditions Ambient conditions Degree of protection Ambient temperature (operation) Ambient temperature (storage/transport) Resistance to oil andards and regulations Flame resistance	IP20 IP20 IP20 -40 °C 85 °C -40 °C 85 °C yes UL 94 V0
Extraction force per signal contact nvironmental and real-life conditions Ambient conditions Degree of protection Ambient temperature (operation) Ambient temperature (storage/transport) Resistance to oil andards and regulations Flame resistance Resistance to oil	IP20 IP20 IP20 -40 °C 85 °C -40 °C 85 °C yes UL 94 V0
Extraction force per signal contact nvironmental and real-life conditions Ambient conditions Degree of protection Ambient temperature (operation) Ambient temperature (storage/transport) Resistance to oil andards and regulations Flame resistance Resistance to oil	IP20 IP20 -40 °C 85 °C -40 °C 85 °C yes UL 94 V0 yes



1163797

https://www.phoenixcontact.com/us/products/1163797

Drawings

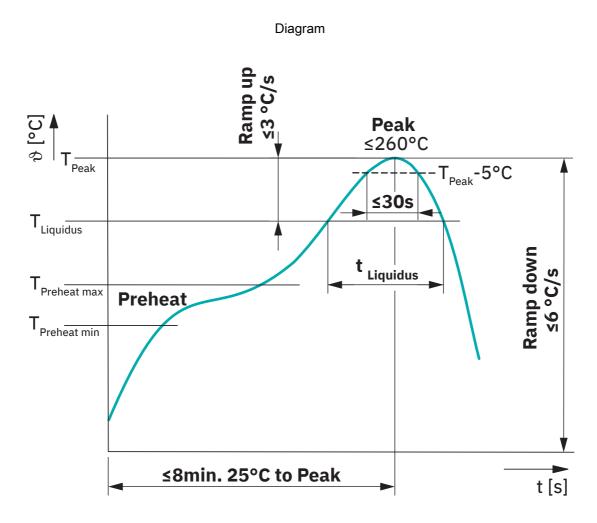

Classification reflow soldering profile



1163797

https://www.phoenixcontact.com/us/products/1163797

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1163797

c 911 us	cULus Recognized Approval ID: E335024-20220331				
		Nominal voltage U_N	Nominal current I _N	Cross section AWG	Cross section mm ²
		60 V	1.4 A	-	-



1163797

https://www.phoenixcontact.com/us/products/1163797

Classifications

UNSPSC 21.0

ECLASS

27440390
27460201
27440390
EC002637

39121400



1163797

https://www.phoenixcontact.com/us/products/1163797

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com