

UPF25B10RV

✓ ACTIVE

Holsworthy | Holsworthy UPF

TE Internal #: 2176162-4

Through-Hole Precision Resistor, Metal Film, .25 W, 10 ohm, .1 %, ±5 ppm/°C, Axial-Leaded, Copper Termination, 7 x 2.7 mm, Bulk, Holsworthy UPF

[View on TE.com >](#)



Passive Components > Resistors > Through-Hole Resistors



Resistor Type: Precision Resistor

Element Type: Metal Film

Power Rating: .25 W

Resistance Class: Up to 1kΩ

Resistance Value: 10 Ω

Features

Usage Conditions

Operating Temperature Range	-55 – 125 °C
Temperature Coefficient	±5 ppm/°C

Electrical Characteristics

Operating Voltage	250 V
Power Rating	.25 W
Resistance Class	Up to 1kΩ
Resistance Value	10 Ω
Passive Component Tolerance	.1 %

Product Type Features

Resistor Type	Precision Resistor
Element Type	Metal Film

Configuration Features

Number of Resistors	1
---------------------	---

Body Features

Lead Type	Axial-Leaded
-----------	--------------

Termination Features

Termination Area Base Material	Copper
--------------------------------	--------



Number of Terminations	2
------------------------	---

Dimensions

Passive Component Dimensions	7 x 2.7 mm
------------------------------	------------

Packaging Features

Packaging Method	Bulk
------------------	------

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

UPF25B10RV

Through-Hole Precision Resistor, Metal Film, .25 W, 10 ohm, .1 %, ±5 ppm/°C, Axial-Leaded, Copper Termination, 7 x 2.7 mm, Bulk, Holsworthy UPF





TE Part # 1-2176163-0
UPF50 0.1% 5PPM 250R



TE Part # 2176162-7
UPF25 0.1% 5PPM 250R



TE Part # 1-2176163-5
UPF50 0.1% 5PPM 500R



TE Part # 2176163-3
UPF50 0.1% 5PPM 10K




TE Part # 2176162-9
UPF25 0.1% 5PPM 50R

Also in the Series | **Holsworthy UPF**



Through-Hole Resistors(27)


Customers Also Bought



TE Part #6609021-9
10VB1=F7128 S0



TE Part #2176163-1
UPF50 0.1% 5PPM 100K

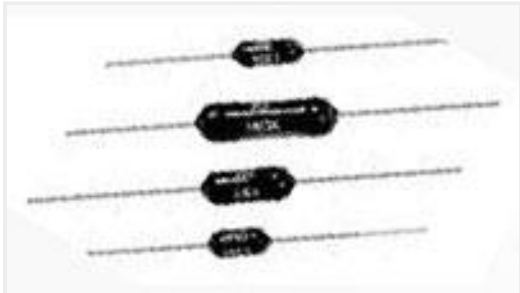

TE Part #9-1879664-5
H8 11K 0.1% 15PPM



TE Part #1624323-4
UPW50 0.1% 5PPM 10R



TE Part #8-1879026-6
YR1 0.1% 47R5



TE Part #6473418-2
SUPER SEAL 26POS CAP ASSY V AU



TE Part #K1160973
Power Relay 29-251-11-907



TE Part #K1165534
Limit Switch G13-C16-231-E

UPF25B10RV

Through-Hole Precision Resistor, Metal Film, .25 W, 10 ohm, .1 %, ±5 ppm/°C, Axial-Leaded, Copper Termination, 7 x 2.7 mm, Bulk, Holsworthy UPF



Documents

Product Drawings

UPF25 0.1% 5PPM 10R

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2176162-4_BA.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2176162-4_BA.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2176162-4_BA.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

High Precision Metal Film Leaded Resistor Type UPF Series

English