

1606306

https://www.phoenixcontact.com/us/products/1606306

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: UC, straight, shielded: yes, Screw locking mechanism, No. of pos. : 12, Direction of rotation: Standard, contact connection type: Pin, Crimp connection, cable diameter range: 2 mm ... 14.5 mm, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1242106

### Commercial data

Item number	1606306
Packing unit	20 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	AB31
Product key	ABRAIA
GTIN	4046356258708
Weight per piece (including packing)	87.06 g
Weight per piece (excluding packing)	87.06 g
Customs tariff number	85366990
Country of origin	DE



1606306

https://www.phoenixcontact.com/us/products/1606306

### Technical data

### Product properties

Product type	Circular connector (cable-side)
Froduct type	Circular connector (cable-side)

### Connector

#### Insulating body

Note	Order information: Order crimp contacts Ø 1 mm separately
Coding	N
Connection method	Crimp connection
Contact switching type	Pin
Application	Signal
Number of positions	12
Direction of rotation	Standard
Connection profile	12
Contact diameter Power contacts	1 mm
Rated current Power contacts	8 A
Rated voltage	48 V AC
	74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3

#### Housing

Housing material	Metal
Type of locking	Screw locking mechanism
Pg screw connection	none
Degree of protection (plugged in)	IP67
Thread type	M23

#### Seal

External cable diameter	2 mm 14.5 mm
Seal material	NBR

### Environmental and real-life conditions

#### Ambient conditions

Ambient temperature (storage/transport)	15 °C 25 °C
Permissible humidity (storage/transport)	50 % 65 %




https://www.phoenixcontact.com/us/products/1606306



# Drawings

Schematic diagram

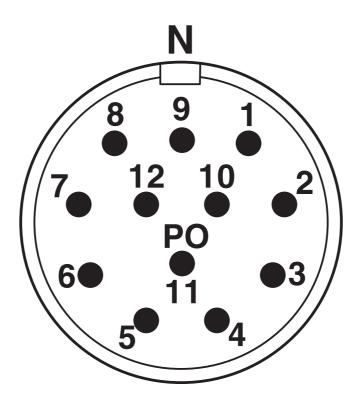

Connector pin assignment



1606306

https://www.phoenixcontact.com/us/products/1606306

## Classifications

UNSPSC 21.0

### **ECLASS**

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116
ETIM	
ETIM 9.0	EC002635
UNSPSC	

39121400



1606306

https://www.phoenixcontact.com/us/products/1606306

## Environmental product compliance

#### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	196935a8-1d89-414d-88b5-3ca24123da31

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com