




CGS TE

TE Internal #: 5406436-1  
RJ45 Connector, Single Port, 1 x 1, Jack, Shielded, Cat 3, Standard -  
Latch Down, 8 Position, Standard Profile, Through Hole - Solder,  
CGS TE

[View on TE.com >](#)

Connectors > Modular Jacks & Plugs > RJ45 Connectors

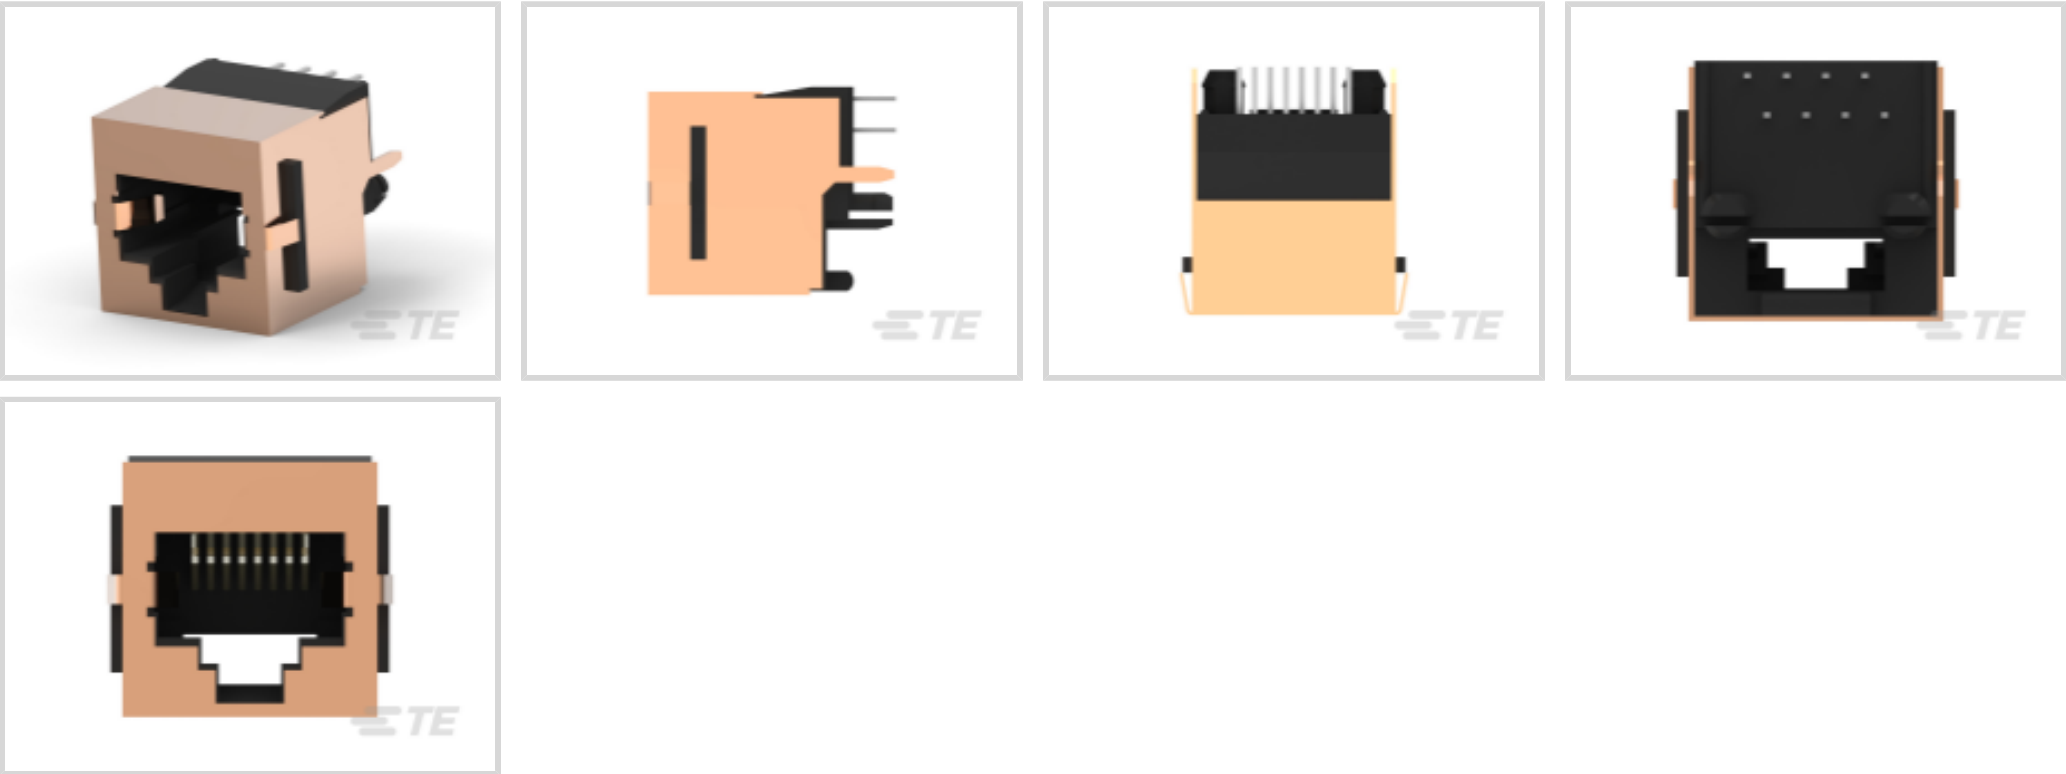

Modular Jack & Plug Interface Type: **RJ45**  
Port Configuration: **Single Port**  
Port Matrix Configuration: **1 x 1**  
Modular Jacks & Plugs Products: **RJ Type Jacks & Plugs**  
Connector Contact Density: **Standard**

Features

Packaging Features

Packaging Quantity	128
Packaging Method	Tray, Box & Tray

Dimensions

PCB Thickness (Recommended)	1.57 mm[.062 in]
Connector Height	16.64 mm[.655 in]

Mechanical Attachment

Panel Mount Feature	With
Panel Mount Feature Type	Panel Stops
Connector Mounting Type	Panel Mount

Contact Features

Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Current Rating (Max)	1.5 A, .2 A
Contact Mating Area Plating Material	Gold



Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material Thickness	1.27 µm[50 µin]

Body Features

Shield Plating Material	Tin
Shield Material	Copper Alloy
PCB Ground Tab Location	2.95 mm[.116 in]
Modular Jack Latch Orientation	Standard - Latch Down
Connector Profile	Standard

Industry Standards

UL Flammability Rating	UL 94V-0
Performance Category	Cat 3

Operation/Application

Indicator Type	No Indicator
Shielded	Yes
Circuit Application	Signal

Configuration Features

Number of PCB Ground Tabs	2
Port Configuration	Single Port
Port Matrix Configuration	1 x 1
Connector Contact Density	Standard
Number of Positions	8
Number of Loaded Positions	8
PCB Mount Orientation	Vertical

Product Type Features

Connector Product Type	Connector Assembly
Modular Jack & Plug Interface Type	RJ45
Modular Jacks & Plugs Products	RJ Type Jacks & Plugs
Modular Connector Style	Jack
Grounding Options	PCB and Panel Ground
Connector & Contact Terminates To	Printed Circuit Board

Termination Features

Termination Method to PCB	Through Hole - Solder
---------------------------	-----------------------



Termination Post & Tail Length	3.18 mm[.125 in]
--------------------------------	------------------

Housing Features

Mating Entry Location	Top
Centerline (Pitch)	1.02 mm[.04 in]
Housing Color	Black
Housing Material	PBT GF

Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
-----------------------------	---------------------------

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts

TE Part # 188729-1  
8P.COVER/SOLD.STOP

Also in the Series | CGS TE

Chassis Mount Resistors(667)

RJ11 Connectors(1)

RJ14 Connectors(4)

RJ22 Connectors(3)

RJ25 Connectors(4)

RJ45 Connectors(27)


Customers Also Bought

TE Part #229975-1  
ASSY,RCPT,50POS,B SLOT,BLK HSG

TE Part #5229911-1  
SCREW,PAN HD,"CHAMP PACKAGING

TE Part #1-1825027-4  
FSMRA5JH04=R/A,TACT PB SW,160G

TE Part #4-1393243-4  
RT424A05

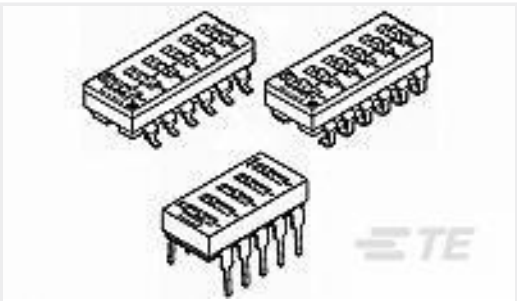


TE Part #1825360-3  
ADE04A04=4POS DIP SWITCH



TE Part #2-1623930-9  
CFR25 5% 1K0




TE Part #5749210-5  
50 50SR CABLE RCPT ASSY

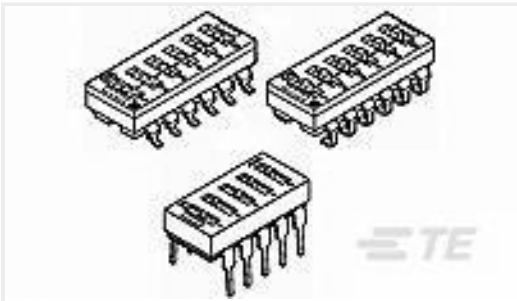

TE Part #1825360-5  
ADE08A04=8 POS DIP SWITCH



TE Part #YDTS26W19-35PNV001  
PLUG ASSY

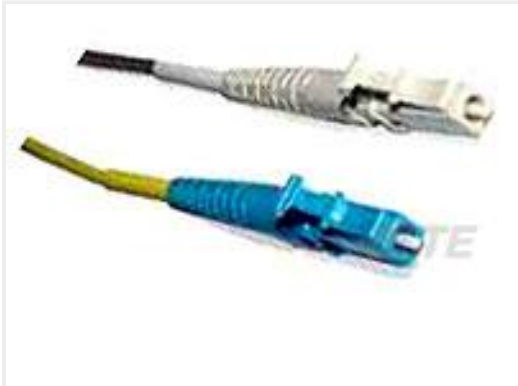

TE Part #6828129-1  
CO KIT, LC, MM, DUP TIGHT

Documents

Product Drawings

MJ,TE,8P,SHLD W/PNL STPS

English

CAD Files

3D PDF

English

Customer View Model

ENG\_CVM\_5406436-1\_B.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_5406436-1\_B.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_5406436-1\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English