# 5179029-6 ACTIVE

## Free Height

TE Internal #: 5179029-6

PCB Mount Header, Vertical, Board-to-Board, 140 Position, .8 mm [.

031 in] Centerline, Fully Shrouded, Gold, Surface Mount, Signal,

Free Height

View on TE.com >



Connectors > PCB Connectors > PCB Headers & Receptacles > Free Height Plug Connector: Board-Board, Vertical, 140, 0.8mm



PCB Connector Assembly Type: PCB Mount Header

PCB Mount Orientation: Vertical
Connector System: Board-to-Board

Number of Positions: 140

Centerline (Pitch): .8 mm [ .031 in ]

All Free Height Plug Connector: Board-Board, Vertical, 140, 0.8mm (18)

## **Features**

### **Electrical Characteristics**

| Operating Voltage                     | 100 VAC |
|---------------------------------------|---------|
| Insulation Resistance                 | 2 ΜΩ    |
| Dielectric Withstanding Voltage (Max) | 500 VAC |

### **Dimensions**

| Stack Height     | 18 mm, 6 mm, 10 mm, 14 mm[.551 in][.709 in][.236 in][.394 in] |
|------------------|---|
| Connector Height | 6 mm[.236 in]   |

## **Packaging Features**

|                    | .5 in     |
|--------------------|-----------|
| Packaging Quantity | 7         |
| Packaging Method   | Tube, Box |

## **Usage Conditions**



| Housing Temperature Rating                              | High                       |
|---|----------------------------|
| Operating Temperature Range                             | -40 – 125 °C[-40 – 257 °F] |
| Operation/Application                                   |                            |
| Assembly Process Feature                                | None                       |
| Circuit Application                                     | Signal                     |
| Mechanical Attachment                                   |                            |
| Mounting Alignment Feature Length                       | .5 mm[.02 in]              |
| Mating Alignment Type                                   | Polarization               |
| PCB Mount Alignment Type                                | Positioning Bosses         |
| PCB Mount Retention                                     | Without                    |
| PCB Mount Alignment                                     | With                       |
| Connector Mounting Type                                 | Board Mount                |
| Mating Alignment  | With                       |
| Termination Features                                    |                            |
| Rectangular Termination Post & Tail Width               | .25 mm[.01 in]             |
| Rectangular Termination Post & Tail Thickness           | .2 mm[.008 in]             |
| Termination Method to PCB                               | Surface Mount              |
| Contact Features  |                            |
| PCB Contact Termination Area Plating Material Finish    | Matte                      |
| Contact Mating Area Plating Material Thickness          | .2 μm[8 μin]               |
| Mating Tab Width  | .4 mm[.016 in]             |
| PCB Contact Termination Area Plating Material Thickness | 2 μm[78.74 μin]            |
| Contact Layout  | Inline                     |
| Contact Base Material                                   | Brass                      |
| Mating Tab Thickness                                    | .2 mm[.008 in]             |
| PCB Contact Termination Area Plating Material           | Tin                        |
| Contact Mating Area Plating Material Finish             | Matte                      |
| Contact Mating Area Plating Material                    | Gold                       |
| Contact Type  | Tab                        |
| Contact Current Rating (Max)                            | .5 A                       |
| Housing Features  |                            |
| Mating Entry Location                                   | Тор                        |
|   |                            |



| Housing Material                  | Matte                 |
|-----------------------------------|-----------------------|
| Centerline (Pitch)                | .8 mm[.031 in]        |
| Configuration Features            |                       |
| Board-to-Board Configuration      | Parallel              |
| Stackable                         | Yes                   |
| PCB Mount Orientation             | Vertical              |
| Number of Positions               | 140                   |
| Product Type Features             |                       |
| PCB Connector Assembly Type       | PCB Mount Header      |
| Connector System                  | Board-to-Board        |
| Header Type                       | Fully Shrouded        |
| Sealable                          | No                    |
| Connector & Contact Terminates To | Printed Circuit Board |
| Body Features                     |                       |
| Primary Product Color             | Natural               |
| Industry Standards                |                       |
| UL Flammability Rating            | UL 94V-0              |
| Other                             |                       |
| EU RoHS Compliance                | Compliant             |

## **Product Compliance**

EU ELV Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU                  | Compliant   |
|---|---|
| EU ELV Directive 2000/53/EC                   | Compliant   |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per<br>homogenous material. Also BFR/CFR/PVC<br>Free                                 |

Compliant



### Solder Process Capability

Reflow solder capable to 260°C


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## Compatible Parts



## Also in the Series | Free Height

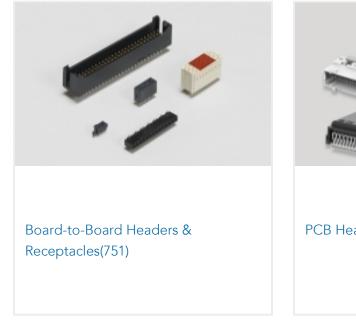



## **Customers Also Bought**























## **Documents**

## **Product Drawings**

0.8FH,P06H.5,140,08/Sn,TU

English

### **CAD Files**

**Customer View Model** 

ENG\_CVM\_CVM\_5179029-6\_B.2d\_dxf.zip

English

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_5179029-6\_B.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_5179029-6\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

## Datasheets & Catalog Pages

Fine Pitch Stacking Connectors - 0.8mm Free Height (FH) Connectors

English

## **Product Specifications**

**Product Specification** 

English

**Product Specification** 

English

PCB Mount Header, Vertical, Board-to-Board, 140 Position, .8 mm [.031 in] Centerline, Fully Shrouded, Gold, Surface Mount, Signal, Free Height

