



Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Assembly Type: **PCB Mount Header**

PCB Mount Orientation: **Vertical**

Connector System: **Wire-to-Board**

Number of Positions: **5**

Number of Rows: **1**

Features

Electrical Characteristics

Operating Voltage	250 VDC
-------------------	---------

Dimensions

Connector Width	8.6 mm[.339 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]
Connector Height	9.4 mm[.37 in]
Connector Length	19.8 mm[.78 in]

Packaging Features

Packaging Quantity	1000
Packaging Method	Bag

Industry Standards

Glow Wire Rating	GWT 750°C (Without Flame)
UL Flammability Rating	UL 94V-0

Usage Conditions

--	--



Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]

Mechanical Attachment

Mating Retention Type	Locking Tab
Mating Retention	With
PCB Mount Retention	Without
PCB Mount Alignment	Without
Connector Mounting Type	Board Mount
Mating Alignment	Without

Termination Features

Termination Post & Tail Length	3.69 mm[.145 in]
Termination Method to PCB	Through Hole - Solder

Contact Features

Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1 µm[39.37 µin]
Contact Size	1.14mm
Contact Mating Area Plating Material Thickness	3.04 µm[120 µin]
PCB Contact Termination Area Plating Material Thickness	3.04 µm[120 µin]
Contact Shape & Form	Square
Contact Layout	Inline
Contact Mating Area Length	7.7 mm[.303 in]
Contact Base Material	Brass
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Tin
Contact Type	Tab
Contact Current Rating (Max)	8 A

Housing Features

Housing Material	Nylon
Centerline (Pitch)	3.96 mm[.156 in]

Configuration Features

Number of Loaded Positions	5
Number of Power Positions	5



PCB Mount Orientation	Vertical
Number of Positions	5
Number of Rows	1

Product Type Features

Connector Shape	Rectangular
PCB Connector Assembly Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Partially Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Body Features

Primary Product Color	Natural
-----------------------	---------

Operation/Application

Circuit Application	Power
---------------------	-------

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 260°C







Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent




chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

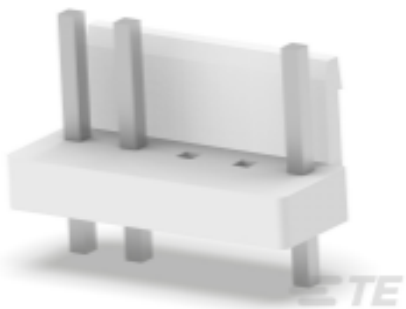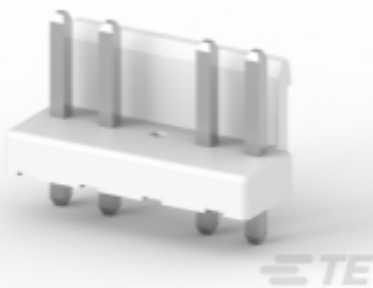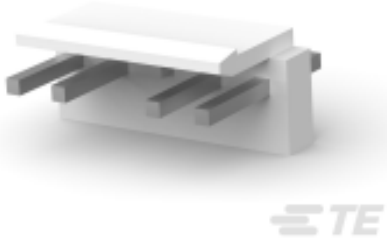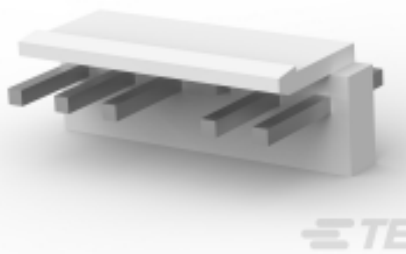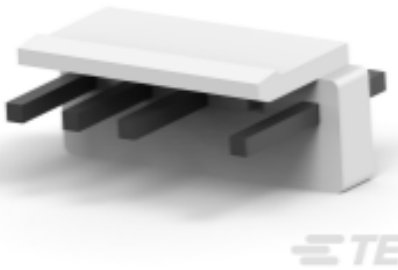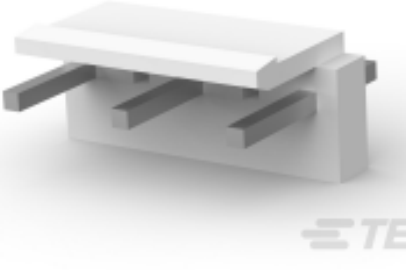 TE Part # 1-1744524-5 EP 05P HEADER ASY NO 3,4 PINS	 TE Part # 1744416-5 5 POS EP II HSG, GLOW WIRE	 TE Part # 4-1744524-5 EP 05P HEADER ASY NO #3 PIN	 TE Part # 4-1744524-3 3.96 EP HDR ASY 03P ,NO 2 PIN, GW
 TE Part # 1744291-1 EP HDR ASSY 5P W/PEG,NAT,W/0#3	 TE Part # 1744524-6 EP 06P HEADER ASY NO 4 PIN	 TE Part # 1744495-5 05P EP-II HOUSING, GREEN	 TE Part # 3-1744524-5 EP 05P HEADER ASY NO #4 PIN
 TE Part # 1744544-5 EP II TPA 05P, BLACK	 TE Part # 1744524-5 EP 05P HEADER ASY NO 2,4 PINS	 TE Part # 2-1744524-5 EP 05P HEADER ASY NO 2,3,4 PIN	

Also in the Series | Economy Power

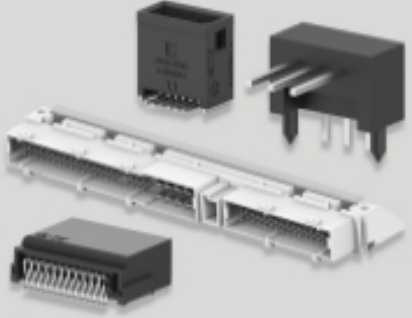
 Connector Contacts(15)	 Connector Hardware(2)	 Insertion & Extraction Tools(1)	 PCB Headers & Receptacles(402)
---	--	--	---



Power Contacts(9)




Rectangular Power Connectors(57)

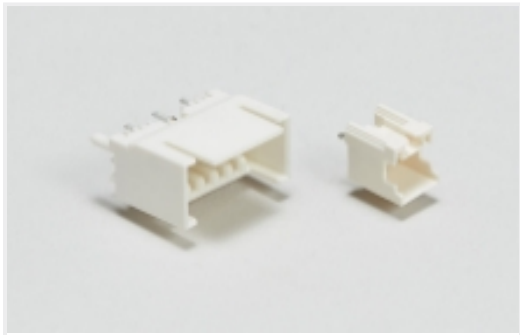


Wire-to-Board Headers & Receptacles (402)

Customers Also Bought

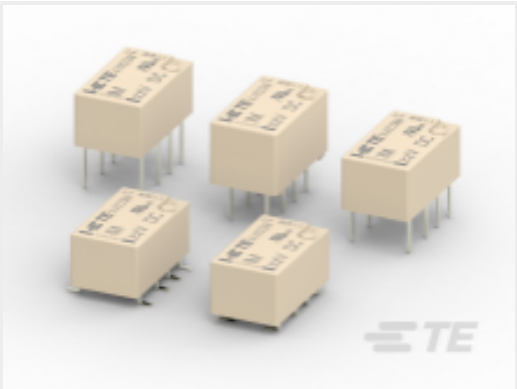


TE Part #CAT-AX41-IM11B
Standard Signal Relay 2 Form C,2 CO
Cont

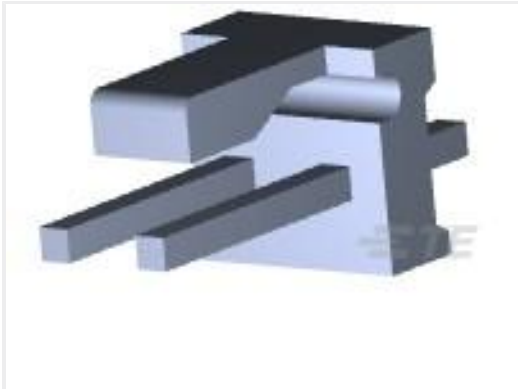

TE Part #640445-2
02P MTA156 HDR ASSY FL/STR SN



TE Part #1658623-8
34 NOVO MIL 30DP, LEAD FREE

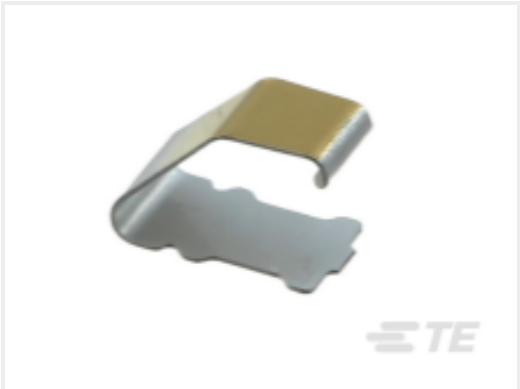


TE Part #1734300-1
SHIELD FINGER 3025-Z1-T




TE Part #2-2040832-1
EMBOSS TAPING 0.25FPC BF-L-1.3




TE Part #2301997-7
RJ45 JACK INT.MAG. 1GB LED 2X1

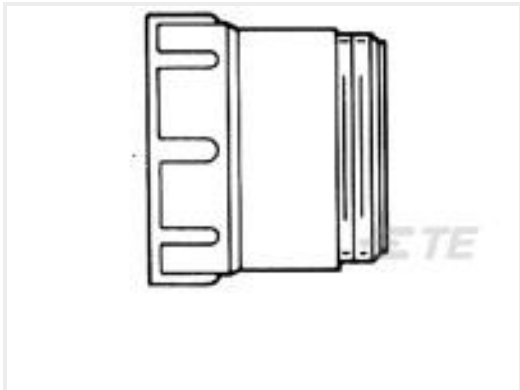

TE Part #207055-1
EXTENDER BACK SHELL



TE Part #1462041-6
IMB06CTS=IM RELAY 140mW12V HDV

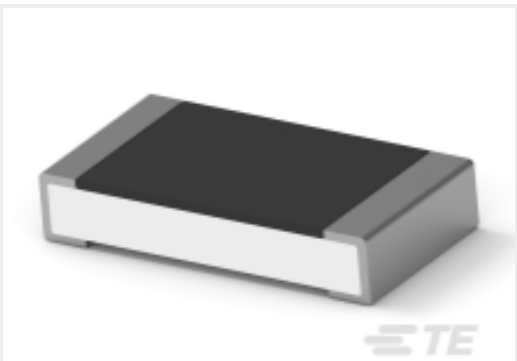

TE Part #1-2176391-7
RQ 1206 18K2 0.1% 10PPM 5K RL

Documents

Product Drawings

3.96 EP HDR ASY 05P NO PEG, GW

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1744489-5_D.2d_dxf.zip

1744489-5

PCB Mount Header, Vertical, Wire-to-Board, 5 Position, 3.96 mm [.156 in] Centerline, Partially Shrouded, Tin, Through Hole - Solder, Economy Power



English

Customer View Model

[ENG_CVM_CVM_1744489-5_D.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1744489-5_D.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Economy Power II \(EP II\) Glow Wire test compliant connectors](#)

English

[1-1773885-9 Economy Power Connectors](#)

English

Product Specifications

[Application Specification](#)

Japanese

[Application Specification](#)

English