

CA-16S1N129008 - Coupler connector



1620028

<https://www.phoenixcontact.com/us/products/1620028>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Coupler connector, series: CA, straight, shielded: yes, for standard and SPEEDCON interlock, No. of pos.: 16, Direction of rotation: Standard, contact connection type: Socket, Solder connection, cable diameter range: 10 mm ... 14.5 mm, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1243966

Your advantages

- Safe use in the field, thanks to high degree of protection
- Connector for flexible on-site assembly
- Consistent EMC protection for reliable transmission of signals
- Solder connection: proven connection technology for various litz wires

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 1620028 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | AB31 |
| Product key | ABRAEG |
| GTIN | 4046356819671 |
| Weight per piece (including packing) | 92.5 g |
| Weight per piece (excluding packing) | 92.5 g |
| Customs tariff number | 85366990 |
| Country of origin | DE |

CA-16S1N129008 - Coupler connector



1620028

<https://www.phoenixcontact.com/us/products/1620028>

Technical data

Product properties

| | |
|--------------|---------------------------------|
| Product type | Circular connector (cable-side) |
|--------------|---------------------------------|

Connector

Connection 1

| | |
|-------------|--------|
| Head design | Socket |
|-------------|--------|

Insulating body

| | |
|------------------------------------|--------------------|
| Coding | N |
| Insulation body material | PBT |
| Contact material | CuZn |
| Contact surface material | Ni/Au |
| Insertion/withdrawal cycles | 100 |
| Connection method | Solder connection |
| Contact switching type | Socket |
| Application | Signal |
| Number of positions | 16 |
| Direction of rotation | Standard |
| Connection profile | 16 |
| Rated voltage | 48 V AC 74 V DC |
| Rated surge voltage | 1.5 kV |
| Overvoltage category | III |
| Degree of pollution | 3 |
| Contact diameter | 1 mm |
| Litz wire cross-section | 1 mm ² |
| Nominal current per signal contact | 8 A |

Signal contacts

Signal contacts max.

Housing

| | |
|-----------------------------------|--|
| Housing material | Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn) |
| Type of locking | for standard and SPEEDCON interlock |
| Pg screw connection | none |
| Degree of protection (plugged in) | IP67 |
| Thread type | M23 |

Seal

| | |
|-------------------------|-------------------|
| External cable diameter | 10 mm ... 14.5 mm |
| Seal material | NBR |

Environmental and real-life conditions

CA-16S1N129008 - Coupler connector



1620028

<https://www.phoenixcontact.com/us/products/1620028>

Ambient conditions

| | |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 125 °C |
|---------------------------------|-------------------|

CA-16S1N129008 - Coupler connector


1620028

<https://www.phoenixcontact.com/us/products/1620028>



Drawings

Schematic diagram

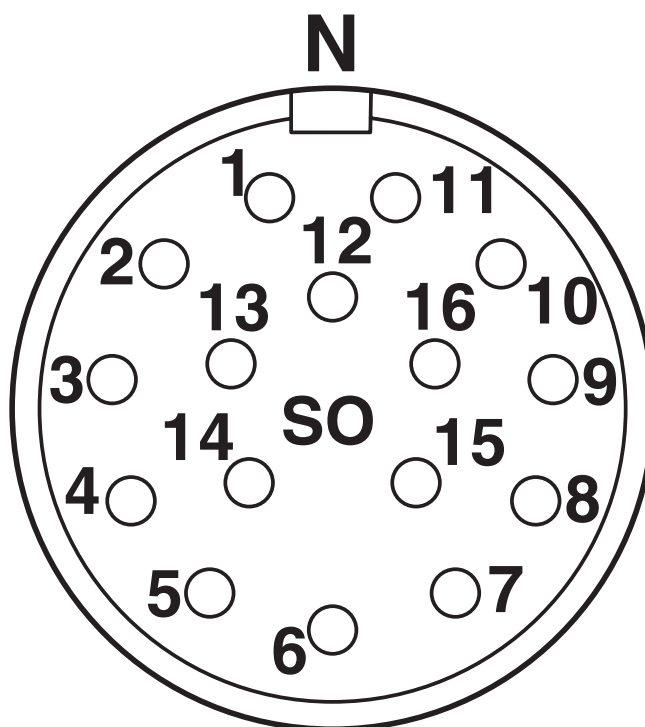

Connector pin assignment

CA-16S1N129008 - Coupler connector



1620028

<https://www.phoenixcontact.com/us/products/1620028>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1620028>

| cUL Recognized Approval ID: E335019-20141210 | | | | |
|---|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | 48 V | 5 A | 18 - 18 | - |

| UL Recognized Approval ID: E335019-20141210 | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| | 48 V | 8 A | 18 - 18 | - |

| cULus Recognized | | | | |
|------------------|--|--|--|--|
|------------------|--|--|--|--|

CA-16S1N129008 - Coupler connector



1620028

<https://www.phoenixcontact.com/us/products/1620028>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27440102 |
| ECLASS-12.0 | 27440116 |
| ECLASS-13.0 | 27440116 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC002635 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

CA-16S1N129008 - Coupler connector



1620028

<https://www.phoenixcontact.com/us/products/1620028>

Environmental product compliance

EU RoHS

| | |
|---|------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 6(c) |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | b52afd3c-acbd-4977-b3fa-50eeebfc485c |

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com