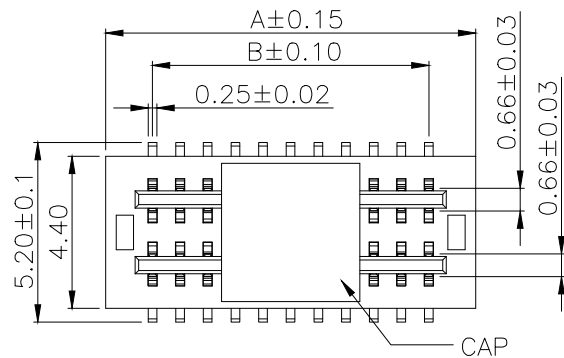


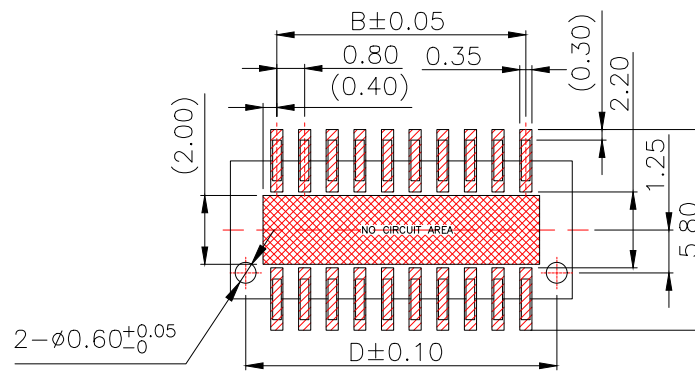
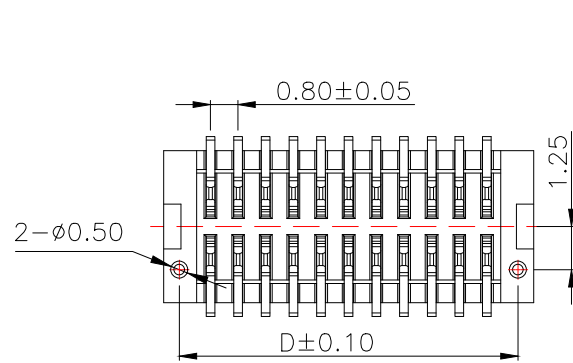
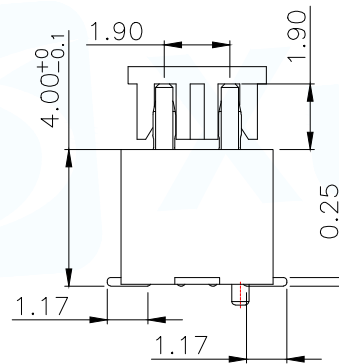
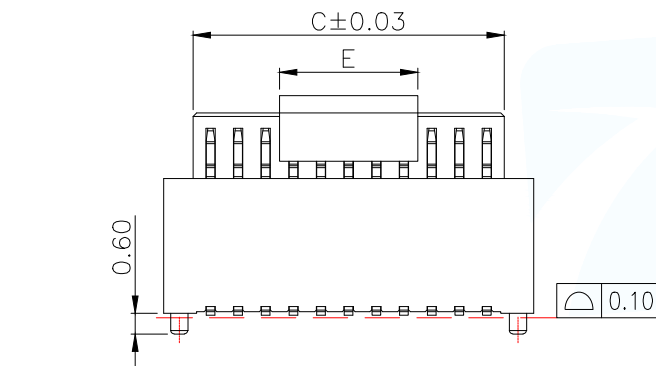
NOTES:

1.HUOSING:PA9T HIGH-TEMP THERMOPLASTIC UL94V-0

2.TERMINAL:PHOSPHOR BRONZE
PLATING:1μ" GOLD FLASH OVERALL
50~100μ' NICKEL UNDER PLATED

PIN	DIM A	DIM B	DIM C	DIM D	DIM E	PIN	DIM A	DIM B	DIM C	DIM D	DIM E
BTB0.875-4PLBSC-G71	3.5	0.8	1.8	2.6	4.0	BTB0.875-4PLBSC-G71	23.5	20.8	21.8	22.6	8.0
BTB0.875-6PLBSC-G71	4.3	1.6	2.6	3.4		BTB0.875-6PLBSC-G71	24.3	21.6	22.6	23.4	
BTB0.875-8PLBSC-G71	5.1	2.4	3.4	4.2		BTB0.875-8PLBSC-G71	25.1	22.4	23.4	24.2	
BTB0.875-10PLBSC-G71	5.9	3.2	4.2	5.0		BTB0.875-10PLBSC-G71	25.9	23.2	24.2	25.0	
BTB0.875-12PLBSC-G71	6.7	4.0	5.0	5.8		BTB0.875-12PLBSC-G71	26.7	24.0	25.0	25.8	
BTB0.875-14PLBSC-G71	7.5	4.8	5.8	6.6		BTB0.875-14PLBSC-G71	27.5	24.8	25.8	26.6	
BTB0.875-16PLBSC-G71	8.3	5.6	6.6	7.4	8.0	BTB0.875-16PLBSC-G71	28.3	25.6	26.6	27.4	8.0
BTB0.875-18PLBSC-G71	9.1	6.4	7.4	8.2		BTB0.875-18PLBSC-G71	29.1	26.4	27.4	28.2	
BTB0.875-20PLBSC-G71	9.9	7.2	8.2	9.0		BTB0.875-20PLBSC-G71	29.9	27.2	28.2	29.0	
BTB0.875-22PLBSC-G71	10.7	8.0	9.0	9.8		BTB0.875-22PLBSC-G71	30.7	28.0	29.0	29.8	
BTB0.875-24PLBSC-G71	11.5	8.8	9.8	10.6		BTB0.875-24PLBSC-G71	31.5	28.8	29.8	30.6	
BTB0.875-26PLBSC-G71	12.3	9.6	10.6	11.4		BTB0.875-26PLBSC-G71	32.3	29.6	30.6	31.4	
BTB0.875-28PLBSC-G71	13.1	10.4	11.4	12.2	8.0	BTB0.875-28PLBSC-G71	33.1	30.4	31.4	32.2	8.0
BTB0.875-30PLBSC-G71	13.9	11.2	12.2	13.0		BTB0.875-30PLBSC-G71	33.9	31.2	32.2	33.0	
BTB0.875-32PLBSC-G71	14.7	12.0	13.0	13.8		BTB0.875-32PLBSC-G71	34.7	32.0	33.0	33.8	
BTB0.875-34PLBSC-G71	15.5	12.8	13.8	14.6		BTB0.875-34PLBSC-G71	35.5	32.8	33.8	34.6	
BTB0.875-36PLBSC-G71	16.3	13.6	14.6	15.4		BTB0.875-36PLBSC-G71	36.3	33.6	34.6	35.4	
BTB0.875-38PLBSC-G71	17.1	14.4	15.4	16.2		BTB0.875-38PLBSC-G71	37.1	34.4	35.4	36.2	
BTB0.875-40PLBSC-G71	17.9	15.2	16.2	17.0	8.0	BTB0.875-40PLBSC-G71	37.9	35.2	36.2	37.0	8.0
BTB0.875-42PLBSC-G71	18.7	16.0	17.0	17.8		BTB0.875-42PLBSC-G71	38.7	36.0	37.0	37.8	
BTB0.875-44PLBSC-G71	19.5	16.8	17.8	18.6		BTB0.875-44PLBSC-G71	39.5	36.8	37.8	38.6	
BTB0.875-46PLBSC-G71	20.3	17.6	18.6	19.4		BTB0.875-46PLBSC-G71	40.3	37.6	38.6	39.4	
BTB0.875-48PLBSC-G71	21.1	18.4	19.4	20.2		BTB0.875-48PLBSC-G71	41.1	38.4	39.4	40.2	
BTB0.875-50PLBSC-G71	21.9	19.2	20.2	21.0		BTB0.875-50PLBSC-G71	41.9	39.2	40.2	41.0	

The product is high	MATING HEIGHT	PLUG (H.)	SOCKET (H.)
BTB0.870-XPLBSC-G71	7.00	4.00	3.00
BTB0.875-XPLBSC-G71	7.50	4.00	3.50
BTB0.880-XPLBSC-G71	8.00	4.00	4.00
BTB0.885-XPLBSC-G71	8.50	4.00	4.50

RECOMMENDED PCB PATTERN DIM.
TOLERANCE : ±0.05

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			
DECIMALS:	ANGLES:	TITLE: 0.8mm 双槽BTB PLUG	
.X±0.20	±2°	PAR	BTB0.875-XPLBSC-G71
.XX±0.10		DWN	
.XXX±0.05		CHKD	
		APVD	
		SCALE:1:1	UNIT:MM
		SIZE:A4	SHEET:1F1
		CUSTOMER COPY	REV:A