


Qty	Dept
1	DC
1	IE
1	ISO
1	PD
1	R&D
1	SD
1	QA
1	QC
1	QE

晨翔料号: DS1022-1x5RUF11-B

A vertical scale with labels A, B, C, D, E, F, G, and H. The scale is a vertical line with horizontal tick marks. The labels are placed to the right of the line. A horizontal line segment is drawn between the tick marks for D and E.

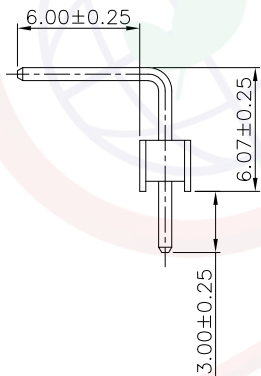

GENERAL TOLERANCE		ANGLE TOLERANCE		
X.	±0.60	X.	±5°	
.X	±0.38	.X	±3°	
.XX	±0.25	.XX	±2°	
DRAWING TYPE		CUSTOMER		
SCALE	1:1	SHEET	1 OF 1	
DRAWING NO.	C-DS1022-XXXXXX-A			

1. 电性说明:
 - 1.1 接触阻抗: 20毫欧最大
 - 1.2 耐压: 600伏交流电一分钟
 - 1.3 绝缘阻抗: 1000兆欧最小
 - 1.4 额定电流: 3安
2. 环境特性:
 - 2.1 工作温度: -40~+105° C
3. 材料:
 - 3.1 四方针: H62黄铜, 镍底镀金
 - 3.2 胶芯: PBT, 黑色, 阻燃

 晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD