



ALUMINUM ELECTROLYTIC CAPACITORS

规格书

SPECIFICATION

Customer name :

BERYL SERIES : SS

TYPE : SMD

DESCRIPTION : 22uF/16V Φ 5X5.4

Apply date : 2024-11-04

BERYL			CUSTOMER		
P/N:SS016M220TRE054			P/N:		
PREPARED	CHECKED	APPROVED	PREPARED	CHECKED	APPROVED
董桂茹	 廖梅君	成旭			

After approved, please sign back 1 Approval Sheet before order. If not, we will treat it as tacitly acknowledged and accepted our relative standard and technical index.

Zhao Qing Beryl Electronic Technology Co., Ltd.

TEL: (0758) 2862871 FAX: (0758) 2862870

E-mail: master@zq-beryl.com <http://www.zq-beryl.com>

NO.8 DUANZHOU ROAD, ZHAOQING CITY. GUANGDONG. CHINA



ALUMINUM ELECTROLYTIC CAPACITORS

Revise record

NO.	Date	Revise reason	Revise content	Prepared
01	2024.11.04	First issue	First issue	董桂茹



ALUMINUM ELECTROLYTIC CAPACITORS

1 、 Application

This specification applies to Aluminum electrolytic capacitor (foil type) used in electronic equipment.
Designed capacitor's quality meets IEC 60384.


2 、 Table of specification and characteristics

Series	Cap(uF) 120Hz/20℃	WV(V)	Size (mm)		Temperature (℃)	Capacitance Tolerance	Life(hours) @105(℃)	
			D	L				
SS	22	16	5	5.4	-40~+ 105	±20%	2000	
DF (%) (MAX) 120Hz/20℃		LC(μA) (MAX) 2min/20℃		ESR(Ω) (MAX) 100KHz/25℃		RC (mA rms) (MAX)105℃/120Hz		Surge voltage(V)
≤20		≤4		-		28		18

Other : /

3 、 Product Dimensions

Type(Φ4~Φ18)

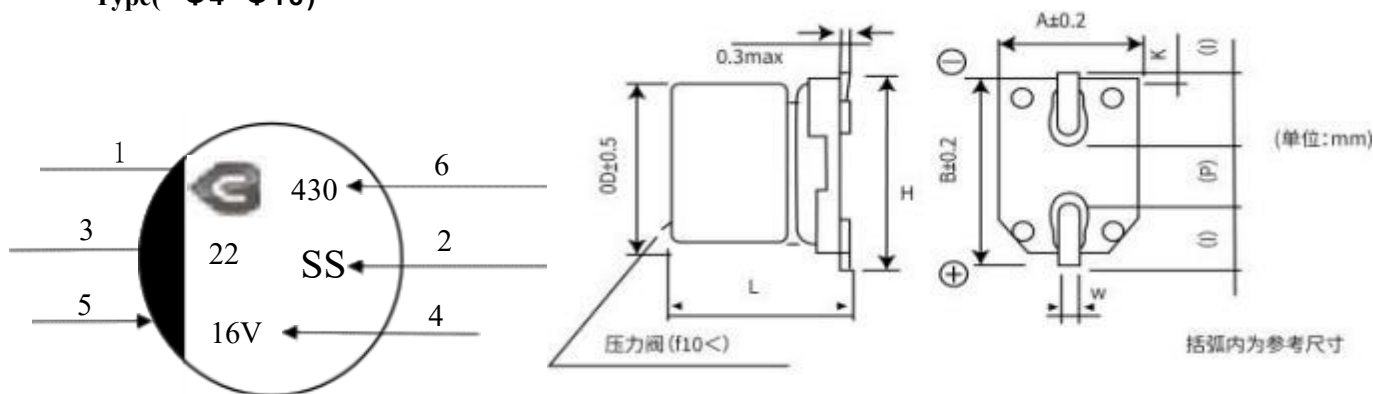

Dimensions					Unit: mm		
ΦD	L	A/B	H	I	W	P	K
4/D	5.4±0.5	4.3	5.5	1.8	0.5~0.8	1.0	0.35+0. 15/-0.20
5/E		5.3	6.5	2.1		1.3	
6.3/F		6.6	7.8	2.4		2.2	
8/H	10.5±0.5	8.3	10	3.4	0.8~ 1. 1	3.1	0.70±0.20
	12.5±0.5						
10/J	10.5±0.5	10.3	12	3.5		4.5	
	12.5±0.5						

4、Part Number

SS	016	M	220	TR	E054
----	-----	---	-----	----	------

Size: 5*5.4

PACKAGE TYPE: Reel


RATED CAPACITANCE: 220=22uF

CAPACITANCE TOLERANCE: M= $\pm 20\%$

RATED VOLTAGE: 016=16V

SERIES NAME

5、Frame drawing and materials

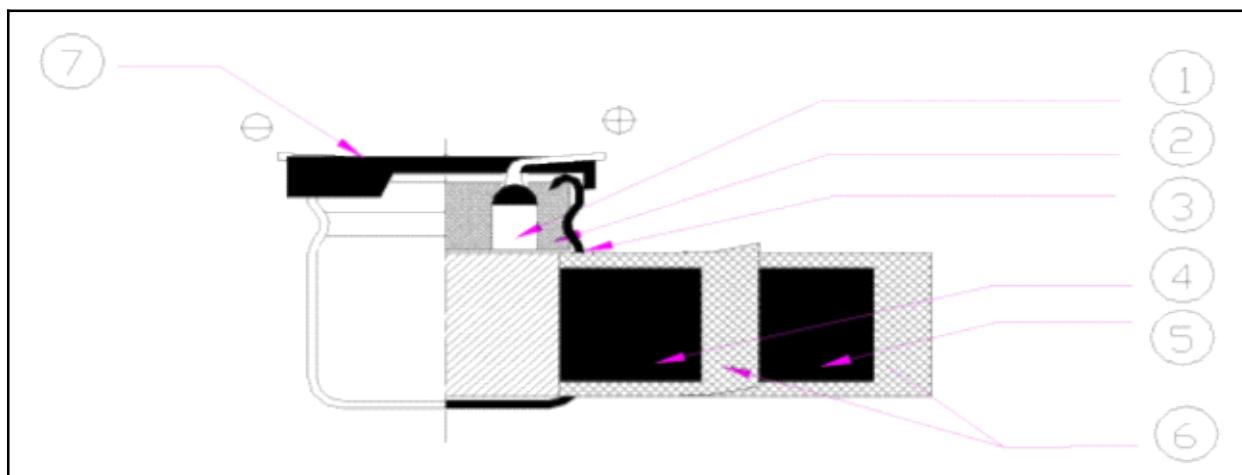




ALUMINUM ELECTROLYTIC CAPACITORS

No	Parts	Material	Main supply Factory
1	Lead wire	Aluminum- wire LG3+Tin- plating of copper cover steel	NANTONG GENENIC ELECTRONIC INDUSTRY CO., LTD
2	Rubber bung	IIR rubber	Tiantai Pengyu Rubber Co., Ltd. Zhejiang Tiantai Xianghe Industrial Co., Ltd
3	CASE	Aluminum - 99.5%	Shenzhen Xiesheng Precision Products Co., Ltd. Hangzhou Lin'an Yipeng Electronic Technology Co., Ltd
4	Anode foil(+)	Formed Aluminum 99.98% or 99.98%	Dongguang Sunshine Foil Co., Ltd. Lidon Electronic Technology Co., Ltd.
5	Cathode foil(-)	Etched Aluminum 99.7%	AFT ELECTRONIC CO. LTD. BOLUO
6	Separator paper	Electrolytic Capacitor paper	NKK NIPPON KODOSHI CORPORATION. Zhejiang Kane Special Paper CO., Ltd.
7	BASE	PPA	Hongxinde Electronic Technology Co. Ltd.

6、Product Marking

Marking Sample:

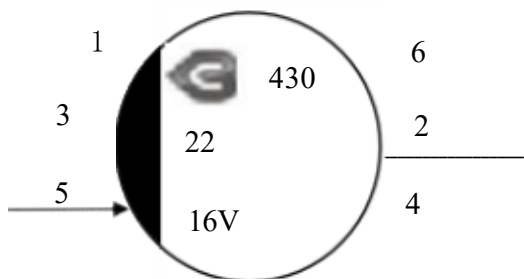

Marking Details:

Capacitor shall be marked the following items:

- 1) Trademark (BERYL)
- 2) Series symbol
- 3) Nominal capacitance(22uF)
- 4) working voltage(16V)
- 5) Cathode marked
- 6) Date code (430)

7、Characteristics

Standard atmospheric conditions

Unless other specified, the standard range of atmospheric conditions for making measurements and tests is as follows:

Ambient temperature : 15°C to 35°C

Relative humidity : 45% to 85%

Air pressure : 86kPa to 106kPa

If there is any doubt about the results, measurement shall be made within the following conditions:

Ambient temperature : 20°C ± 2°C


Relative humidity : 60% to 70%

Air pressure : 86kPa to 106kPa

Operating temperature range

The ambient temperature range at which the capacitor can be operated continuously at rated voltage is (4~120V) -40°C to +105°C.

Table

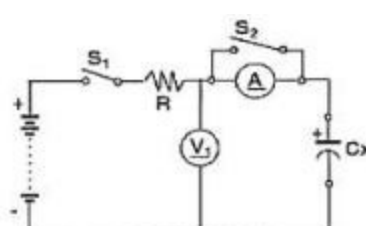ITEM		PERFORMANCE
1	Nominal capacitance (Tolerance)	<p>< Condition></p> <p>Measuring Frequency: 120 Hz ± 12 Hz</p> <p>Measuring circuit: Series equivalent circuit</p> <p>Measuring Voltage: Not more than 0.5 Vrms + 1.5 ~ 2.0 V.DC</p> <p>Measuring Temperature: 20 ± 2 °C</p> <p>< Criteria></p> <p>Shall be within the specified capacitance tolerance.</p>
2	Leakage current	<p><Condition></p> <p>Connecting the capacitor with a protective resistor (1kΩ ± 10Ω) in series for 2 minutes, and then, measure leakage current.</p> <p><Criteria></p> <p>I: Leakage current (μA)</p> <p>$I (\mu A) \leq 0.01CV$ or 3 (μA) whichever is greater, measurement circuit refer to right drawing.</p> <p>C: Capacitance (μF)</p> <p>V: Rated DC working voltage (V)</p> 
3	Dissipation factor	<p>< Condition></p> <p>Nominal capacitance, for measuring frequency, voltage and temperature.</p> <p>< Criteria></p> <p>Must be within the parameters (See page 3)</p>






ALUMINUM ELECTROLYTIC CAPACITORS

ITEM		PERFORMANCE																				
4	Impedance	<p>< Condition> Measuring frequency: 1 0 0 kHz; Measuring temperature: 2 0 ± 2 °C Measuring point : 2 mm max. from the surface of a sealing rubber on the lead wire.</p> <p>< Criteria> (25 °C) Must be within the parameters (See page 3)</p>																				
5	Load life test	<p>< Condition> According to IEC60384-4 No. 4. 13 methods, the capacitor is stored at a temperature of Maximum operating temperature ± 2 ° C with DC bias voltage plus the rated ripple current for Rated life +48/0 hours. (The sum of DC and ripple peak voltage shall not exceed the rated working voltage) Then the product should be tested after 16 hours recovering time at atmospheric conditions. The result should meet the following table:</p> <p>< Criteria> The characteristic shall meet the following requirements.</p> <table><tr><td>Leakage current</td><td colspan="3">Not more than the specified value.</td><td rowspan="4"></td></tr><tr><td>Capacitance Change</td><td colspan="3">Within ±20% of initial value.</td></tr><tr><td>Dissipation Factor</td><td colspan="3">Not more than 200% of the specified value.</td></tr><tr><td>Appearance</td><td colspan="3">There shall be no leakage of electrolyte.</td></tr></table>				Leakage current	Not more than the specified value.				Capacitance Change	Within ±20% of initial value.			Dissipation Factor	Not more than 200% of the specified value.			Appearance	There shall be no leakage of electrolyte.		
Leakage current	Not more than the specified value.																					
Capacitance Change	Within ±20% of initial value.																					
Dissipation Factor	Not more than 200% of the specified value.																					
Appearance	There shall be no leakage of electrolyte.																					
6	Shelf life test	<p>< Condition> The capacitors are then stored with no voltage applied at a temperature of Maximum operating temperature±2°C for1000+48/0 hours. Following this period, the capacitors shall be removed from the test chamber and be allowed to stabilized at room temperature for16 hours. measure leakage current</p> <p>< Criteria> The characteristic shall meet the following requirements.</p> <table><tr><td>Leakage current</td><td colspan="3">Not more than the specified value.</td><td rowspan="4"></td></tr><tr><td>Capacitance Change</td><td colspan="3">Within ± 2 0 % of initial value</td></tr><tr><td>Dissipation Factor</td><td colspan="3">Not more than 200% of the specified value.</td></tr><tr><td>Appearance</td><td colspan="3">There shall be no leakage of electrolyte.</td></tr></table>				Leakage current	Not more than the specified value.				Capacitance Change	Within ± 2 0 % of initial value			Dissipation Factor	Not more than 200% of the specified value.			Appearance	There shall be no leakage of electrolyte.		
Leakage current	Not more than the specified value.																					
Capacitance Change	Within ± 2 0 % of initial value																					
Dissipation Factor	Not more than 200% of the specified value.																					
Appearance	There shall be no leakage of electrolyte.																					
7	Maximum permissible (ripple current, temperature coefficient)	<p>< Condition> The maximum permissible ripple current is the maximum A. C current at 1 2 0 Hz and can be applied at maximum operating temperature Table- 3 The combined value of D. C voltage and the peak A. C voltage shall not exceed the rated voltage and shall not reverse voltage .</p> <p>Frequency Multipliers:</p> <table><tr><td>Freq (Hz)</td><td>50</td><td>120</td><td>300</td><td>1K</td><td>10K~100K</td></tr><tr><td>Correction Factor</td><td>0.70</td><td>1.00</td><td>1.17</td><td>1.36</td><td>1.50</td></tr></table>				Freq (Hz)	50	120	300	1K	10K~100K	Correction Factor	0.70	1.00	1.17	1.36	1.50					
Freq (Hz)	50	120	300	1K	10K~100K																	
Correction Factor	0.70	1.00	1.17	1.36	1.50																	

ITEM		PERFORMANCE														
8	Terminal strength	< Condition> Tensile strength of terminals Fixed the capacitor, applied force to the terminal in lead out direction for30+5-0 seconds. Bending strength of terminals. Fixed the capacitor, applied force to bent the terminal (1~4 mm from the rubber) for 90° within 2~3 seconds, and then bent it for 90° to its original position within 2~3 seconds.														
		Diameter of lead wire			Tensile force N (kgf)					Bending force N (kgf)						
		0.5mm and less			5 (0.51)					2.5 (0.25)						
		0.6~0.8 mm			10 (1.02)					5 (0.51)						
		< Criteria> No noticeable changes shall be found, no breakage or looseness at the terminal.														
9	Temperature characteristics	< Condition>														
		STEP		Testing temperature (°C)					Time							
		1		20±2					Time to reach thermal equilibrium							
		2		-40 -25±3					Time to reach thermal equilibrium							
		3		20±2					Time to reach thermal equilibrium							
		4		105±2					Time to reach thermal equilibrium							
		5		20±2					Time to reach thermal equilibrium							
		Capacitance, DF, and impedance shall be measured at 120 Hz.														
		< Criteria>														
		a. At +105°C , capacitance measured at +20°C shall be within ±25% of its original value. Dissipation factor shall be within the limit of Item 7 . 3 The leakage current measured shall not more than 10 times of its specified value.														
b. In step 5, capacitance measured at +20°C shall be within ± 10% of its original value. Dissipation factor shall be within the limit of Item 7 . 3 The leakage current shall not more than the specified value.																
c. At- 40 °C , Impedance (Z) ratio shall not exceed the value of the following table.																
		Voltage (V)		4	6.3	10	16	25	35	50	63	80	100	120		
		Z-25 C/ Z+20 C		7	4	3	2	2	2	2	2	2	2	2		
		Z-40 C/ Z+20 C		15	8	6	4	4	3	3	3	3	3	4		
10	Surge test	< Condition> Applied a surge voltage to the capacitor connected with a (100 ± 50) / CR (kΩ) resistor in series for 30±5 seconds in every 5±0.5 minutes at 15~35°C .Procedure shall be repeated 1000 times. Then the capacitors shall be left under normal humidity for 1-2 hours before measurement CR : Nominal Capacitance (μF)														
		< Criteria>														
		Leakage current		Not more than the specified value.												
		Capacitance Change		Within ± 15 % of initial value												
		Dissipation Factor		Not more than the specified value.												
		Appearance		There shall be no leakage of electrolyte												
Attention: This test simulates over voltage at abnormal situation only. It is not applicable to such over voltage as often applied.																


ITEM		PERFORMANCE																
11	Change of temperature test	<p>< Condition> Temperature cycle: According to IEC6 0 3 8 4 - 4 No. 4 . 7 methods, capacitor shall be placed in an oven, the condition according as below:</p> <table><tr><th>Temperature</th><th>Time</th></tr><tr><td>(1) +20°C</td><td>3 Minutes</td></tr><tr><td>(2) Rated low temperature (- 40°C)(-25°C)</td><td>30±2 Minutes</td></tr><tr><td>(3) Rated high temperature (+105°C)</td><td>30±2 Minutes</td></tr><tr><td colspan="2">(1) to (3) = 1 cycle, total 5 cycle</td></tr></table> <p>< Criteria> The characteristic shall meet the following requirement.</p> <table><tr><td>Leakage current</td><td>Not more than the specified value.</td></tr><tr><td>Dissipation Factor</td><td>Not more than the specified value.</td></tr><tr><td>Appearance</td><td>There shall be no leakage of electrolyte.</td></tr></table>	Temperature	Time	(1) +20°C	3 Minutes	(2) Rated low temperature (- 40°C)(-25°C)	30±2 Minutes	(3) Rated high temperature (+105°C)	30±2 Minutes	(1) to (3) = 1 cycle, total 5 cycle		Leakage current	Not more than the specified value.	Dissipation Factor	Not more than the specified value.	Appearance	There shall be no leakage of electrolyte.
Temperature	Time																	
(1) +20°C	3 Minutes																	
(2) Rated low temperature (- 40°C)(-25°C)	30±2 Minutes																	
(3) Rated high temperature (+105°C)	30±2 Minutes																	
(1) to (3) = 1 cycle, total 5 cycle																		
Leakage current	Not more than the specified value.																	
Dissipation Factor	Not more than the specified value.																	
Appearance	There shall be no leakage of electrolyte.																	
12	Damp heat test	<p>< Condition> Humidity test : According to IEC60384-4 No.4. 12 methods, capacitor shall be exposed for 500± 8 hours in an atmosphere of 90~95%R H .at 40±2 °C , the characteristic change shall meet the following requirement.</p> <p>< Criteria></p> <table><tr><td>Leakage current</td><td>Not more than the specified value.</td></tr><tr><td>Capacitance Change</td><td>Within ± 10% of initial value.</td></tr><tr><td>Dissipation Factor</td><td>Not more than 120% of the specified value.</td></tr><tr><td>Appearance</td><td>There shall be no leakage of electrolyte.</td></tr></table>	Leakage current	Not more than the specified value.	Capacitance Change	Within ± 10% of initial value.	Dissipation Factor	Not more than 120% of the specified value.	Appearance	There shall be no leakage of electrolyte.								
Leakage current	Not more than the specified value.																	
Capacitance Change	Within ± 10% of initial value.																	
Dissipation Factor	Not more than 120% of the specified value.																	
Appearance	There shall be no leakage of electrolyte.																	
13	Solderability test	<p>< Condition> The capacitor shall be tested under the following conditions: Soldering temperature : 245 ± 5oC Dipping depth : 2mm Dipping speed : 25±2.5mm/s Dipping time : 3±0.5s</p> <p><Criteria></p> <table><tr><td>Soldering wetting time</td><td>Less than 3s</td></tr><tr><td>Coating quality</td><td>A minimum of 95% of the surface being immersed</td></tr></table>	Soldering wetting time	Less than 3s	Coating quality	A minimum of 95% of the surface being immersed												
Soldering wetting time	Less than 3s																	
Coating quality	A minimum of 95% of the surface being immersed																	

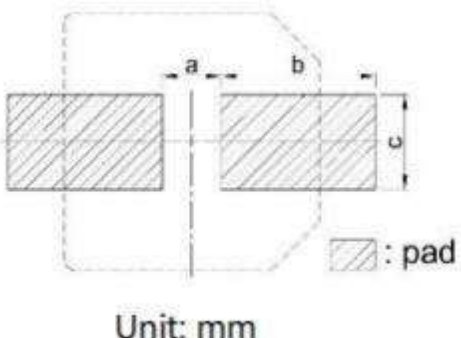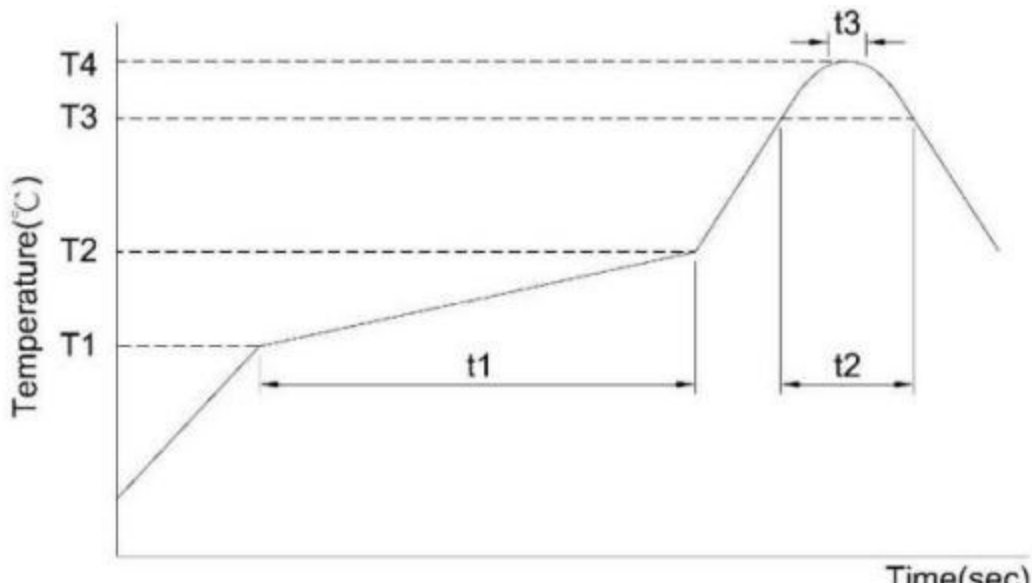ITEM		PERFORMANCE																																								
14	Reflow Conditions for SMD type	<p>Recommended pad pattern and size</p> <div></div> <table><tr><th>产品尺寸</th><th colspan="3">焊盘尺寸</th></tr><tr><th></th><th>a</th><th>b</th><th>c</th></tr><tr><td>4Φ</td><td>1.0</td><td>2.6</td><td>1.6</td></tr><tr><td>5Φ</td><td>1.4</td><td>3.0</td><td>1.6</td></tr><tr><td>6.3Φ</td><td>1.9</td><td>3.5</td><td>1.6</td></tr><tr><td>8Φ</td><td>3.0</td><td>4.5</td><td>2.5</td></tr><tr><td>10Φ</td><td>4.0</td><td>4.0</td><td>2.5</td></tr><tr><td>12.5Φ</td><td>4.0</td><td>6.0</td><td>3.2</td></tr><tr><td>16Φ</td><td>6.0</td><td>7.0</td><td>3.2</td></tr><tr><td>18Φ</td><td>6.0</td><td>8.0</td><td>3.2</td></tr></table>	产品尺寸	焊盘尺寸				a	b	c	4Φ	1.0	2.6	1.6	5Φ	1.4	3.0	1.6	6.3Φ	1.9	3.5	1.6	8Φ	3.0	4.5	2.5	10Φ	4.0	4.0	2.5	12.5Φ	4.0	6.0	3.2	16Φ	6.0	7.0	3.2	18Φ	6.0	8.0	3.2
		产品尺寸	焊盘尺寸																																							
	a	b	c																																							
4Φ	1.0	2.6	1.6																																							
5Φ	1.4	3.0	1.6																																							
6.3Φ	1.9	3.5	1.6																																							
8Φ	3.0	4.5	2.5																																							
10Φ	4.0	4.0	2.5																																							
12.5Φ	4.0	6.0	3.2																																							
16Φ	6.0	7.0	3.2																																							
18Φ	6.0	8.0	3.2																																							
		<p>Recommended Soldering Methods</p> <p>2. 1 Solder iron method: Bit temperature:$350 \pm 5^{\circ}\text{C}$, Application time of soldering Iron: $3 + 1/-0$ sec</p> <p>2.2 Reflow Soldering (Pb-free) :</p> <div></div>																																								

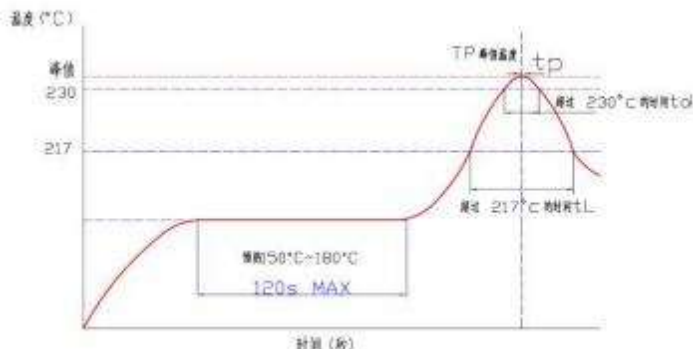ITEM		PERFORMANCE																																						
15	Vibration test	<p>< Condition></p> <p>The following conditions shall be applied for 2 hours in each 3 mutually perpendicular directions. Vibration frequency range : 10Hz ~ 55Hz each to peak amplitude : 1.5mm Sweep rate : 10Hz ~ 55Hz ~ 10Hz in about 1 minute Mounting method: The capacitor with diameter greater than 12.5mm or longer than 25mm must be fixed in place with a bracket.</p> <p>< Criteria></p> <p>After the test, the following items shall be tested :</p> <table><tr><td>Inner construction</td><td>No intermittent contacts, open or short circuiting. No damage of tab terminals or electrodes</td></tr><tr><td>Appearance</td><td>No mechanical damage in terminal. No leakage of electrolyte or swelling of the case. The markings shall be legible</td></tr></table>	Inner construction	No intermittent contacts, open or short circuiting. No damage of tab terminals or electrodes	Appearance	No mechanical damage in terminal. No leakage of electrolyte or swelling of the case. The markings shall be legible																																		
		Inner construction	No intermittent contacts, open or short circuiting. No damage of tab terminals or electrodes																																					
Appearance	No mechanical damage in terminal. No leakage of electrolyte or swelling of the case. The markings shall be legible																																							
16	Resistance to solder heat test	<p><Condition></p> <p>The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250 ° C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.</p> <p><Criteria></p> <table><tr><td>Leakage current</td><td>Not more than the specified value.</td></tr><tr><td>Capacitance Change</td><td>Within ± 10% of initial value.</td></tr><tr><td>Dissipation Factor</td><td>Not more than the specified value</td></tr><tr><td>Appearance</td><td>There shall be no leakage of electrolyte.</td></tr></table> <p>Recommendable reflow condition</p>  <table><tr><th>Size</th><th>Thickness (mm)</th><th>Tp (°C)</th><th>tL (second)</th><th>td (second)</th><th>tp (second)</th></tr><tr><td>Ø4~Ø6.3*7.7L</td><td>≥2.5</td><td>250±0</td><td>≤60</td><td>≤20</td><td>≤5</td></tr><tr><td>Ø8*6.5L</td><td>≥2.5</td><td>240±0</td><td>≤30</td><td>≤10</td><td>≤5</td></tr><tr><td>Ø8/10*13.5L</td><td>≥2.5</td><td>235±0</td><td>≤40</td><td>≤10</td><td>≤5</td></tr><tr><td>Ø12.5~Ø16</td><td>≥3.0</td><td>230±0</td><td>≤20</td><td>--</td><td>≤3</td></tr></table>	Leakage current	Not more than the specified value.	Capacitance Change	Within ± 10% of initial value.	Dissipation Factor	Not more than the specified value	Appearance	There shall be no leakage of electrolyte.	Size	Thickness (mm)	Tp (°C)	tL (second)	td (second)	tp (second)	Ø4~Ø6.3*7.7L	≥2.5	250±0	≤60	≤20	≤5	Ø8*6.5L	≥2.5	240±0	≤30	≤10	≤5	Ø8/10*13.5L	≥2.5	235±0	≤40	≤10	≤5	Ø12.5~Ø16	≥3.0	230±0	≤20	--	≤3
		Leakage current	Not more than the specified value.																																					
Capacitance Change	Within ± 10% of initial value.																																							
Dissipation Factor	Not more than the specified value																																							
Appearance	There shall be no leakage of electrolyte.																																							
Size	Thickness (mm)	Tp (°C)	tL (second)	td (second)	tp (second)																																			
Ø4~Ø6.3*7.7L	≥2.5	250±0	≤60	≤20	≤5																																			
Ø8*6.5L	≥2.5	240±0	≤30	≤10	≤5																																			
Ø8/10*13.5L	≥2.5	235±0	≤40	≤10	≤5																																			
Ø12.5~Ø16	≥3.0	230±0	≤20	--	≤3																																			

ITEM		PERFORMANCE				
17	Vent test	<p>< Condition></p> <p>The following test only apply to those products with vent products at diameter > 6.3 with vent.</p> <p>D. C. test</p> <p>The capacitor is connected with its polarity reversed to a DC power source. Then a current selected from Table 2 is applied.</p> <p>< Table 2 ></p> <table><tr><th>Diameter (mm)</th><th>DC Current (A)</th></tr><tr><td>22.4 or less</td><td>1</td></tr></table> <p><Criteria></p> <p>The vent shall operate with no dangerous conditions such as flames or dispersion of pieces of the capacitor and/or case.</p>	Diameter (mm)	DC Current (A)	22.4 or less	1
		Diameter (mm)	DC Current (A)			
		22.4 or less	1			


8、 V- Chip Type Aluminum Electrolytic Capacitors Carrier tape

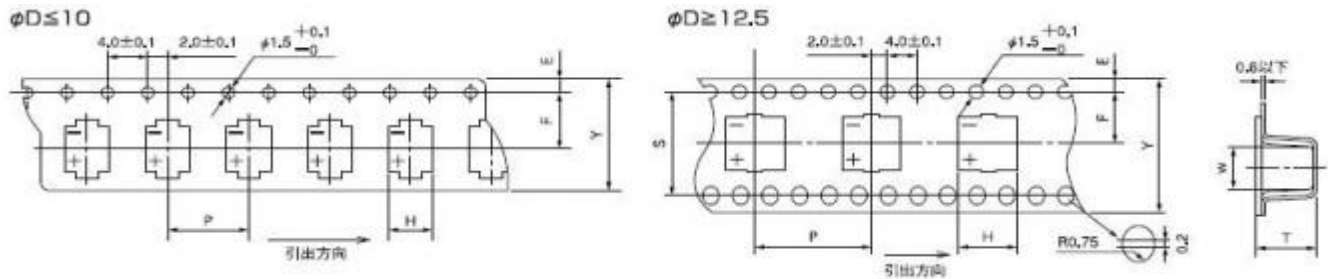

(mm)

ΦD*L	Y(±0.3)	P(±0. 1)	F(±0. 1)	H(±0.2)	T(±0. 1)	E(±0. 15)
4*3.95	12	8	5.5	4.5	4.4	1.75
4*4.5					5	
4*5.4/5.7					5.9	
4*5.8					6.4	
4*7					7.2	
4*10.5					11	
5*3.95		12		5.5	4.4	
5*4.5					5	
5*5.4/5.7					5.9	
5*5.8					6.4	
5*7	7.6					
5*10.5	11					
6.3*3.95	16	12	7.5	6.8	4.4	
6.3*4.5					5	
6.3*5.4/5.7					6.1	
6.3*5.8					6.4	
6.3*7.7					8.3	
6.3*8.7					9.3	
6.3*10.5					11	
8*6.2					8.7	
8*6.5				7.3		
8*10.5				11		
8*12.5	13.1					
10*7.7	24	16	11.5	10.7	8.7	
10*10.5					11	
10*12.5					13.0	
10*16						
12.5*13.5	32	24	14.2	13.4	14.5	
12.5*16.5					17.0	
16*16.5	44	28	20.2	17.5	23.0	
16*21.5					17.5	
18*16.5		32		19.5	17.5	
18*21.5					23.0	

Reel

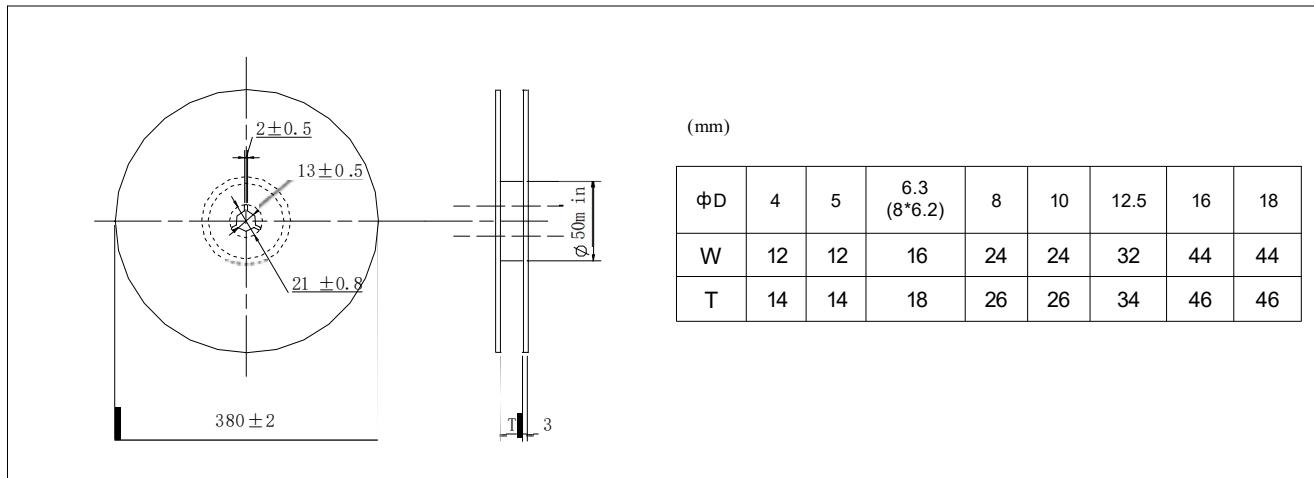

Package quantity

$\Phi D \times L$	Quantity / Reel 数量 / 每盘	pcs/ Small packing box 数量/小包装箱	pcs/Large packing box 数量/大包装箱
4*3.95、4*4.5、4*5.4、4*5.7、4*5.8	2000pcs	24000pcs	48000pcs
5*3.95、5*4.5、5*5.4、5*5.7、5*5.8、5*7	1000pcs	12000pcs	24000pcs
6.3*3.95、6.3*4.5、6.3*5.4、6.3*5.7、6.3*5.8、6.3*7.7、8*6.2、8*6.5	1000pcs	10000pcs	20000pcs
6.3*8.7	900pcs	9000pcs	18000pcs
4*10.5、5*10.5、6.3*10.5	700pcs	7000pcs	14000pcs
8*10.5、10*7.7、10*10.5	500pcs	3500pcs	7000pcs
8*12.5	400pcs	2800pcs	5600pcs
10*12.5	400pcs	2800pcs	5600pcs
10*16	350pcs	2450pcs	4900pcs
12.5*13.5	200pcs	1200pcs	2400pcs
12.5*16.5	150pcs	900pcs	1800pcs
16*16.5	125pcs	625pcs	1250pcs
16*21.5	75pcs	375pcs	750pcs
18*16.5	125pcs	625pcs	1250pcs
18*21.5	75pcs	375pcs	750pcs

ALUMINUM ELECTROLYTIC CAPACITORS

9、 Packing Information

Packing Label Marked (the following items shall be marked on the label)

(Inside box or bag)


(1) Clint order number (2) Client part number (3) Beryl part number (4) Capacitance (5) Voltage (6) Dimension
(7) Packaging quantity (8) Capacitance tolerance (9) QC Marking (10) Lot number (11) Series

LOT Number :

12 34 56 78910

↓ ↓ ↓ ↓
year month date number

1) Outer box

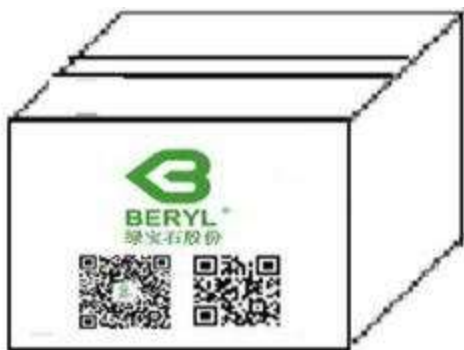

外箱

2) Outer box label:

BERYL Zhao Qing Beryl Electronic Technology Co., Ltd.			
C.S.R:		RoHS HF	
C.S.R P/O:			
C.S.R P/N:			
S.P.R P/N:		QC	
SPEC:			
QTY:	PCS	TOL:	%
L/N:		S.P.R	

10 、 Prohibition to Use Environment- related Substances

We are hereby to certify the followings:

Our company hereby warrants and guarantees that all or part of products, including, but not limited to, the peripherals, accessories or package, delivered to your company (including your subsidiaries and affiliated companies) directly or indirectly by our company are free from any of the substances listed below.

The latest version of <Substances Prohibited as per RoHS or <Sony-SS-00259>

Accord with heavy metal	Cadmium and cadmium compounds
	Lead and lead compounds
	Mercury and mercury compounds
	Hexavalent chromium compounds
Organic chlorin compounds	Polychlorinated biphenyls (PCB)
	Polychlorinated naphthalenes (PCN)
	Polychlorinated terphenyls (PCT)
	Chlorinated paraffins (CP)
	Other chlorinated organic compounds
Organic bromine compounds	Polybrominated biphenyls (PBB)
	Polybrominated diphenylethers (PBDE)
	Other brominated organic compounds
Tributyltin compounds	
Triphenyltin compounds	
Asbestos	
Specific azo compounds	
Formaldehyde	
Polyvinyl chloride (PVC) and PVC blends	
F 、 Cl 、 Br 、 I	
REACH	