


DC/DC Converter

URA_YMD-6WR3 & URB_YMD-6WR3 Series

MORNSUN®

6W Isolated DC-DC converter in YMD package
Ultra-wide input and regulated dual/single output

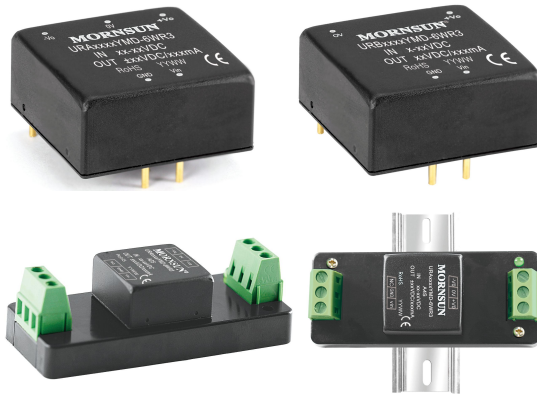

Patent Protection

CE Report EN62368-1 UK Report BS EN62368-1 CB IEC60950-1 RoHS

FEATURES

- Ultra-wide 4:1 input voltage range
- High efficiency up to 88%
- No-load power consumption as low as 0.12W
- I/O test isolation voltage: 1.5k VDC
- Input under-voltage protection, output short-circuit, over-current, over-voltage protection
- Operating ambient temperature range: -40°C to +85°C
- Meet CISPR32/EN55032 CLASS A, without extra components
- Input reverse polarity protection available with chassis(A2S) or Din-Rail mounting (A4S) version
- Industry standard pin-out

URA_YMD-6WR3 & URB_YMD-6WR3 series are isolated 6W DC-DC converter products with 4:1 input voltage range. They feature efficiencies up to 88%, 1500VDC input to output isolation and the converter safely operate ambient temperature of -40°C to +85°C, input under-voltage protection, output short-circuit, over-current, over-voltage protection. They meet CLASS A of CISPR32/EN55032 EMI standards without external components, optional packages are offered for chassis or DIN-rail mounting (A2S, A4S), adding additional input reverse polarity protection, which make them widely applied in medical care, industrial control, electric power, instruments and communication and railway fields.

Selection Guide

Certification	Part No. ①	Input Voltage (VDC)		Output		Full Load Efficiency ^③ (%) Min./Typ.	Capacitive Load ^⑤ (μF)Max.
		Nominal ^② (Range)	Max. ③	Voltage(VDC)	Current (mA) Max./Min.		
EN/BS EN/IEC	URA2405YMD-6WR3	24 (9-36)	40	±5	±600/0	81/83	470
	URA2412YMD-6WR3			±12	±250/0	84/87	100
	URA2415YMD-6WR3			±15	±200/0	83/85	100
	URA2424YMD-6WR3			±24	±125/0	85/87	100
	URB2403YMD-6WR3			3.3	1500/0	75/77	1800
	URB2405YMD-6WR3			5	1200/0	79/82	1000
	URB2409YMD-6WR3			9	667/0	82/84	680
	URB2412YMD-6WR3			12	500/0	83/85	470
	URB2415YMD-6WR3			15	400/0	84/86	220
	URB2424YMD-6WR3			24	250/0	84/86	100
	URA4805YMD-6WR3	48 (18-75)	80	±5	±600/0	81/83	470
	URA4812YMD-6WR3			±12	±250/0	85/87	100
	URA4815YMD-6WR3			±15	±200/0	86/88	100
	URB4803YMD-6WR3			3.3	1500/0	77/79	1800
	URB4805YMD-6WR3			5	1200/0	81/83	1000
	URB4812YMD-6WR3			12	500/0	85/87	470
	URB4815YMD-6WR3			15	400/0	86/88	220
	URB4824YMD-6WR3			24	250/0	86/88	100

Notes:

- ① Use "A2S" suffix for chassis mounting and "A4S" suffix for Din-Rail mounting;
- ② The A2S and A4S Model's start-up and minimum input voltages are increased by 1VDC due to the input reverse polarity protection circuit;
- ③ Exceeding the maximum input voltage may cause permanent damage;
- ④ Efficiency is measured at nominal input voltage and rated output load; efficiencies for A2S and A4S Model's is decreased by 2% due to the input reverse polarity protection circuit;
- ⑤ The specified maximum capacitive load value for Vo1 and Vo2 output is identical.

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2024.09.06-B/4

Page 1 of 6

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit	
Input Current (full load / no-load)	24VDC nominal input series, nominal input voltage	3.3V output	--	268/5	275/12	mA	
		Others	--	301/5	312/12		
	48VDC nominal input series, nominal input voltage	3.3V output	--	130/4	134/8		
		Others	--	150/4	155/8		
Reflected Ripple Current	Nominal input voltage		--	20	--		
Surge Voltage (1sec. max.)	24VDC nominal input series		-0.7	--	50	VDC	
	48VDC nominal input series		-0.7	--	100		
Start-up Voltage	24VDC nominal input series		--	--	9		
	48VDC nominal input series		--	--	18		
Input Under-voltage Protection	24VDC nominal input series		5.5	6.5	--		
	48VDC nominal input series		12	15.5	--		
Input Filter			Pi filter				
Hot Plug			Unavailable				

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Voltage Accuracy	0% - 100% load	Vo1	--	±1	±3	%
		Vo2	--	±3	±5	
Linear Regulation	Input voltage variation from low to high at full load	Vo1	--	±0.2	±0.5	
		Vo2	--	±0.5	±1	
Load Regulation ^①	5% -100% load	Vo1	--	±0.5	±1	
		Vo2	--	±0.5	±1.5	
Cross Regulation	Dual outputs, Vo1 load at 50%, Vo2 load at range of 10% - 100%		--	--	±5	
Transient Recovery Time			--	300	500	
Transient Response Deviation	25% load step change, nominal input voltage	3.3V, 5V, ±5V output	--	±5	±8	%
		Others	--	±3	±5	
Temperature Coefficient	Full load		--	--	±0.03	%/°C
Ripple & Noise ^②	20MHz bandwidth, 5% - 100% load		--	60	85	mV p-p
Over-voltage Protection	Input voltage range		110	--	160	%Vo
Over-current Protection			110	140	190	%Io
Short-circuit Protection			Continuous, self-recovery			

Note: ① Load regulation for 0%-100% load is ±5%;

② Under 0% - 5% load conditions, ripple & noise does not exceed 5%Vo. The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output Electric Strength Test for 1 minute with a leakage current of 1mA max.	1500	--	--	VDC
Insulation Resistance	Input-output resistance at 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V	--	1000	--	pF
Operating Temperature	See Fig. 1	-40	--	+85	°C
Storage Humidity	Non-condensing	5	--	95	%RH
Storage Temperature		-55	--	+125	°C
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	+300	
Vibration		IEC/EN61373 - Category 1, Grade B			
Switching Frequency *	PWM mode	--	300	--	kHz
MTBF	MIL-HDBK-217F@25°C	1000	--	--	k hours

Note: * Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.

Mechanical Specifications

Case Material	Aluminum alloy	
Dimensions	Horizontal package	25.40 x 25.40 x 11.70 mm
	A2S chassis mounting	76.00 x 31.50 x 21.20 mm
	A4S DIN-rail mounting	76.00 x 31.50 x 25.80 mm
Weight	Horizontal package/A2S wiring package/A4S rail package	12.5g /36.0g /56.0g(Typ.)
Cooling method	Free air convection	

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS A (without extra components)/ CLASS B (see Fig.3-② for recommended circuit)	
	RE	CISPR32/EN55032	CLASS A (without extra components)/ CLASS B (see Fig.3-② for recommended circuit)	
Immunity	ESD	IEC/EN61000-4-2	Contact $\pm 4\text{kV}$	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 2\text{kV}$ (see Fig.3-① for recommended circuit)	perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line $\pm 2\text{kV}$ (see Fig.3-① for recommended circuit)	perf. Criteria B
	CS	IEC/EN61000-4-6	3 Vr.m.s	perf. Criteria A
	Voltage dips, short interruptions and voltage variations Immunity	IEC/EN61000-4-29	0%, 70%	perf. Criteria B

Electromagnetic Compatibility (EMC) (EN50155)

Emissions	CE	EN50121-3-2	150kHz-500kHz	99dBuV (see Fig.3-② for recommended circuit)	
		EN55016-2-1	500kHz-30MHz	93dBuV (see Fig.3-② for recommended circuit)	
	RE	EN50121-3-2	30MHz-230MHz	40dBuV/m at 10m (see Fig.3-② for recommended circuit)	
		EN55016-2-1	230MHz-1GHz	47dBuV/m at 10m (see Fig.3-② for recommended circuit)	
Immunity	ESD	EN50121-3-2	Contact $\pm 6\text{kV}$ /Air $\pm 8\text{kV}$		perf. Criteria A
	RS	EN50121-3-2	20V/m		perf. Criteria A
	EFT	EN50121-3-2	$\pm 2\text{kV}$ 5/50ns 5kHz (see Fig.3-① for recommended circuit)		perf. Criteria A
	Surge	EN50121-3-2	line to line $\pm 1\text{kV}$ (42 Ω , 0.5 μF) (see Fig.3-① for recommended circuit)		perf. Criteria A
	CS	EN50121-3-2	0.15MHz-80MHz 10V r.m.s		perf. Criteria A

Typical Characteristic Curve





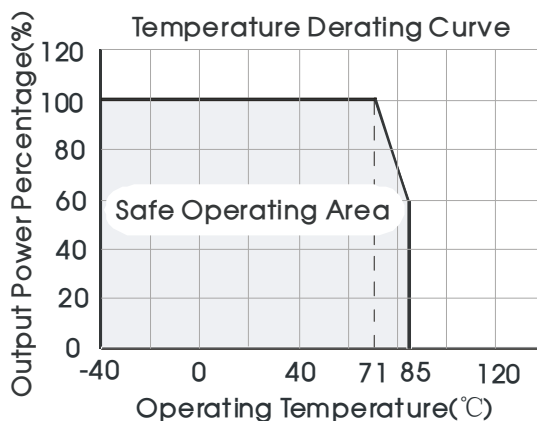


Fig. 1

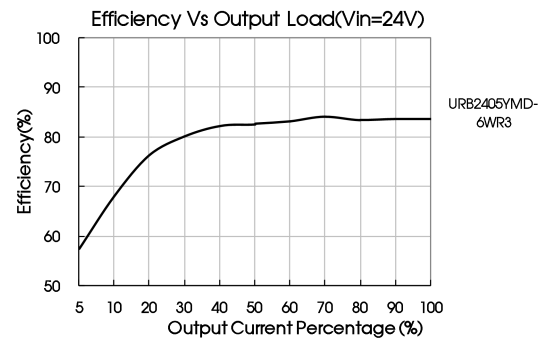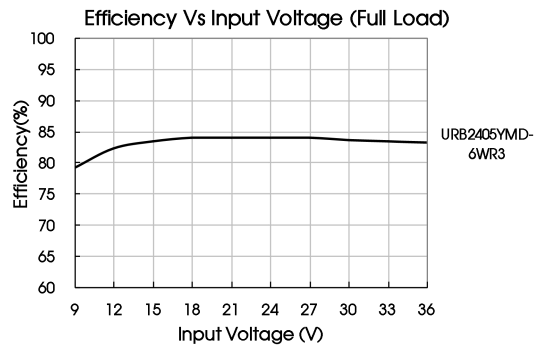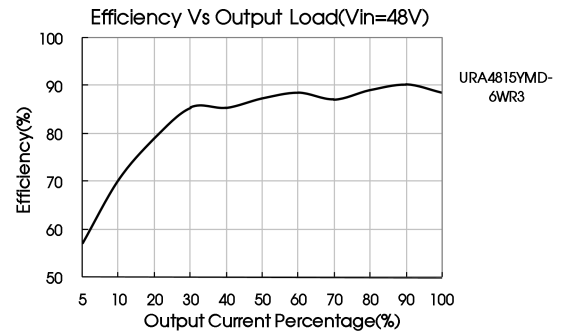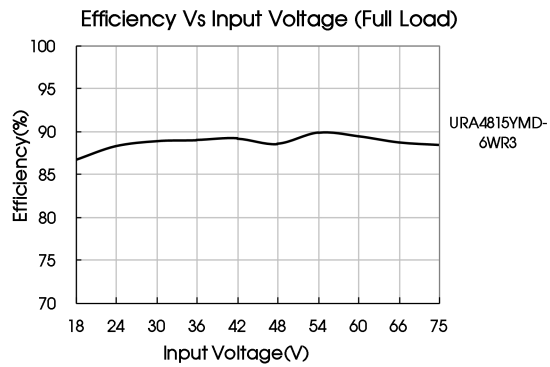

Design Reference

1. Typical application

All the DC/DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2.

Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values C_{in} and C_{out} and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.

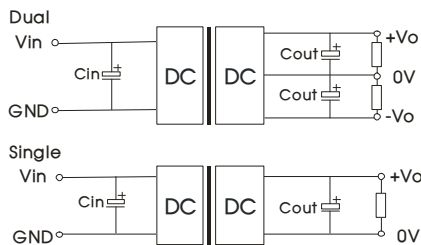


Fig. 2

Vin(VDC)	Cin	Cout
24	100μF/50V	10μF/50V
48	10 μF- 47μF/100V	10μF/50V

2. EMC compliance circuit

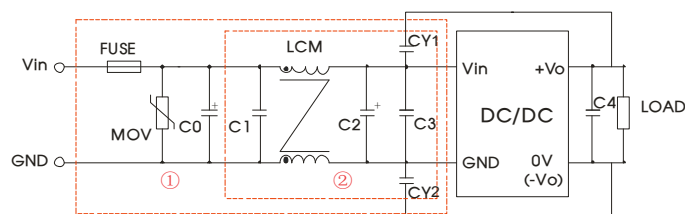


Fig. 3

Notes: For EMC tests we use Part ① in Fig. 3 for immunity and part ② for emissions test. Selecting based on needs.


Parameter description:

Model	Vin: 24VDC	Vin: 48VDC
FUSE	Choose according to actual input current	
MOV	S20K30	S14K60
C0	680μF/50V	680μF/100V
C1	1μF/50V	1μF/100V
C2	330μF/50V	330μF/100V
C3	4.7μF/50V	4.7μF/100V
C4	Refer to the Cout in Fig.2	
LCM	4.7mH	
CY1/CY2	1nF/2kV	

3. The products do not support parallel connection of their output


4. For additional information please refer to DC-DC converter application notes on www.mornsun-power.com

Dimensions and Recommended Layout

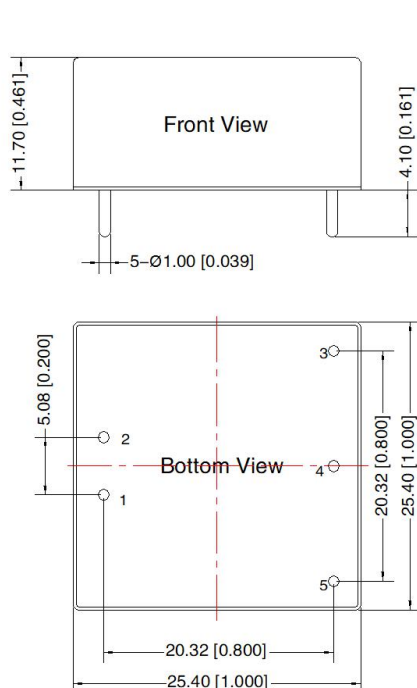

Note:
Unit: mm[inch]
PIN1/2/3/4/5: ϕ 1.0mm
Pin diameter tolerances: ± 0.10 [± 0.004]
General tolerances: ± 0.50 [± 0.020]


THIRD ANGLE PROJECTION

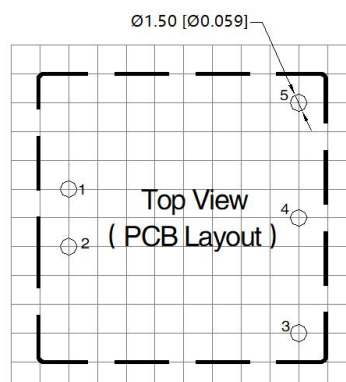

Note: Grid 2.54*2.54mm

Pin-Out		
Pin	Single	Dual
1	GND	GND
2	V _{in}	V _{in}
3	+V _o	+V _o
4	No Pin	0V
5	0V	-V _o

URA_YMD-6WR3A2S & URB_YMD-6WR3A2S Dimensions

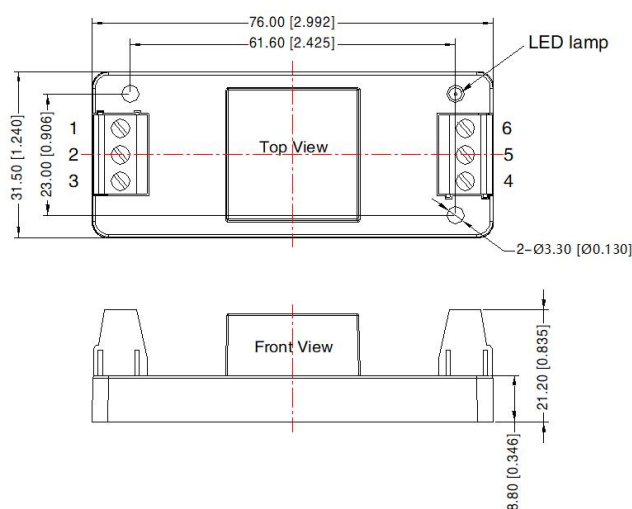


Pin-Out						
Pin	1	2	3	4	5	6
Dual	NC	GND	V _{in}	+V _o	0V	-V _o
Single	NC	GND	V _{in}	+V _o	NC	0V

Note:
Unit: mm[inch]
Wire range: 24-12 AWG
Tightening torque: Max 0.4 N · m
General tolerances: ± 1.00 [± 0.039]


THIRD ANGLE PROJECTION

URA_YMD-6WR3A4S & URB_YMD-6WR3A4S Dimensions

THIRD ANGLE PROJECTION 

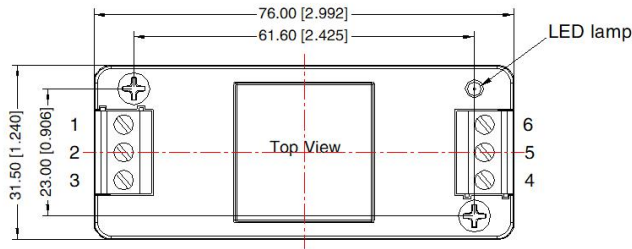

Pin-Out						
Pin	1	2	3	4	5	6
Dual	NC	GND	Vin	+Vo	0V	-Vo
Single	NC	GND	Vin	+Vo	NC	0V

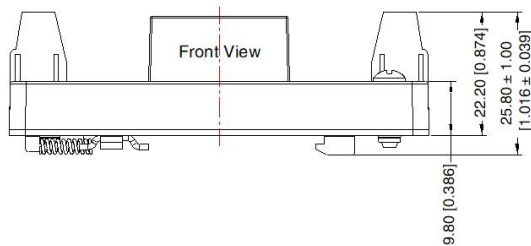

Note:
Unit: mm[inch]
Mounting rail: TS35
Wire range: 24-12 AWG
Tightening torque: Max 0.4 N · m
General tolerances: ± 1.00 [± 0.039]

Note:

- For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58210003(DIP), 58220022(A2S/A4S package);
- It is recommended that the load imbalance of the dual output is $\leq \pm 5\%$. If it exceeds $\pm 5\%$, the performance of the product cannot be guaranteed to meet as datasheet marked. For details, please contact our technical staff;
- The maximum capacitive load offered were tested at input voltage range and full load;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^\circ\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on company corporate standards;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 8, Nanyun 4th Road, Huangpu District, Guangzhou, China
Tel: 86-20-38601850 Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com