

Product Specification

XBLW CD4021

8-Bit Static Shift Register


WEB | www.xinboleic.com



Description

The CD4021 is an 8-bit static shift register (parallel-to-serial converter) with a synchronous serial data input (DS), a clock input (CP), an asynchronous active HIGH parallel load input (PL), eight asynchronous parallel data inputs (D0 to D7) and buffered parallel outputs from the last three stages (Q5 to Q7). Each register stage is a D-type master-slave flip-flop with a set direct (SD) and clear direct (CD) input. Information on D0 to D7 is asynchronously loaded into the register while PL is HIGH, independent of CP and DS. When PL is LOW, data on DS is shifted into the first register position and all the data in the register is shifted one position to the right on the LOW-to-HIGH transition of CP. Schmitt trigger action makes the clock input highly tolerant of slower rise and fall times.

It operates over a recommended V_{DD} power supply range of 3V to 15V referenced to V_{SS} (usually ground). Unused inputs must be connected to V_{DD} , V_{SS} , or another input.

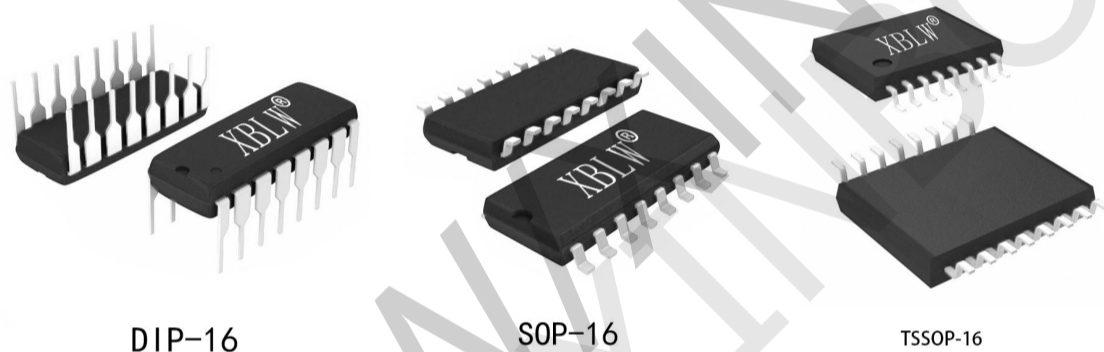

Feature

- Tolerant of slower rise and fall times
- Fully static operation
- 5V, 10V, and 15V parametric ratings
- Standardized symmetrical output characteristics
- Specified from -40°C to +105°C
- Packaging information: DIP16/SOP16/TSSOP16

Ordering Information

Product Model	Package Type	Marking	Packing	Packing Qty
XBLW CD4021BE	DIP-16	CD4021BE	Tube	1000Pcs/Box
XBLW CD4021BDTR	SOP-16	CD4021B	Tape	2500Pcs/Reel
XBLW CD4021BDTDR	TSSOP-16	CD4021B	Tape	3000Pcs/Reel

Block Diagram And Pin Description

Block Diagram

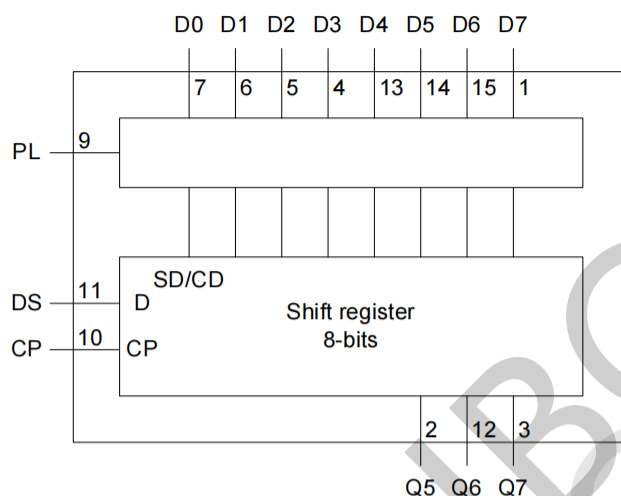


Figure 1. Functional diagram


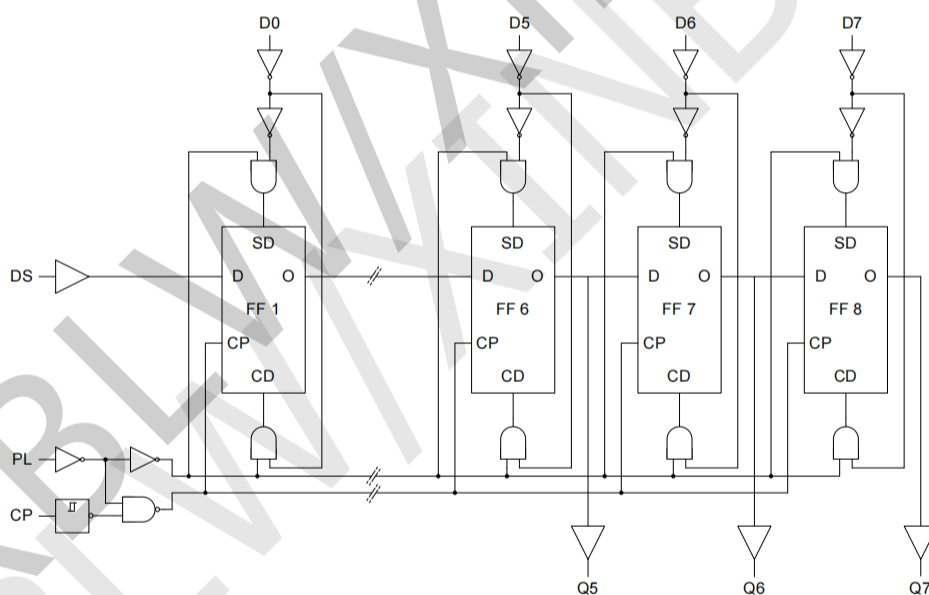


Figure 2. Logic diagram

Pin Configurations

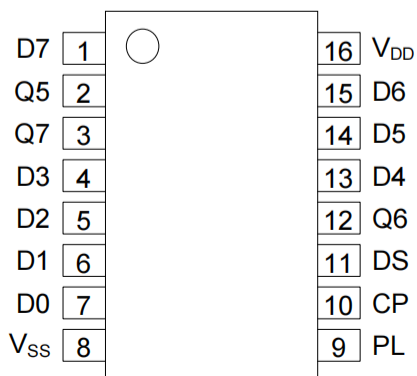

Pin Description

Pin No.	Pin Name	Description
1	D7	parallel data input
2	Q5	buffered parallel output from the last three stages
3	Q7	buffered parallel output from the last three stages
4	D3	parallel data input
5	D2	parallel data input
6	D1	parallel data input
7	D0	parallel data input
8	V _{SS}	ground supply voltage
9	PL	parallel load input
10	CP	clock input (LOW-to-HIGH edge-triggered)
11	DS	serial data input
12	Q6	buffered parallel output from the last three stages
13	D4	parallel data input
14	D5	parallel data input
15	D6	parallel data input
16	V _{DD}	supply voltage

Function Table

Number of clock transitions	Inputs			Outputs		
	CP	DS	PL	Q5	Q6	Q7
Serial operation						
1	↑	data 1	L	X	X	X
2	↑	data 2	L	X	X	X
3	↑	data 3	L	X	X	X
6	↑	X	L	data 1	X	X
7	↑	X	L	data 2	data 1	X
8	↑	X	L	data 3	data 2	data 1
	↓	X	L	no change	no change	no change
Parallel operation						
	X	X	H	D5	D6	D7

Note:

[1] H=HIGH voltage level; L=LOW voltage level; X=don't care; ↑=LOW to HIGH clock transition; ↓=HIGH to LOW clock transition; data n=data (HIGH or LOW) on the DS input at the nth ↑ CP transition.

Electrical Parameter

Absolute Maximum Ratings ($T_{amb}=25^{\circ}\text{C}$, unless otherwise specified.)

Characteristic	Symbol	Conditions	Min.	Max.	Unit
supply voltage	V_{DD}	-	-0.5	+18	V
input clamping current	I_{IK}	$V_I < -0.5\text{V}$ or $V_I > V_{DD} + 0.5\text{V}$	-	± 10	mA
input voltage	V_I	-	-0.5	$V_{DD} + 0.5$	V
output clamping current	I_{OK}	$V_I < -0.5\text{V}$ or $V_I > V_{DD} + 0.5\text{V}$	-	± 10	mA
input/output current	$I_{I/O}$	-	-	± 10	mA
supply current	I_{DD}	-	-	50	mA
operating temperature	T_{amb}	-	-40	+105	$^{\circ}\text{C}$
storage temperature	T_{stg}	-	-65	+150	$^{\circ}\text{C}$
total power dissipation	P_{tot}	-	-	500	mW
power dissipation	P_D	per output	-	100	mW
soldering temperature	T_L	10s DIP	-	245	$^{\circ}\text{C}$
		10s SOP/TSSOP	-	260	$^{\circ}\text{C}$

Recommended Operating Conditions

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
supply voltage	V_{DD}	-	3	-	15	V
input voltage	V_I	-	0	-	V_{DD}	V
operating temperature	T_{amb}	-	-40	-	+125	$^{\circ}\text{C}$

Electrical Characteristics

DC Characteristics 1 (Tamb=25℃, voltages are referenced to Vss (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions(V)			Tamb=25℃			Unit
		Vo	VIN	VDD	Min.	Typ.	Max.	
supply current	IDD	-	0, 5	5	-	-	5	μA
		-	0, 10	10	-	-	10	μA
		-	0, 15	15	-	-	20	μA
LOW-level output current	IOL	0.4	0, 5	5	0.5	-	-	mA
		0.5	0, 10	10	1.3	-	-	mA
		1.5	0, 15	15	3.4	-	-	mA
HIGH-level output current	IOH	4.6	0, 5	5	-	-	-0.5	mA
		2.5	0, 5	5	-	-	-1.4	mA
		9.5	0, 10	10	-	-	-1.3	mA
		13.5	0, 15	15	-	-	-3.4	mA
LOW-level output voltage	VOL	-	0, 5	5	-	-	0.05	V
		-	0, 10	10	-	-	0.05	V
		-	0, 15	15	-	-	0.05	V
HIGH-level output voltage	VOH	-	0, 5	5	4.95	-	-	V
		-	0, 10	10	9.95	-	-	V
		-	0, 15	15	14.95	-	-	V
LOW-level input voltage	VIL	4.5	-	5	-	-	1.5	V
		9	-	10	-	-	3	V
		13.5	-	15	-	-	4	V
HIGH-level input voltage	VIH	0.5, 4.5	-	5	3.5	-	-	V
		1, 9	-	10	7	-	-	V
		1.5, 13.5	-	15	11	-	-	V
input leakage current	II	-	0, 15	15	-	-	±1.0	μA
input capacitance	CI	-	-	-	-	-	7.5	pF

DC Characteristics 2

($T_{amb} = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$, voltages are referenced to V_{SS} (ground=0V), unless otherwise specified)

Parameter	Symbol	Conditions(V)			$T_{amb} = -40^{\circ}\text{C}$		$T_{amb} = +85^{\circ}\text{C}$		$T_{amb} = +125^{\circ}\text{C}$		Unit
		VO	VIN	VDD	Min.	Max.	Min.	Max.	Min.	Max.	
supply current	IDD	-	0, 5	5	-	5	-	150	-	15	μA
		-	0, 10	10	-	10	-	300	-	300	μA
		-	0, 15	15	-	20	-	600	-	600	μA
LOW-level output current	IOL	0.4	0, 5	5	0.64	-	0.36	-	0.36	-	mA
		0.5	0, 10	10	1.6	-	0.9	-	0.9	-	mA
		1.5	0, 15	15	4.2	-	2.4	-	2.4	-	mA
HIGH-level output current	IOH	4.6	0, 5	5	-	-0.64	-	-0.36	-	-0.36	mA
		2.5	0, 5	5	-	-1.7	-	-1.1	-	-1.1	mA
		9.5	0, 10	10	-	-1.6	-	-0.9	-	-0.9	mA
		13.5	0, 15	15	-	-4.2	-	-2.4	-	-2.4	mA
LOW-level output voltage	VOL	-	0, 5	5	-	0.05	-	0.05	-	0.05	V
		-	0, 10	10	-	0.05	-	0.05	-	0.05	V
		-	0, 15	15	-	0.05	-	0.05	-	0.05	V
HIGH-level output voltage	VOH	-	0, 5	5	4.95	-	4.95	-	4.95	-	V
		-	0, 10	10	9.95	-	9.95	-	9.95	-	V
		-	0, 15	15	14.95	-	14.95	-	14.95	-	V
LOW-level input voltage	VIL	4.5	-	5	-	1.5	-	1.5	-	1.5	V
		9	-	10	-	3	-	3	-	3	V
		13.5	-	15	-	4	-	4	-	4	V
HIGH-level input voltage	VIH	0.5, 4.5	-	5	3.5	-	3.5	-	3.5	-	V
		1, 9	-	10	7	-	7	-	7	-	V
		1.5, 13.5	-	15	11	-	11	-	11	-	V
input leakage current	II	-	0, 15	15	-	± 0.1	-	± 1.0	-	± 1.0	μA

AC Characteristics

($T_{amb}=25^{\circ}\text{C}$, $V_{SS}=0\text{V}$, unless otherwise specified)

Parameter	Symbol	Conditions	VDD	Min.	Typ.	Max.	Unit
HIGH to LOW propagation delay	t_{PHL}	CP to Qn; see Figure 4	5	-	125	250	ns
			10	-	55	110	ns
			15	-	40	80	ns
		PL to Qn; see Figure 4	5	-	135	240	ns
			10	-	78	110	ns
			15	-	65	80	ns
LOW to HIGH propagation delay	t_{PLH}	CP to Qn; see Figure 4	5	-	115	230	ns
			10	-	50	100	ns
			15	-	40	80	ns
		PL to Qn; see Figure 4	5	-	135	210	ns
			10	-	78	100	ns
			15	-	72	80	ns
transition time	t_t	Qn; see Figure 4	5	-	60	120	ns
			10	-	30	60	ns
			15	-	20	40	ns
set-up time	t_{SU}	DS to CP; see Figure 5	5	+25	+4	-	ns
			10	+25	0	-	ns
			15	+15	0	-	ns
		Dn to PL; see Figure 6	5	50	-11	-	ns
			10	30	-7	-	ns
			15	20	-3	-	ns
hold time	t_h	DS to CP; see Figure 5	5	40	8	-	ns
			10	20	3	-	ns
			15	15	0	-	ns
		Dn to PL; see Figure 6	5	+15	-13	-	ns
			10	15	-9	-	ns
			15	15	-4	-	ns
pulse width	t_w	CP=LOW; minimum width; see Figure 5	5	70	35	-	ns
			10	30	15	-	ns
			15	24	12	-	ns
		PL=HIGH; minimum width; see Figure 6	5	70	35	-	ns
			10	30	15	-	ns
			15	24	12	-	ns
recovery time	t_{rec}	PL input; see Figure 6	5	50	10	-	ns
			10	40	5	-	ns
			15	35	5	-	ns
maximum clock frequency	$F_{clk(max)}$	CP input; see Figure 5	5	-	13	-	MHz
			10	-	30	-	MHz
			15	-	40	-	MHz

Testing Circuit

AC Testing Circuit

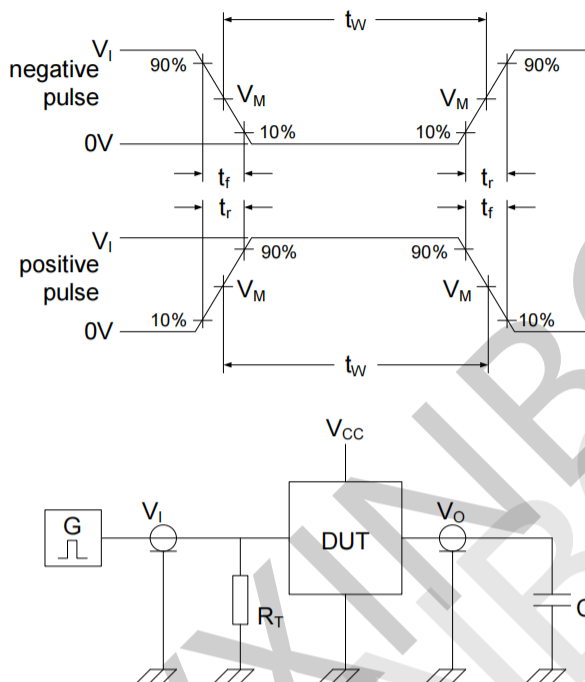


Figure 3. Test circuit for switching times

Definitions for test circuit: DUT=Device Under Test

C_L =Load capacitance including jig and probe capacitance.

R_T =Termination resistance should be equal to the output impedance Z_o of the pulse generator.

AC Testing Waveforms

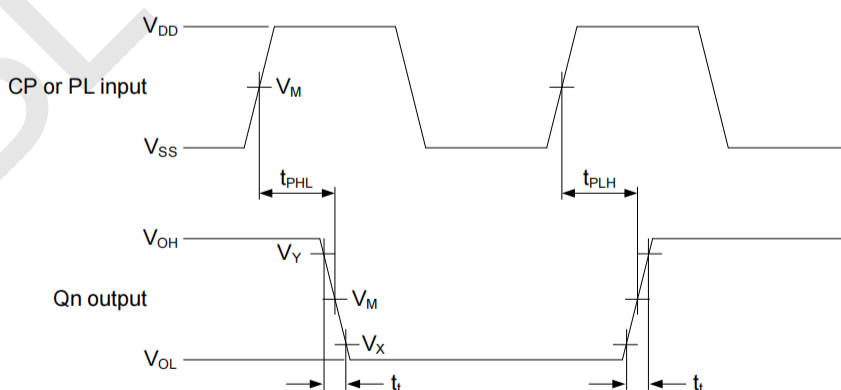


Figure 4. Waveforms showing propagation delays for CP and PL inputs to Qn output and Qn transition times

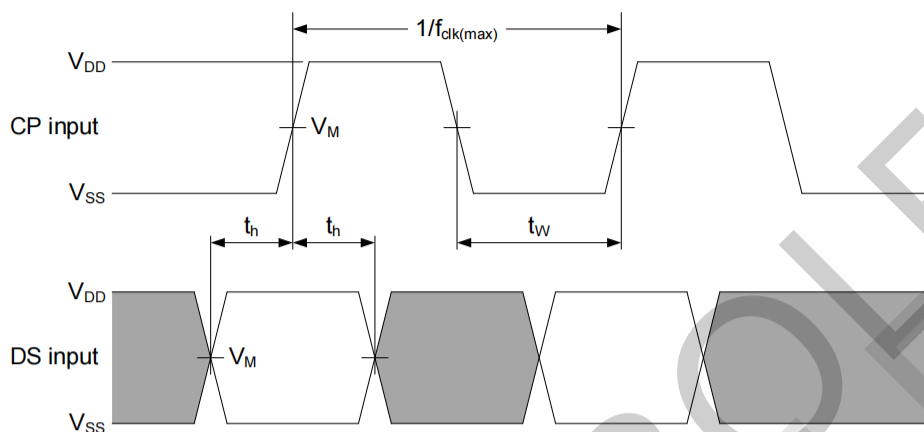


Figure 5. Waveforms showing minimum clock pulse width, set-up time, and hold time for CP and DS.

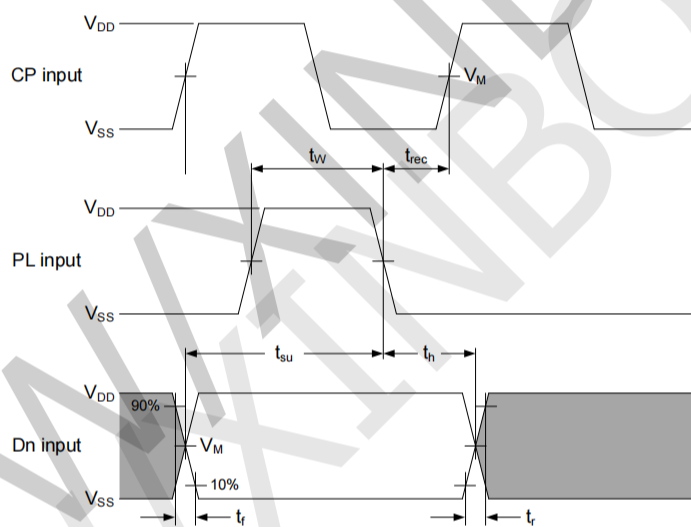


Figure 6. Waveforms showing minimum pulse width and recovery time for PL; set-up and hold times for Dn to PL.

Measurement Points

Supply voltage	Input	Output		
V_{DD}	V_M	V_M	V_X	V_Y
5V to 15V	$0.5 \times V_{DD}$	$0.5 \times V_{DD}$	$0.1 \times V_{DD}$	$0.9 \times V_{DD}$


Test Data

Supply voltage	Input		Load
V_{DD}	V_I	t_r, t_f	C_L
5V to 15V	V_{SS} or V_{DD}	$\leq 20\text{ns}$	50pF

Package Information


• DIP-16

Symbol	Size	Dimensions In Millimeters		Symbol	Size	Dimensions In Inches	
		Min(mm)	Max(mm)			Min(in)	Max(in)
A		3.710	4.310	A		0.146	0.170
A1		0.510		A1		0.020	
A2		3.200	3.600	A2		0.126	0.142
B		0.380	0.570	B		0.015	0.022
B1		1.524 (BSC)		B1		0.060 (BSC)	
C		0.204	0.360	C		0.008	0.014
D		18.80	19.20	D		0.740	0.756
E		6.200	6.600	E		0.244	0.260
E1		7.320	7.920	E1		0.288	0.312
e		2.540 (BSC)		e		0.100 (BSC)	
L		3.000	3.600	L		0.118	0.142
E2		8.400	9.000	E2		0.331	0.354

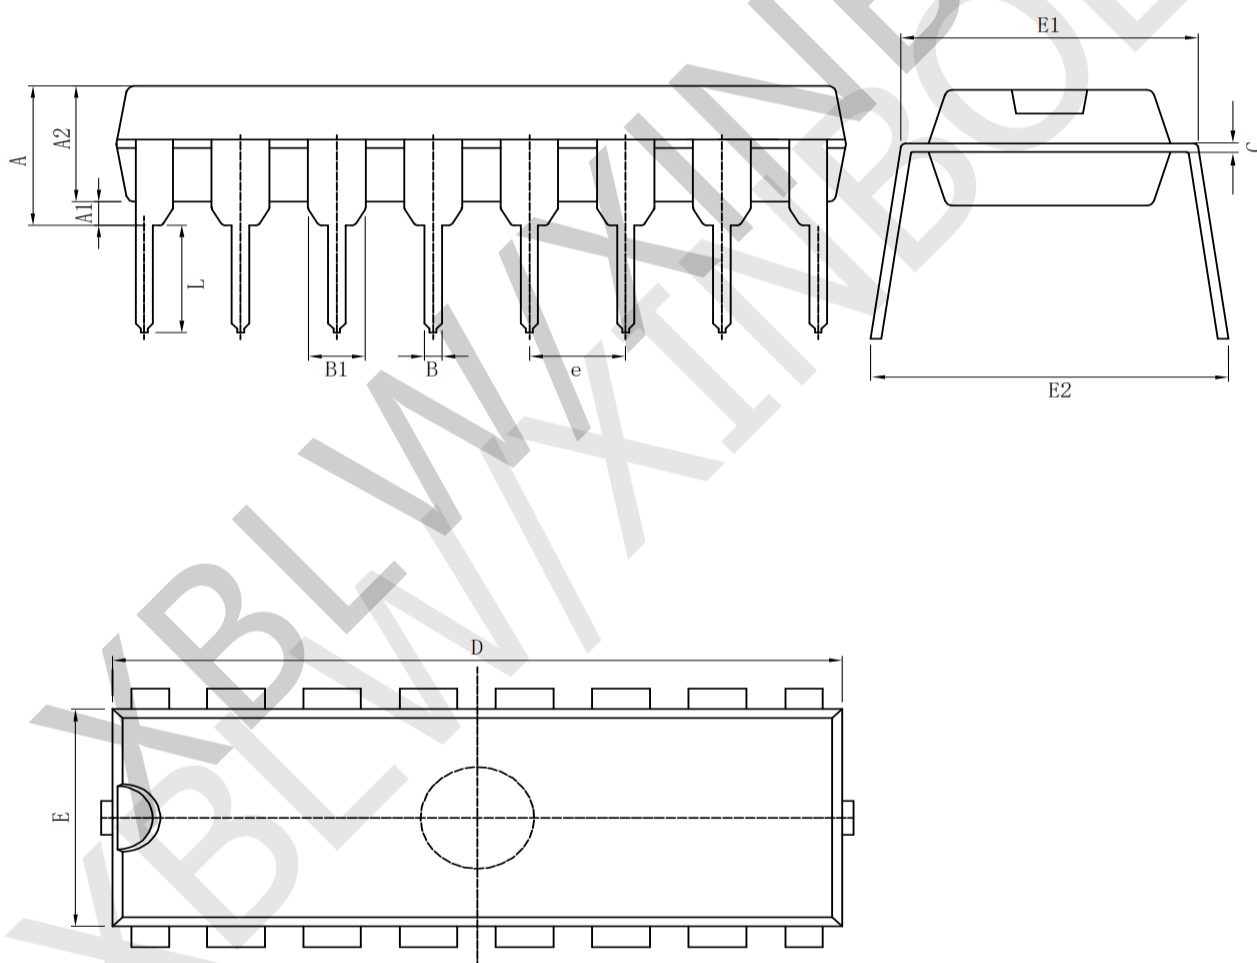


· SOP-16

Symbol	Dimensions In Millimeters			Symbol	Dimensions In Inches		
	Min(mm)	Nom(mm)	Max(mm)		Min(in)	Nom(in)	Max(in)
A	1.500	1.600	1.700	A	0.059	0.063	0.067
A1	0.100	0.150	0.250	A1	0.004	0.006	0.010
A2	1.400	1.450	1.500	A2	0.055	0.057	0.059
A3	0.600	0.650	0.700	A3	0.024	0.026	0.028
b	0.300	0.400	0.500	b	0.012	0.016	0.020
c	0.150	0.200	0.250	c	0.006	0.008	0.010
D	9.800	9.900	10.00	D	0.386	0.390	0.394
E	5.800	6.000	6.200	E	0.228	0.236	0.244
E1	3.850	3.900	3.950	E1	0.152	0.154	0.156
e	1.27 (BSC)			e	0.050 (BSC)		
L	0.500	0.600	0.700	L	0.020	0.024	0.028
L1	1.05 (BSC)			L1	0.041 (BSC)		
θ	0°	4°	8°	θ	0°	4°	8°

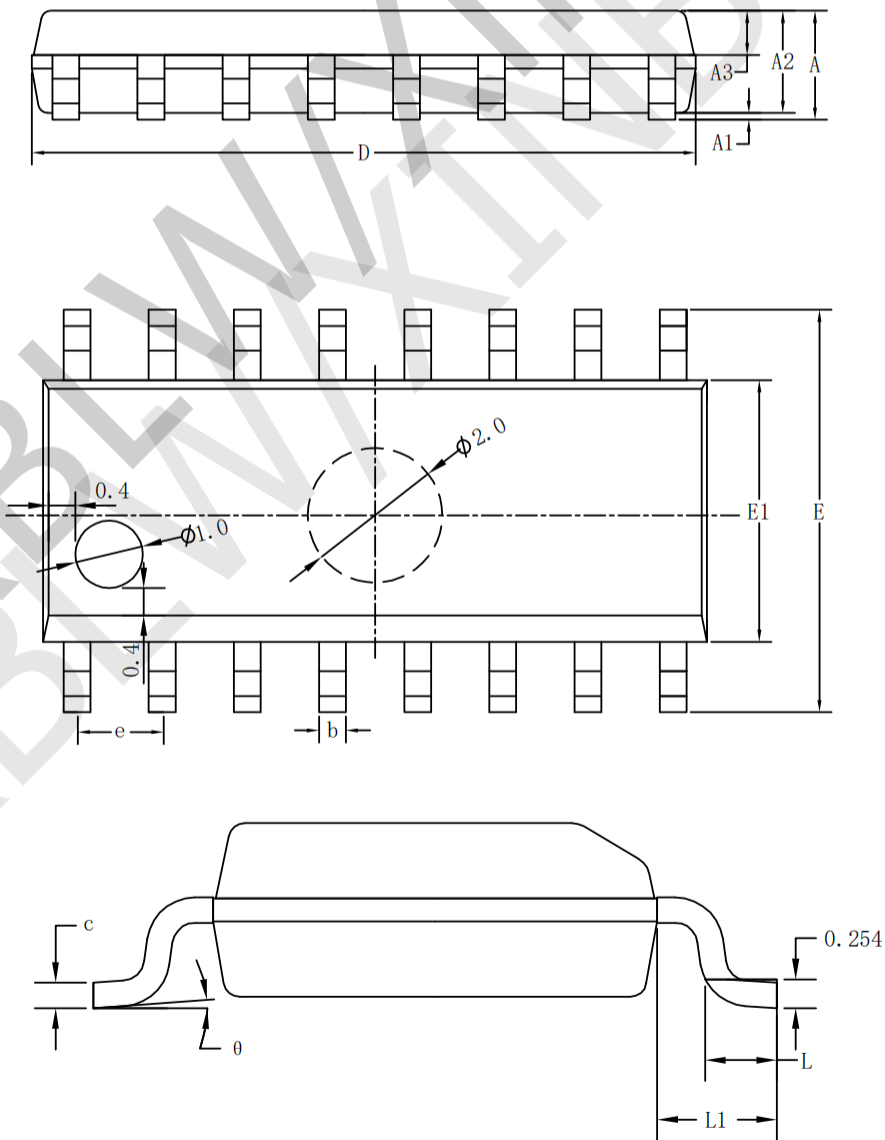

· TSSOP-16

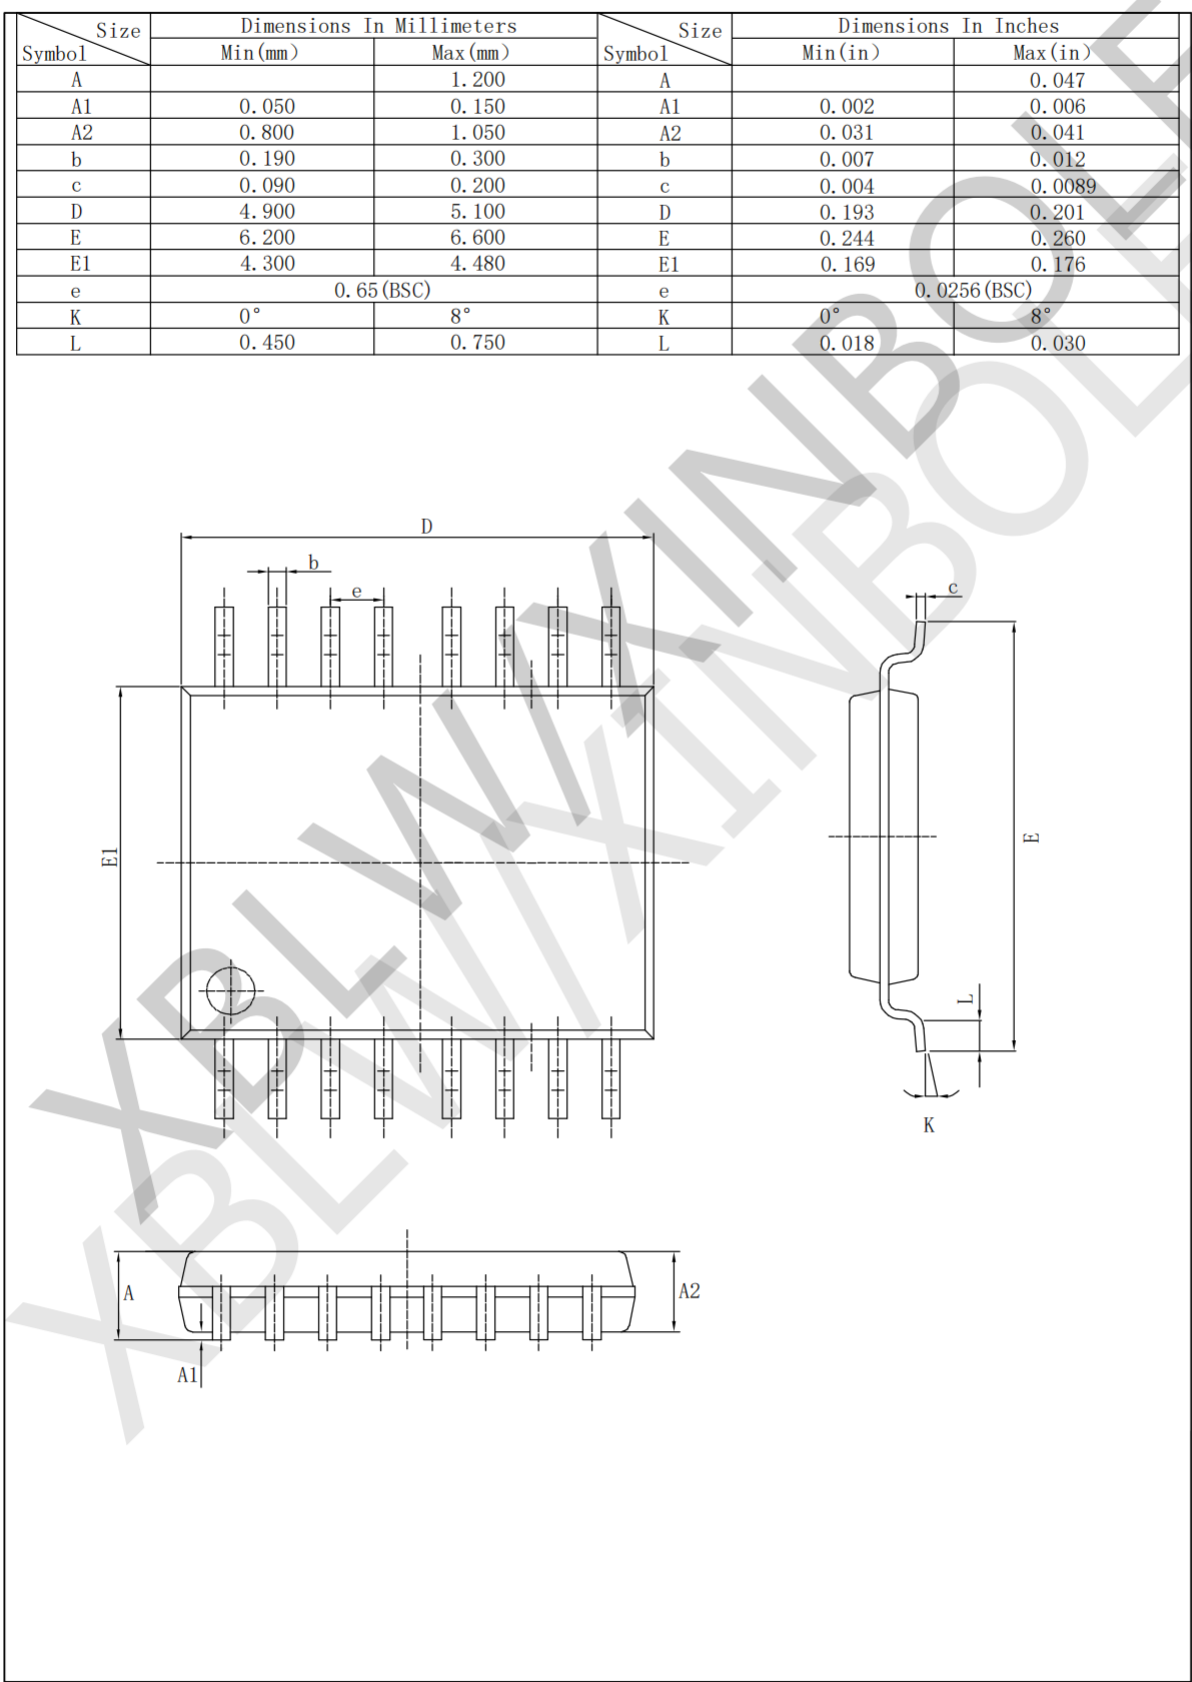

Statement:

- XBLW reserves the right to modify the product manual without prior notice! Before placing an order, customers need to confirm whether the obtained information is the latest version and verify the completeness of the relevant information.
- Any semi-guide product is subject to failure or malfunction under specified conditions. It is the buyer's responsibility to comply with safety standards when using XBLW products for system design and whole machine manufacturing. And take the appropriate safety measures to avoid the potential in the risk of loss of personal injury or loss of property situation!
- XBLW products have not been licensed for life support, military, and aerospace applications, and therefore XBLW is not responsible for any consequences arising from the use of this product in these areas.
- If any or all XBLW products (including technical data, services) described or contained in this document are subject to any applicable local export control laws and regulations, they may not be exported without an export license from the relevant authorities in accordance with such laws.
- The specifications of any and all XBLW products described or contained in this document specify the performance, characteristics, and functionality of said products in their standalone state, but do not guarantee the performance, characteristics, and functionality of said products installed in Customer's products or equipment. In order to verify symptoms and conditions that cannot be evaluated in a standalone device, the Customer should ultimately evaluate and test the device installed in the Customer's product device.
- XBLW documentation is only allowed to be copied without any alteration of the content and with the relevant authorization. XBLW assumes no responsibility or liability for altered documents.
- XBLW is committed to becoming the preferred semiconductor brand for customers, and XBLW will strive to provide customers with better performance and better quality products.