

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
60V	$1.7\Omega@10V$	300mA
	$1.8\Omega@4.5V$	



合肥矽普半导体

Siliup Semiconductor Technology Co., Ltd

技术 品质 服务

www.siliup.com


Feature

- High power and current handling capability
- Surface mount package

Application


- Battery Switch
- DC/DC Converter

Package




SOT-363

Circuit diagram



Marking



K72 :Device Code

Order Information

Device	Package	Unit/Tape
2N7002DW	SOT-363	3000


Absolute maximum ratings (Ta=25°C, unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	60	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current	I_D	300	mA
Pulse Drain Current Tested	I_{DM}	1200	mA
Power Dissipation	P_D	150	mW
Thermal Resistance Junction-to-Ambient	$R_{\theta JA}$	833	°C/W
Storage Temperature Range	T_{STG}	-55 to 150	°C
Operating Junction Temperature Range	T_J	-55 to 150	°C


Electrical characteristics (Ta=25°C, unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	BV _{DSS}	VGS=0V , ID=250μA	60	-	-	V
Drain-Source Leakage Current	I _{DSS}	VDS=48V , VGS=0V	-	-	1	uA
Gate-Source Leakage Current	I _{GSS}	VGS=±20V , VDS=0V	-	-	±1	uA
Gate Threshold Voltage	VGS(th)	VDS=VGS , ID=250μA	1	1.5	2.5	V
Static Drain-Source On-Resistance	R _{DS(ON)}	VGS =10V, ID =500mA	-	1.7	3	Ω
		VGS =4.5V, ID =200mA	-	1.8	4	
Dynamic characteristics						
Input Capacitance	C _{iss}	VDS=25V , VGS=0V , f=1MHz	-	28	-	pF
Output Capacitance	C _{oss}		-	10	-	
Reverse Transfer Capacitance	C _{rss}		-	5	-	
Total Gate Charge	Q _g	VDS=10V , VGS=4.5V , ID=300mA	-	1.7	-	nC
Gate-Source Charge	Q _{gs}		-	0.35	-	
Gate-Drain Charge	Q _{gd}		-	0.5	-	
Switching Characteristics						
Turn-On Delay Time	t _{d(on)}	VDD=30V VGS=10V , RG=25Ω , ID=300mA	-	3	-	nS
Turn-On Rise Time	t _r		-	17	-	
Turn-Off Delay Time	t _{d(off)}		-	10	-	
Turn-Off Fall Time	t _f		-	21	-	
Source-Drain Diode characteristics						
Diode Forward Voltage	V _{SD}	VGS=0V , IS=1A , TJ=25℃	-	-	1.2	V


Typical Characteristics

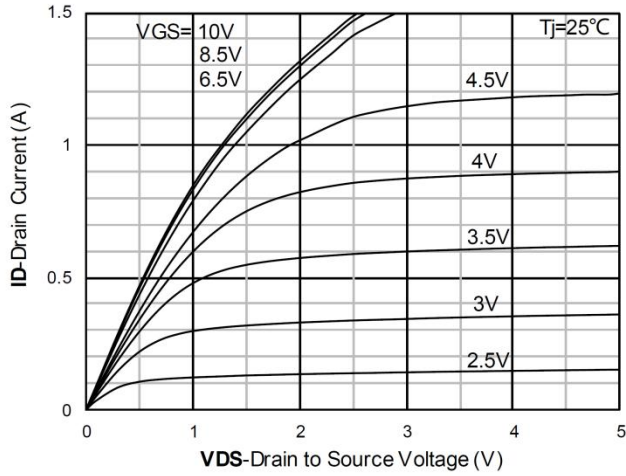


Output Characteristics

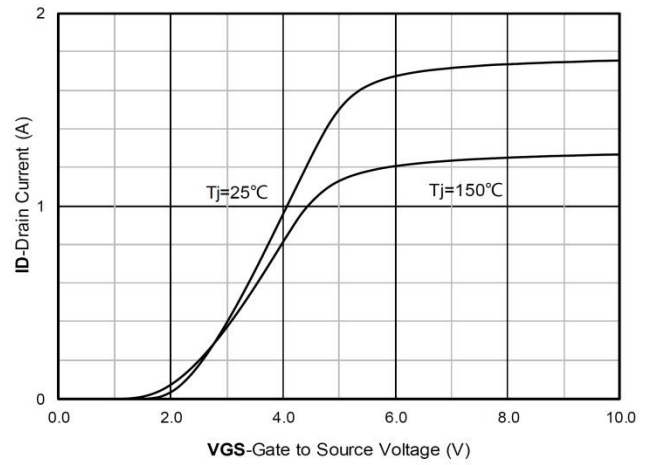


Transfer Characteristics

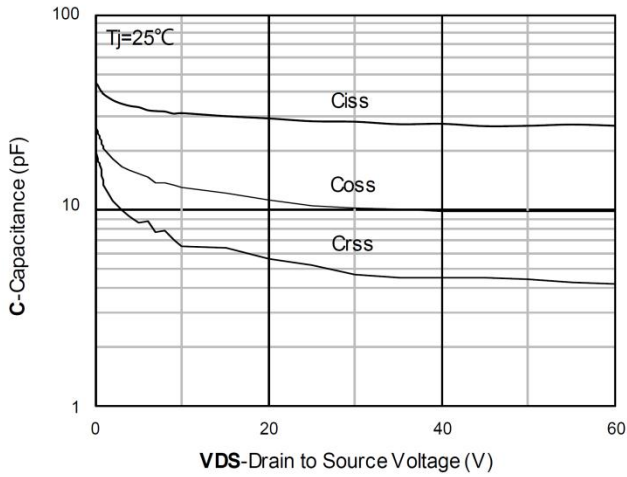


Capacitance Characteristics

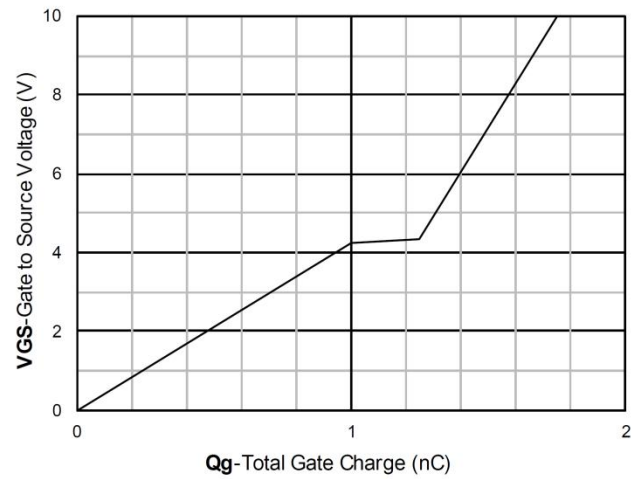


Gate Charge

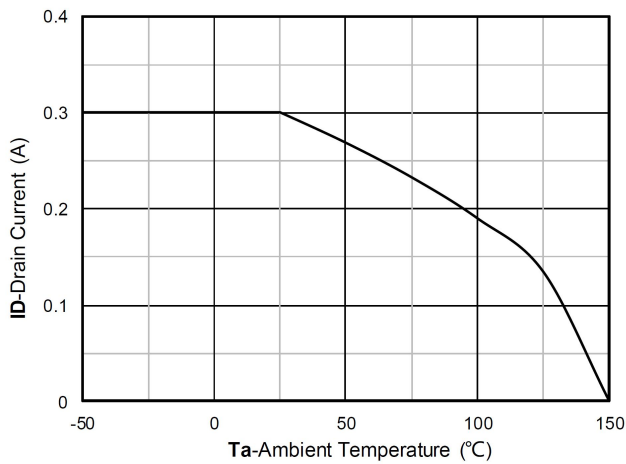


Current dissipation

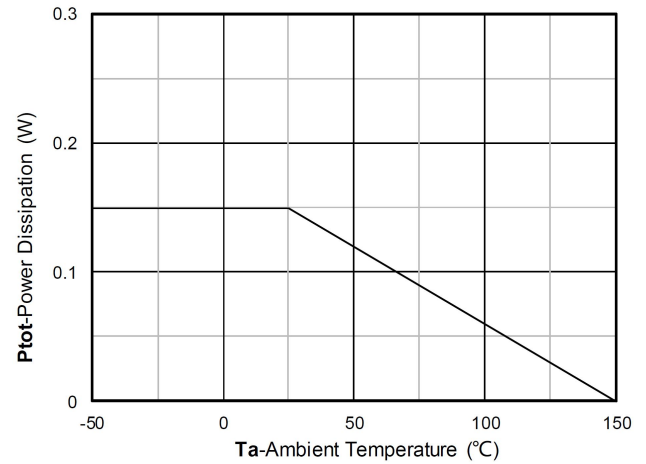


Power dissipation

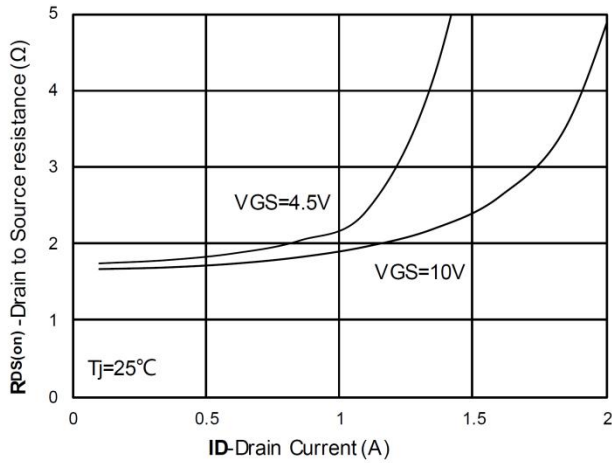


$R_{DS(on)}$ VS Drain Current

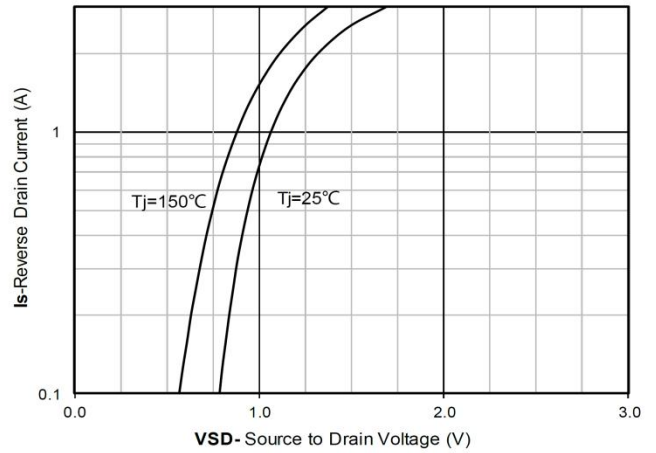


Forward characteristics of reverse diode

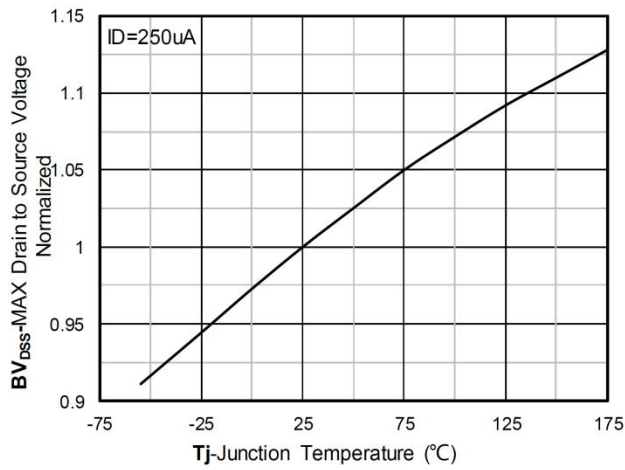


Normalized breakdown voltage

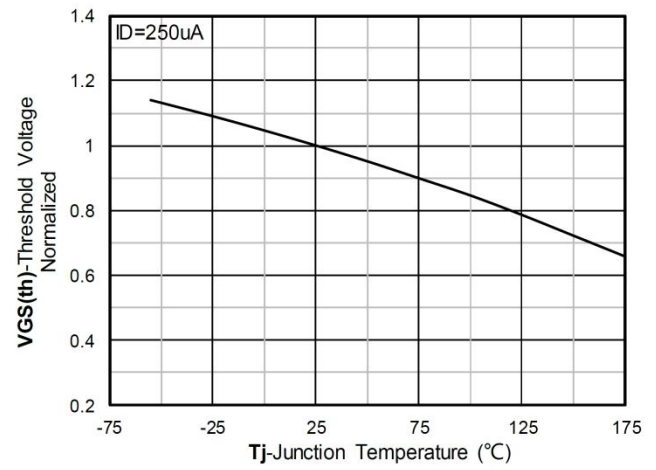

Normalized Threshold voltage

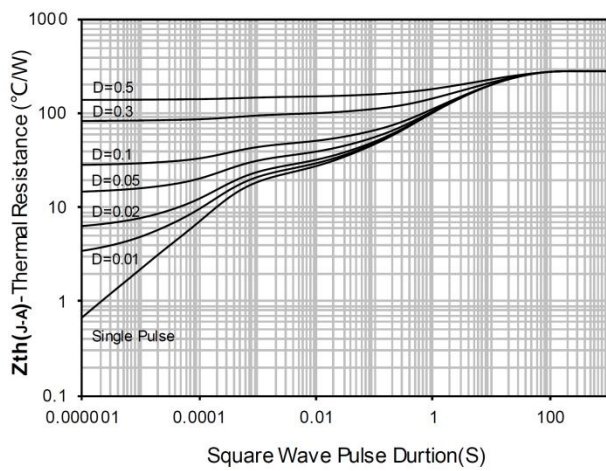


Maximum Transient Thermal Impedance

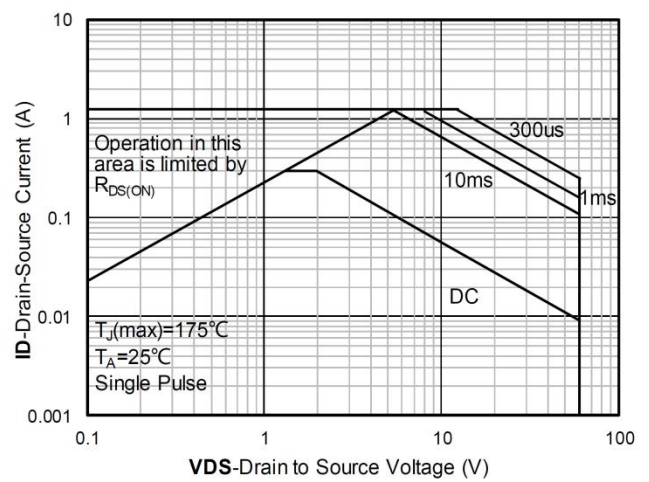

Safe Operation Area

SOT-363 Package Information

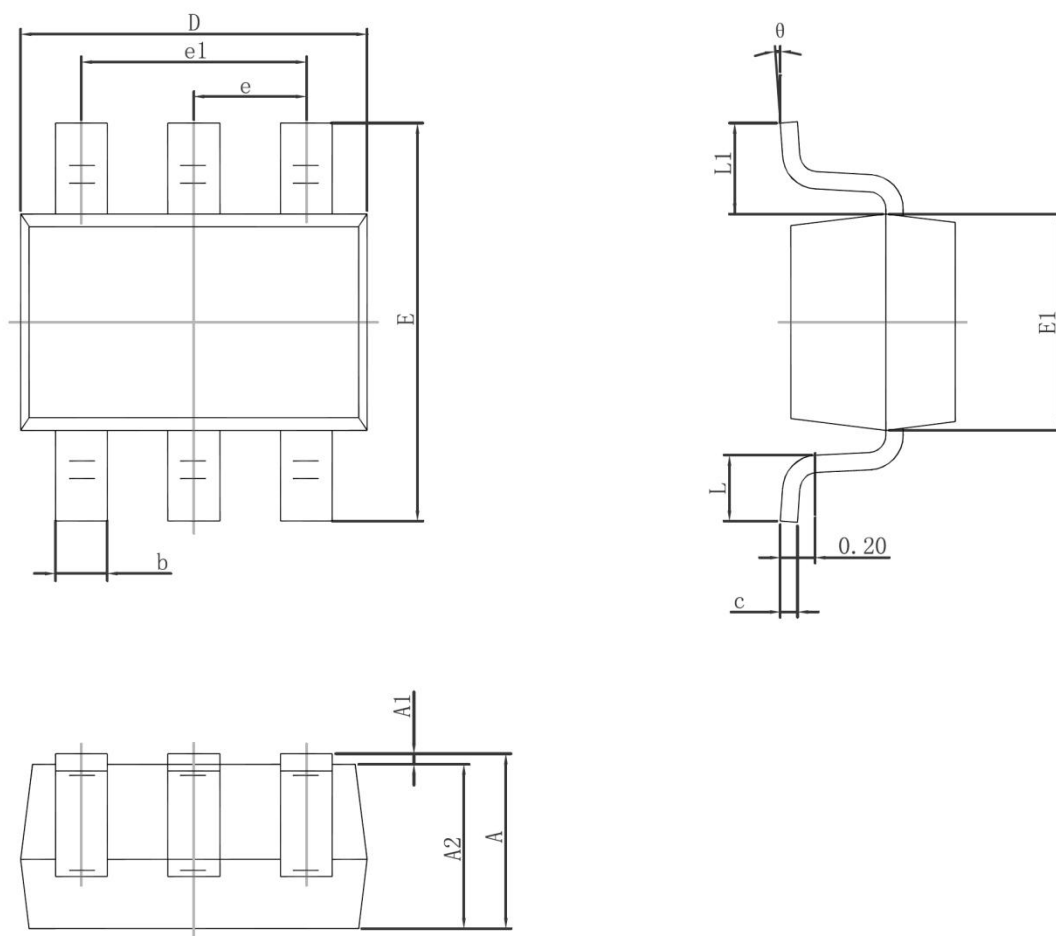

Symbol	Dimensions In Millimeters	
	Min.	Max.
A	0.90	1.10
A1	0.00	0.10
A2	0.90	1.00
b	0.15	0.35
c	0.10	0.15
D	2.00	2.20
E1	1.15	1.35
E	2.15	2.40
e	0.65 TYP.	
e1	1.20	1.40
L	0.26	0.46