




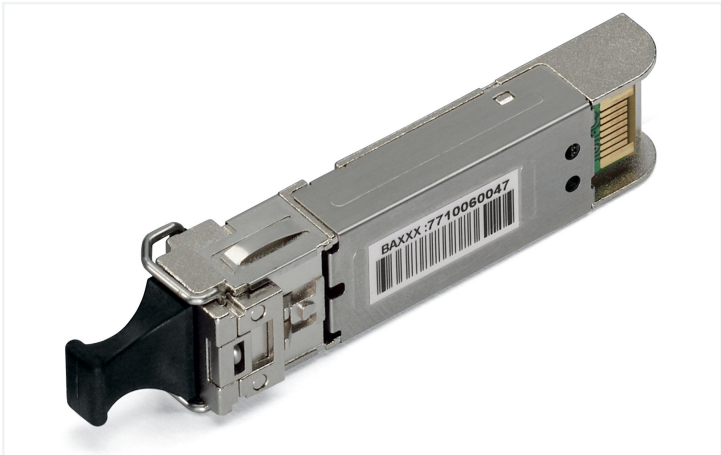


Color: ■ silver-colored

Similar to illustration

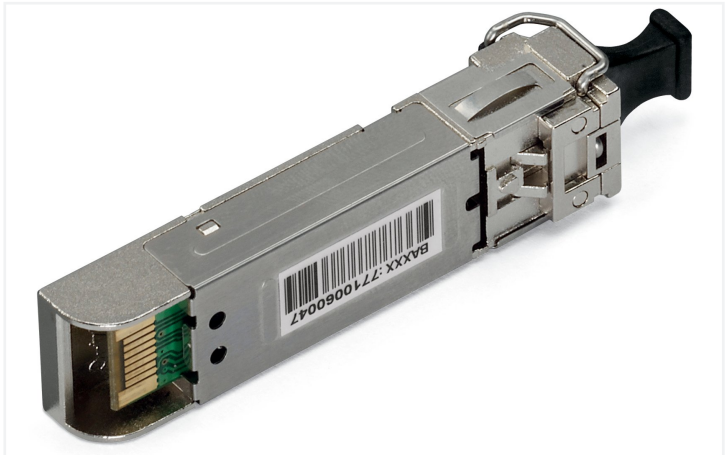

Similar to illustration

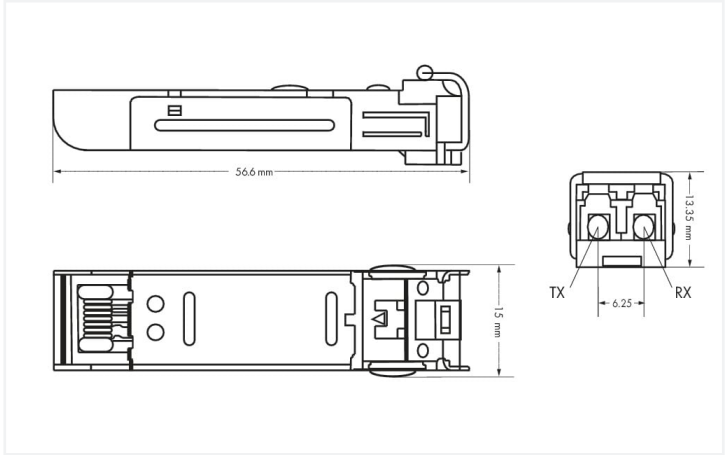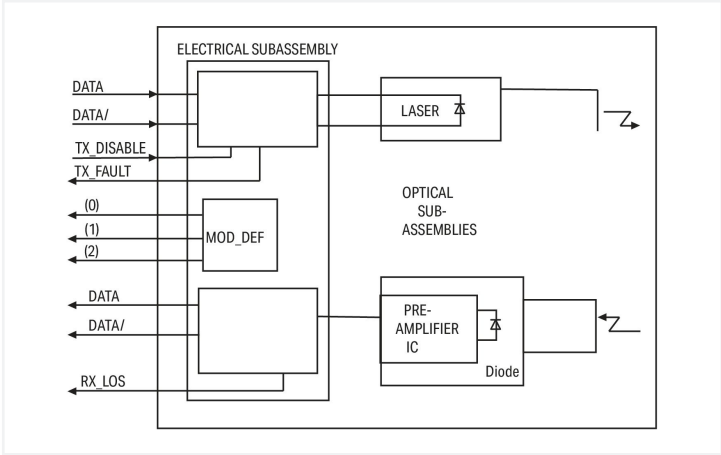

Dimensions in mm

- Features:**
- Duplex LC optical connector
 - Small Form-Factor Pluggable (SFP) industry-standard design
 - Compliant with Fast ETHERNET standard
 - Differential LVPECL inputs and outputs
 - Power supply: 3.3 V
 - TTL signal detect indicator
 - Hot-pluggable capability

Technical data	
Optical fiber type	Multi-mode

Connection data	
Connection technology: communication/fieldbus	1 x SFP; LC fiber-optic connector
Connection requirement (permissible cable length)	2000 m
Connection requirement (permissible cable type)	Multi-mode fiber 62.5/125 µm, 50/125 µm; Wavelength: 1310 nm



Physical data		
Width		13.4 mm / 0.528 inches
Height		13.3 mm / 0.524 inches
Depth		56.6 mm / 2.228 inches

Mechanical data		
Weight		24 g
Color		silver-colored

Environmental requirements		
Ambient temperature (operation)		-40 ... +70 °C
Ambient temperature (storage)		-40 ... +80 °C
Fire load		0 MJ

Commercial data		
eCl@ss 10.0		19-17-01-30
eCl@ss 9.0		19-17-01-06
ETIM 9.0		EC000309
ETIM 8.0		EC000309
PU (SPU)		1 pcs
Packaging type		Box
Country of origin		TW
GTIN		4045454635404
Customs tariff number		85176200000

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Approvals / Certificates

General approvals		
		
Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03083
KC National Radio Research Agency	Article 58-2, Clause 3	MSIP-REM-W43-SFP852

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
852-201/107-002

↓

Documentation

System Description

Industrial Switches – General Product Information
pdf
1873.93 KB

↓

Bid Text

852-201/107-002
09.03.2018
doc
25.50 KB

↓

852-201/107-002
19.02.2019
xml
3.81 KB

↓

ausschreiben.de
852-201/107-002

↓

CAD/CAE-Data

CAE data

EPLAN Data Portal
852-201/107-002

↓

WSCAD Universe
852-201/107-002

↓