


DIMENSIONS:	
A	3.750" ± 0.063
B	3.938" ± 0.125
C	3.125" ± 0.063
D	3.125" ± 0.063
E	3.000" ± 0.063
F	3.562" ± 0.063
G	0.203" X 0.375" 0.015

LUG 
 10mH $\pm 15\%$
 10A DC
 600VDC MAX. Op.
LUG 

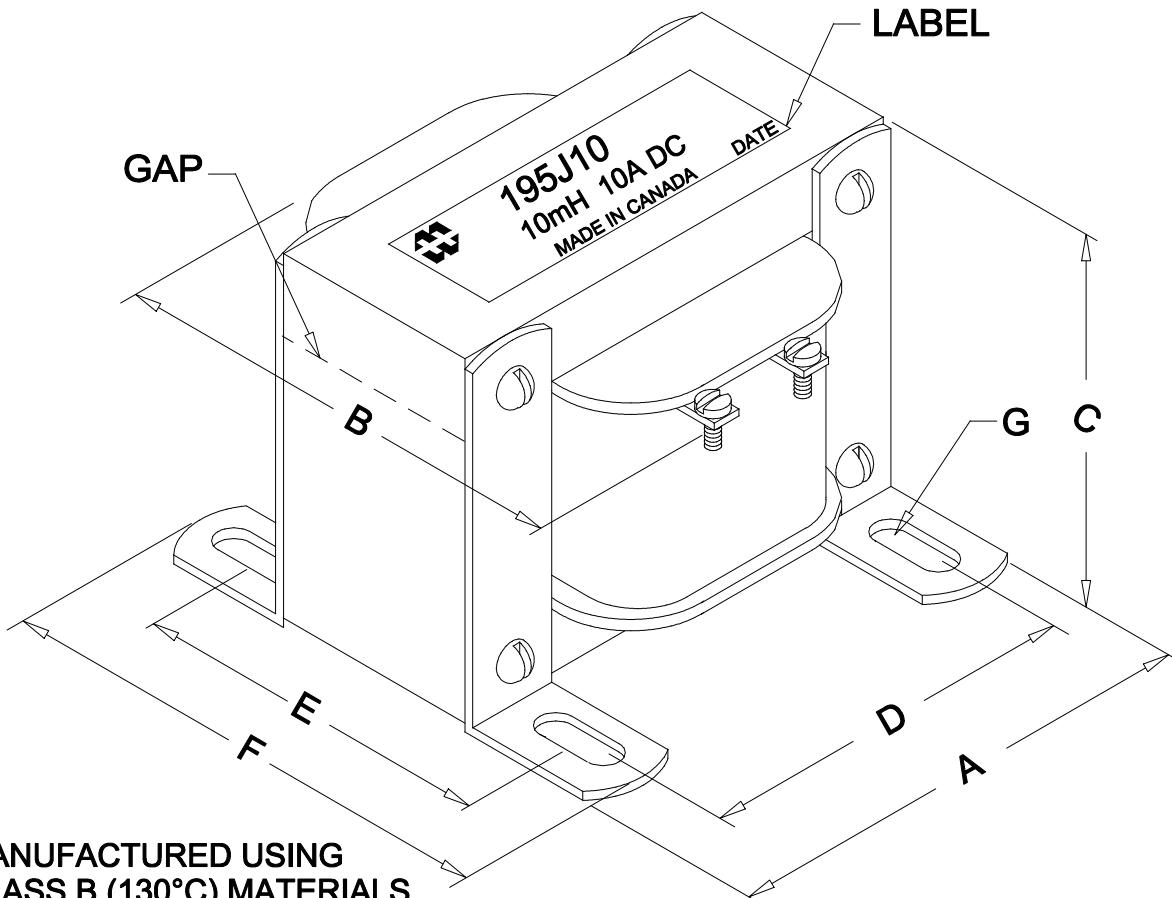

MANUFACTURED USING
CLASS B (130°C) MATERIALS.

RoHS COMPLIANT
OPERATING TEMP.:

-40°C TO 105°C

STORAGE TEMP.:

-40°C TO 85°C

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
INDUCTANCE	@ 5V, 60Hz, 10A DC, LUG - LUG	10mH $\pm 15\%$
DCR	@ 20°C, LUG - LUG =	0.087 Ω $\pm 15\%$
HIPOT	PRIMARY - CORE	2500V, 60Hz, 1 SEC

HAMMOND
MANUFACTURINGTM

ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5
PH # (519) 886-6181
FAX # (519) 886-9540

TITLE				DWG. BY
NO	DATE	REVISION	C.I.	
0	08/14/15	RELEASED.		CORINA ILIE
				DATE
				08/14/15
				DIM IN(X)MM()

195J10