

1-1462050-6 ✓ ACTIVE

Axicom | Axicom HF3

TE Internal #: 1-1462050-6

RF Relay, DC, Monostable, 1 Form C SPDT-CO, 2 A Contact Rating,  
5 VAC Coil Voltage, 250 VAC Contact Voltage, 220 VDC Contact  
Voltage, Axicom HF3

[View on TE.com >](#)



Relays & Contactors > Electromechanical Relays > Signal Relays: SMT, PCB Mount, 2 Amp



Relay & Contactor Type: **RF Relay**

Current Type: **DC**

Coil Magnetic System: **Monostable**

Contact Arrangement: **1 Form C SPDT-CO**

Contact Current Rating: **2 A**

[All Signal Relays: SMT, PCB Mount, 2 Amp \(27\)](#)

## Features

### Product Type Features

Relay & Contactor Type	RF Relay
------------------------	----------

### Configuration Features

Contact Special Features	Gull Wing
Relay Options	RF Rated
Contact Number of Poles	1
Contact Arrangement	1 Form C SPDT-CO

### Electrical Characteristics

Contact Limiting Short-Time Current	2 A
Contact Limiting Making Current	2 A
Contact Limiting Continuous Current	2 A
Contact Limiting Breaking Current	2 A
Insulation Initial Dielectric Between Open Contacts	600 Vrms

Contact Switching Voltage (Max)	250 VAC
Voltage Standing Wave Ration (HF Parameter)	1.07db @ 100MHz, 1.45db @ 900MHz
Coil Resistance	145 Ω
Insulation Initial Resistance	1000000 MΩ
Contact Current Rating	2 A
Coil Voltage Rating	5 VAC
Contact Voltage Rating	220 VDC
Coil Power Rating DC	.14 W
Insulation Initial Dielectric Between Contacts & Coil	1000 Vrms

#### Signal Characteristics

Isolation (HF Parameter)	-40dB @ 3GHz, -72dB @ 900MHz, -80dB @ 100MHz
Insertion Loss (HF Parameter)	-.03dB @ 100MHz, -.12dB @ 900MHz, -.4dB @ 3GHz

#### Body Features

	2.5 oz
Enclosure Type	Flux Resistant Automatic Soldering & Washable

#### Contact Features

Contact Plating Material	Gold
Contact Material	Nickel

#### Termination Features

Main Termination & Connection Type	PCB SMT
Coil Termination & Connection Type	PCB SMT

#### Mechanical Attachment

Product Mount Type	Board Mount
--------------------	-------------

#### Dimensions

Product Width	7.2 mm[.283 in]
Product Length	14.6 mm[.574 in]
Product Height	9.1 mm[.358 in]

#### Usage Conditions

Environmental Category of Protection	RTIII
Environmental Ambient Temperature (Max)	85 °C[85 °F]

## Operation/Application

Current Type	DC
Coil Magnetic System	Monostable

## Packaging Features

Packaging Method	Box & Carton, Reel
------------------	--------------------

## Other

Coil Power Rating Class	.05 – .3 W
Contact Current Class	0 – 2 A
Environmental Ambient Temperature Class	70 – 85 °C
Height Class (Mechanical)	9 – 10 mm
Length Class (Mechanical)	14 – 16 mm
Width Class (Mechanical)	6 – 8 mm

## Product Compliance

For compliance documentation, visit the product page on [TE.com](http://TE.com)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 245°C


### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



## Also in the Series | Axicom HF3

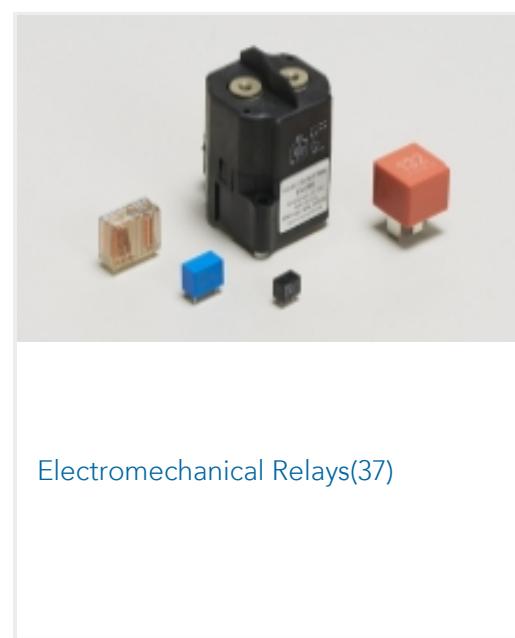

## Customers Also Bought



## Documents

### CAD Files

Customer View Model

[ENG\\_CVM\\_1462050-2\\_A6.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_1462050-2\\_A6.3d\\_stp.zip](#)

English

Customer View Model

[ENG\\_CVM\\_1462050-2\\_A6.2d\\_dxf.zip](#)

English

### 3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

## Datasheets & Catalog Pages

### [Axicom Signal and High Frequency Relays \(RF Switches\) APPLICATION NOTE #2](#)

English

### [HF3 Relay Datasheet](#)

English

## Product Specifications

### [Definitions General Purpose Relays](#)

English