


1. 产品尺寸图Product Dimension Drawing

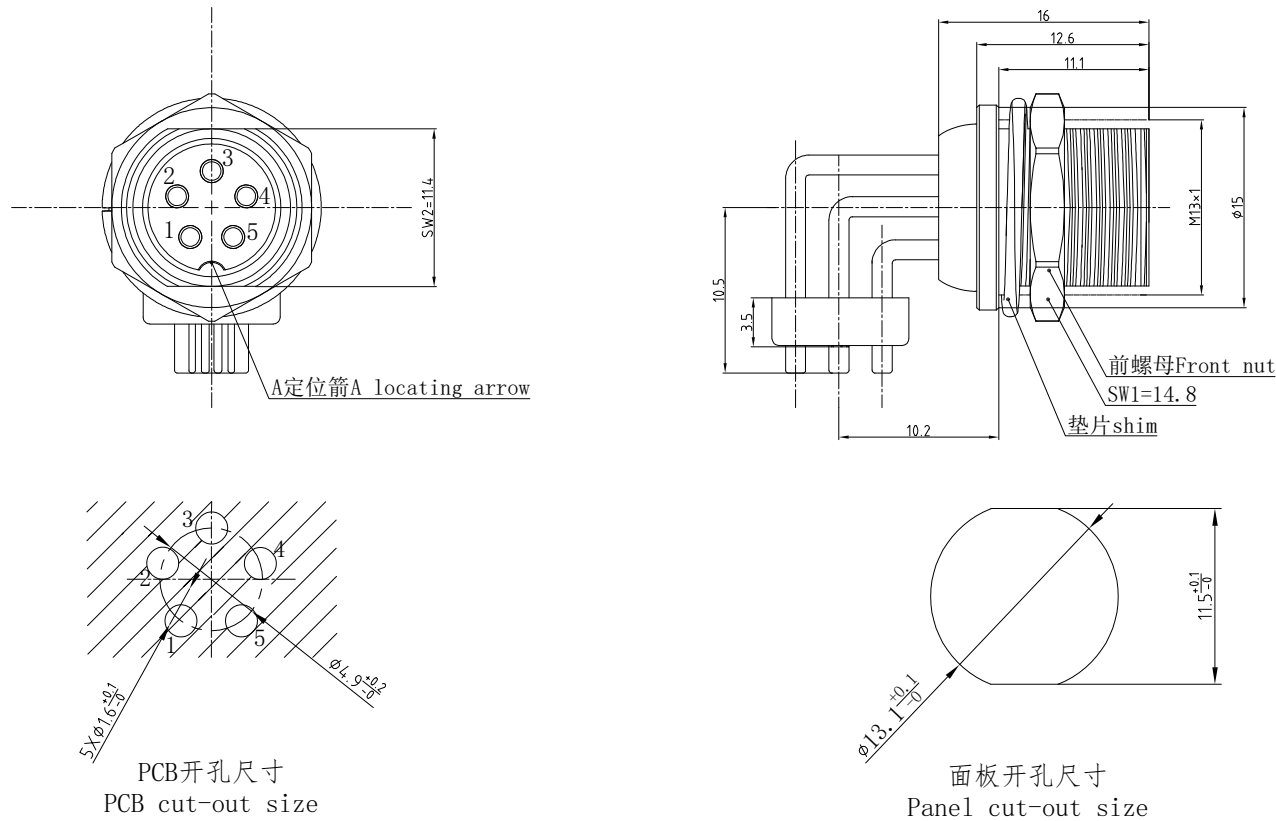

2. 产品电器参数Product electrical parameters

|                                             |                 |
|---------------------------------------------|-----------------|
| 防护等级 (Ingress protection)                   | IP50            |
| 插拔测试 (Plugging and unplugging test)         | <500次           |
| 产品耐温 (The product is temperature resistant) | -20° C / +85° C |
| 盐雾腐蚀 (Salt Spray Corrosion)                 | >48 hr          |
| 额定电流Current rating                          | 5A              |
| 额定电压 (Rated voltage)                        | 125V            |
| 工作电压 (AC.V)                                 | 200             |
| Operating voltage (AC.V)                    | 1500            |
| 耐电压 (AC.V)                                  | 1500            |
| Withstand voltage (AC.V)                    | 1500            |
| 绝缘阻抗 (mΩ) DC500V                            | 1500            |
| Insulation Resistance (mΩ)DC500V            | 5               |
| 绝缘电阻 (mΩ) DC1A                              | 5               |
| Insulation Resistance (mΩ)DC1A              |                 |

3. 环境及表面处理产品特性Environmental and surface treatment product characteristics

|                          |                                |
|--------------------------|--------------------------------|
| 外壳材料 Housing material    | 锌合金镀镍Zinc alloy nickel plating |
| 绝缘体材料 Insulator material | 橡胶黑木Rubber black wood          |
| 触体材料 Contact material    | 黄铜镀银Brass silver-plated        |

1: 连接器组装生产所有公差通常为0.1mm,2: 插座直接拧入螺纹孔中, 螺纹 +0.05mm  
1: All tolerances are usually 0.1mm for connector assembly production, 2: The socket is screwed directly into the threaded hole, the thread is +0.05mm

TONGRUIJOIN

东莞市通瑞电子科技有限公司  
TongRuiJoin  
Dongguan Tongrui Electronic Technology Co., Ltd  
www.CLtfre.com

GX12弯针板接插座GX12  
curved pin board socket

单芯图纸Single-core drawings

单位unit:mm 修改revise:A0

视图view:

型号Model  
AD, GZ, GX12, 305, NYLV