
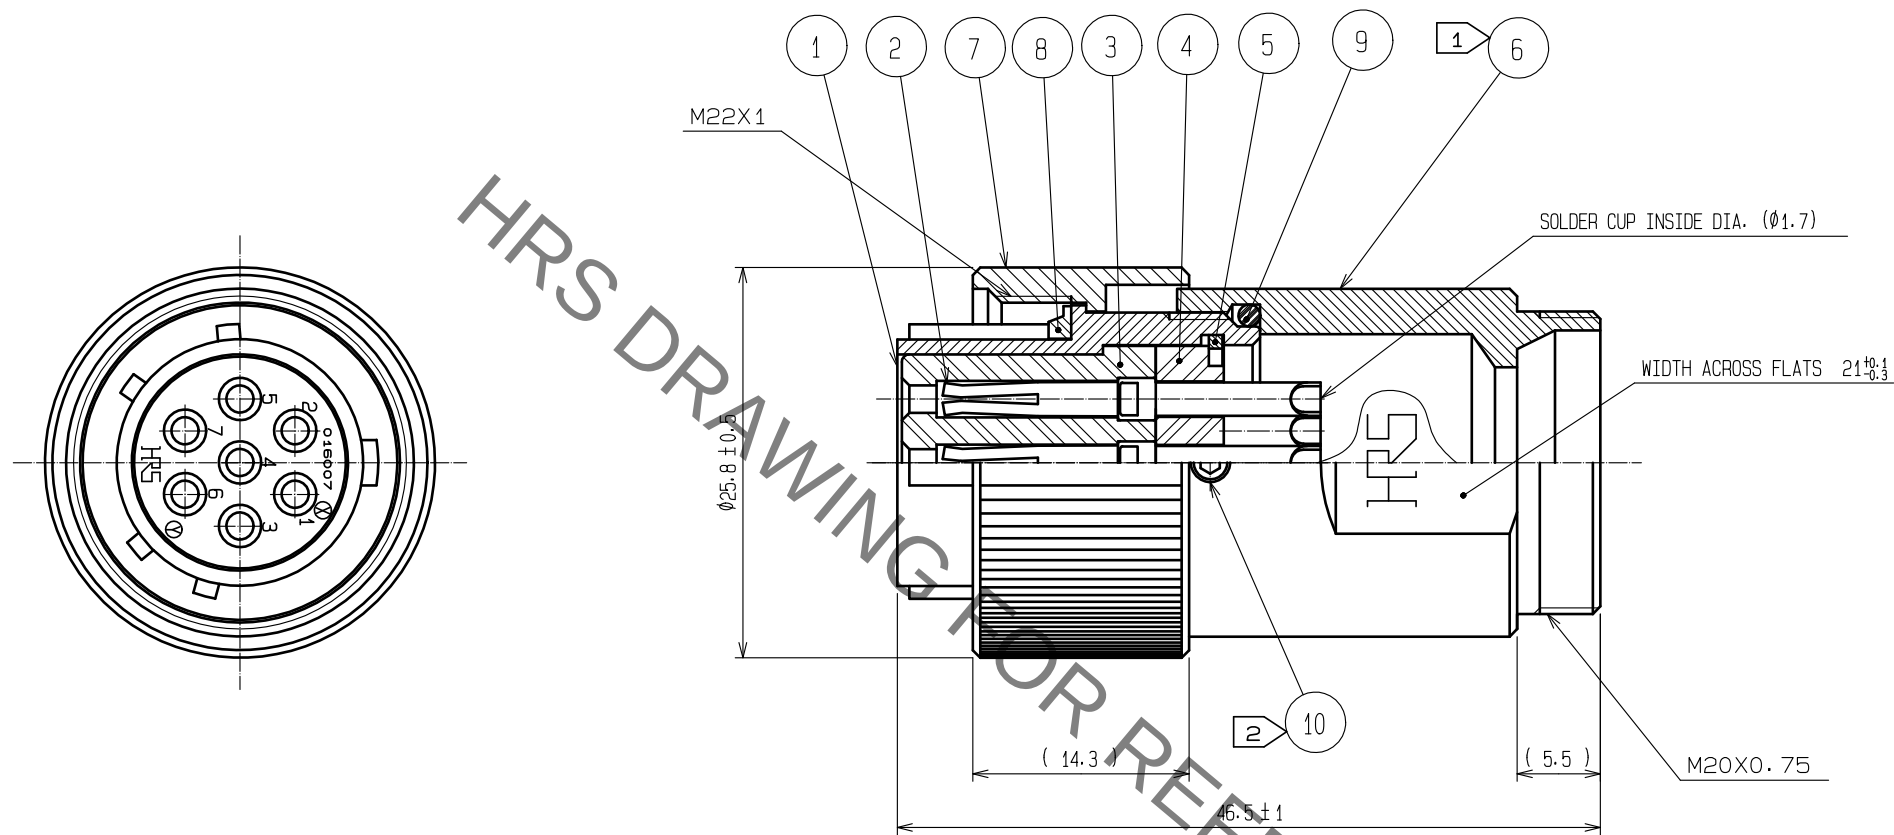


Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



- NOTES
- 1 THE RECOMMENDED CLAMP TORQUE OF REF.NO. (6) TO BE 3 TO 3.5 N·m.
 - 2 THE RECOMMENDED CLAMP TORQUE OF REF.NO. (10) TO BE 0.2 TO 0.25 N·m.
LOCTITE 243, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF.NO. (10) FROM LOOSENING.
 - 3 ROTATION EXAMPLES OF REF. NOS. (1) AND (6) ARE SHOWN.
 - 4 THIS PRODUCT TO BE USED WITH CABLECLAMP, JR16WCC-*.
* DESIGNATE DIAMETER OF APPLICABLE CABLE.
 - 5 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER,
DEPENDING ON THE CABLE STRUCTURE.
PLEASE CONFIRM BEFORE THE USE.

5	PHOSPHOR BRONZE	NICKEL PLATING	10	STAINLESS STEEL	HEX 1.27					
4	PHENOL-FORMALDEHYDE	(BLACK) UL94V-0	9	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)					
3	PHENOL-FORMALDEHYDE	(BLACK) UL94V-0	8	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)					
2	COPPER ALLOY	SILVER PLATING 2μm min.	7	BRASS	BLACK CHROME PLATING					
1	ALUMINUM ALLOY	BLACK CHROME PLATING	6	BRASS	BLACK CHROME PLATING					
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS				
UNITS mm				SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED :HY. KOBAYASHI		18. 02. 26		DRAWING NO.		EDC-110570-31-00		
		CHECKED :HY. KOBAYASHI		18. 02. 26		PART NO.		JR16WP-7S(31)		
		DESIGNED :TH. KAMEYA		18. 02. 23		CODE NO.		CL114-2014-7-31		
		DRAWN :TH. KAMEYA		18. 02. 23				 1/1		