


DRAWING FOR REFERENCE: This is subject to change without notice  
08/11/2012

|    |
|----|
| TO |
|    |
|    |
|    |

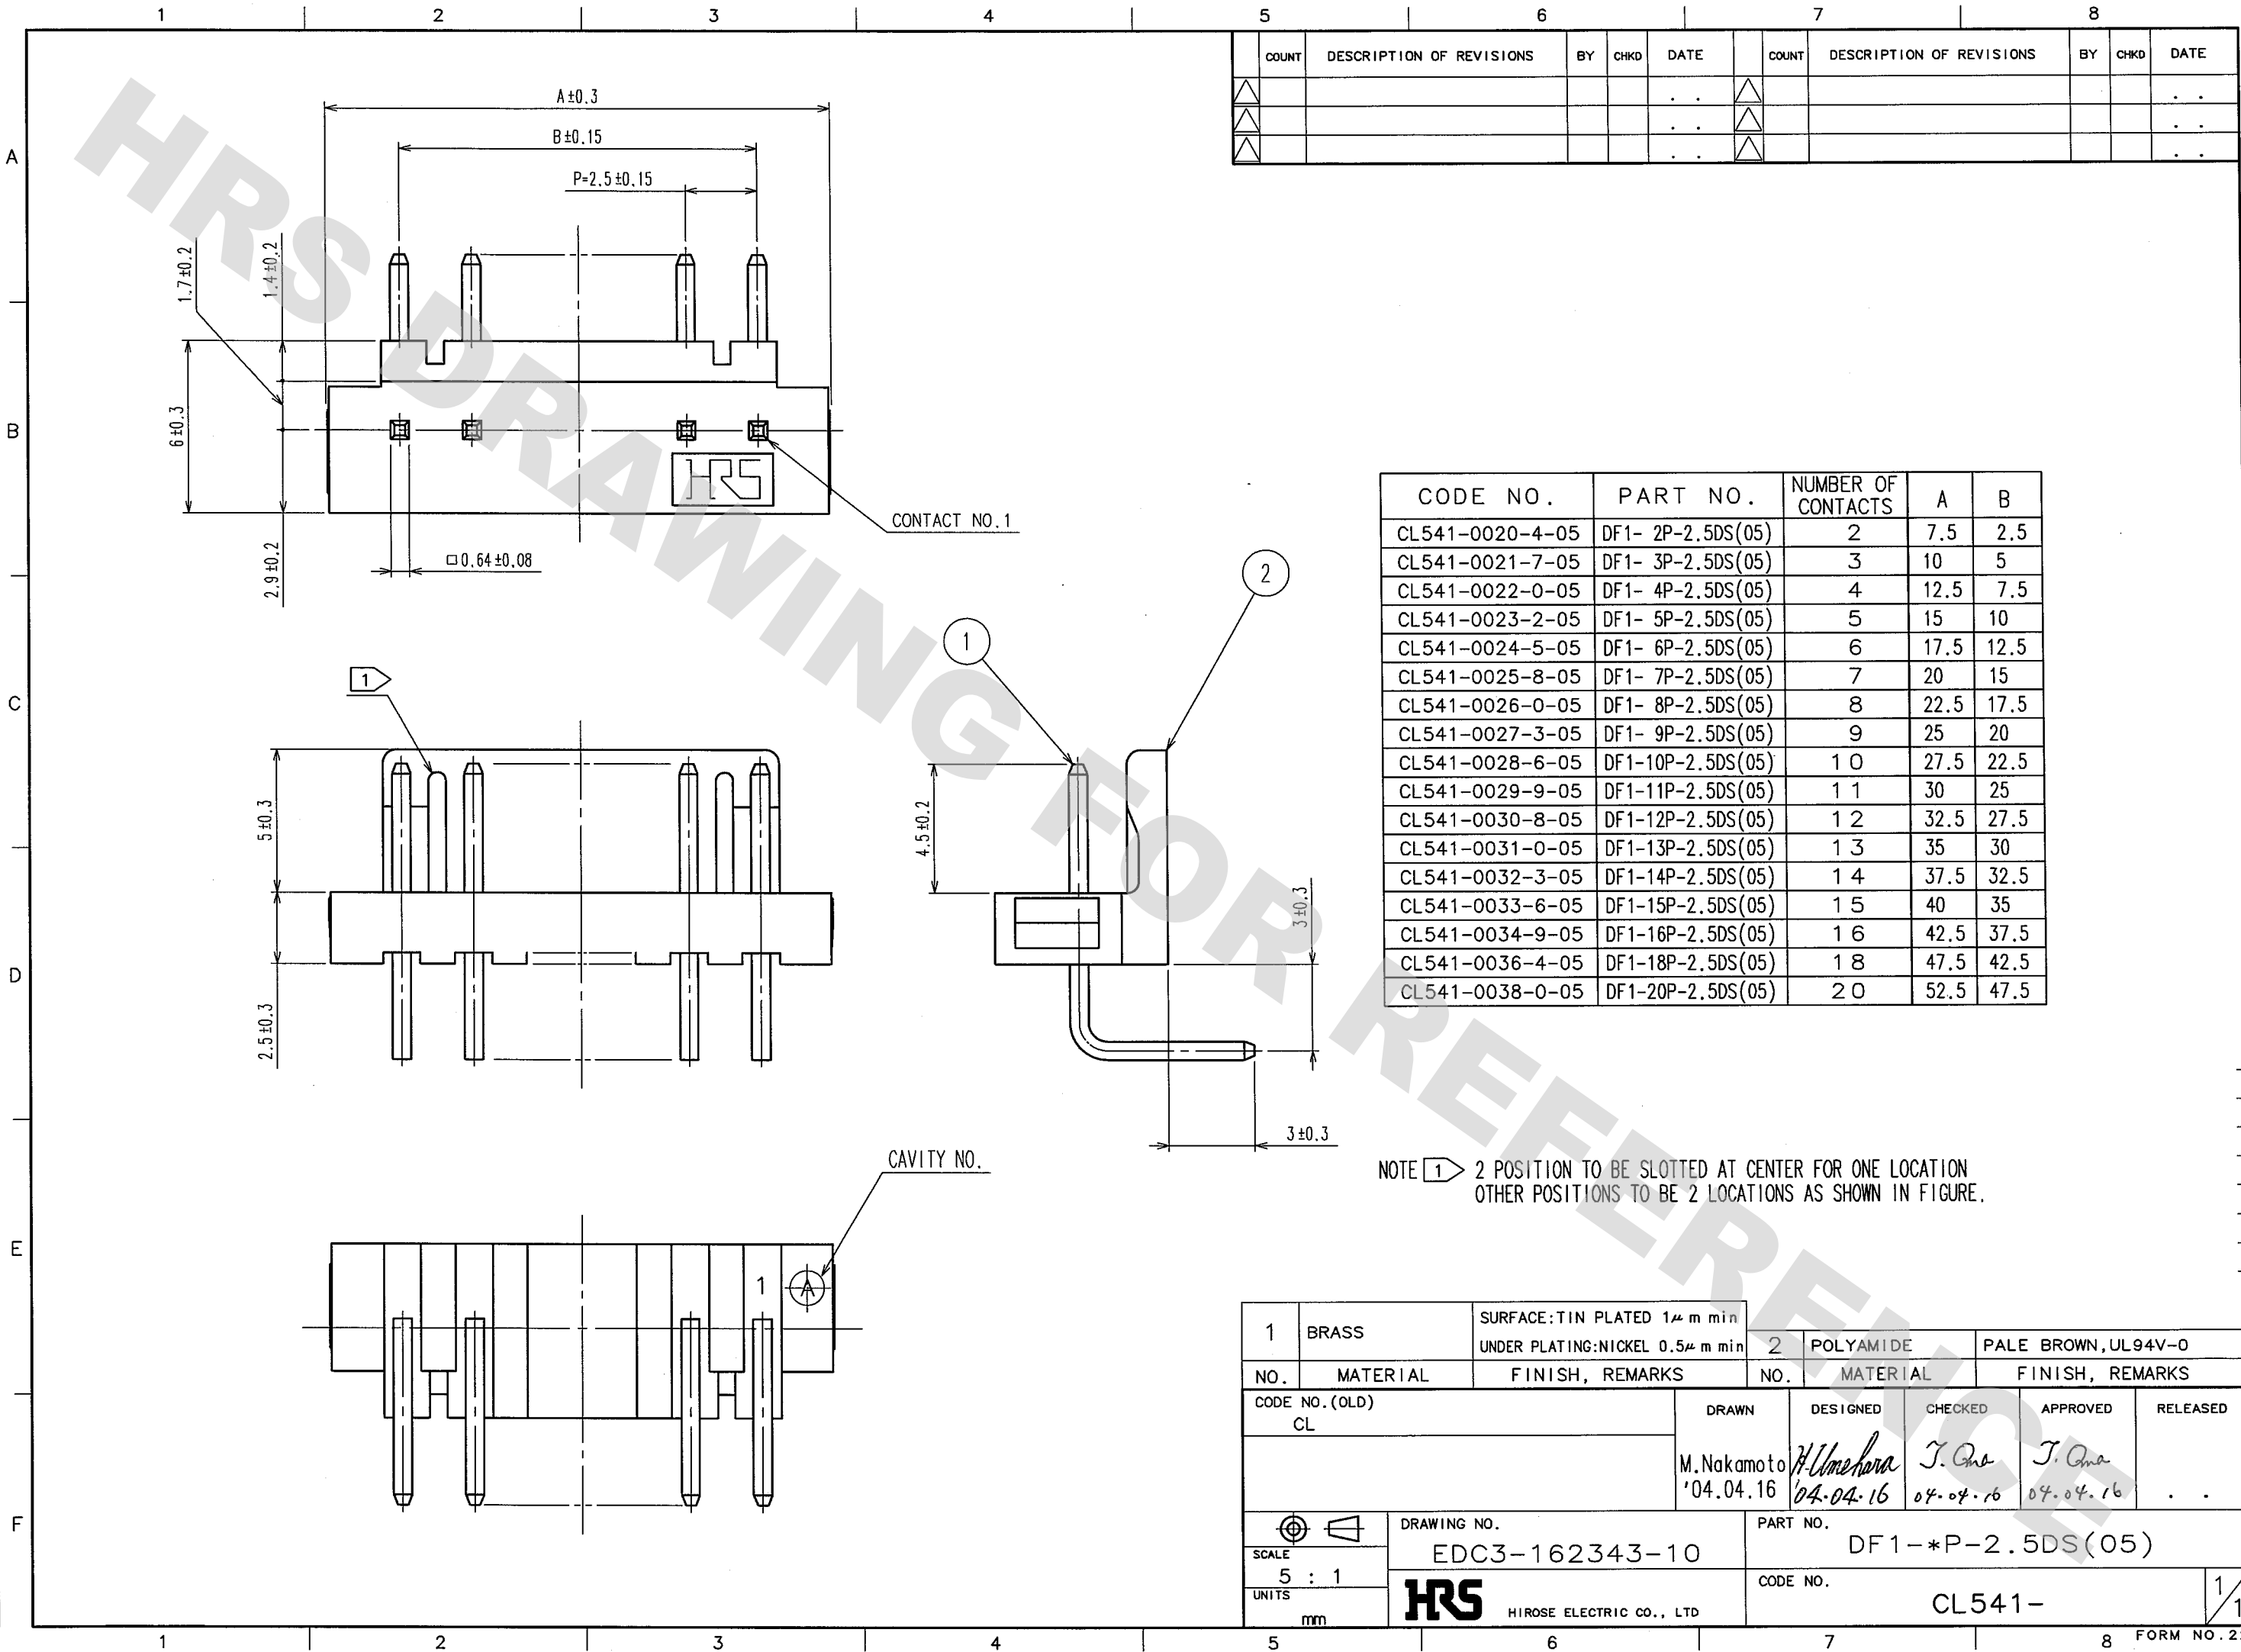

| COUNT | DESCRIPTION OF REVISIONS | BY | CHKD | DATE | COUNT | DESCRIPTION OF REVISIONS | BY | CHKD | DATE |
|-------|--------------------------|----|------|------|-------|--------------------------|----|------|------|
|       |                          |    |      |      |       |                          |    |      |      |
|       |                          |    |      |      |       |                          |    |      |      |
|       |                          |    |      |      |       |                          |    |      |      |

| CODE NO.        | PART NO.          | NUMBER OF CONTACTS | A    | B    |
|-----------------|-------------------|--------------------|------|------|
| CL541-0020-4-05 | DF1- 2P-2.5DS(05) | 2                  | 7.5  | 2.5  |
| CL541-0021-7-05 | DF1- 3P-2.5DS(05) | 3                  | 10   | 5    |
| CL541-0022-0-05 | DF1- 4P-2.5DS(05) | 4                  | 12.5 | 7.5  |
| CL541-0023-2-05 | DF1- 5P-2.5DS(05) | 5                  | 15   | 10   |
| CL541-0024-5-05 | DF1- 6P-2.5DS(05) | 6                  | 17.5 | 12.5 |
| CL541-0025-8-05 | DF1- 7P-2.5DS(05) | 7                  | 20   | 15   |
| CL541-0026-0-05 | DF1- 8P-2.5DS(05) | 8                  | 22.5 | 17.5 |
| CL541-0027-3-05 | DF1- 9P-2.5DS(05) | 9                  | 25   | 20   |
| CL541-0028-6-05 | DF1-10P-2.5DS(05) | 10                 | 27.5 | 22.5 |
| CL541-0029-9-05 | DF1-11P-2.5DS(05) | 11                 | 30   | 25   |
| CL541-0030-8-05 | DF1-12P-2.5DS(05) | 12                 | 32.5 | 27.5 |
| CL541-0031-0-05 | DF1-13P-2.5DS(05) | 13                 | 35   | 30   |
| CL541-0032-3-05 | DF1-14P-2.5DS(05) | 14                 | 37.5 | 32.5 |
| CL541-0033-6-05 | DF1-15P-2.5DS(05) | 15                 | 40   | 35   |
| CL541-0034-9-05 | DF1-16P-2.5DS(05) | 16                 | 42.5 | 37.5 |
| CL541-0036-4-05 | DF1-18P-2.5DS(05) | 18                 | 47.5 | 42.5 |
| CL541-0038-0-05 | DF1-20P-2.5DS(05) | 20                 | 52.5 | 47.5 |

NOTE 1 2 POSITION TO BE SLOTTED AT CENTER FOR ONE LOCATION  
OTHER POSITIONS TO BE 2 LOCATIONS AS SHOWN IN FIGURE.

|                               |          |                                                                |                                    |                               |                                |
|-------------------------------|----------|----------------------------------------------------------------|------------------------------------|-------------------------------|--------------------------------|
| 1                             | BRASS    | SURFACE:TIN PLATED 1μ m min<br>UNDER PLATING:NICKEL 0.5μ m min | 2                                  | POLYAMIDE                     | PALE BROWN,UL94V-0             |
| NO.                           | MATERIAL | FINISH, REMARKS                                                | NO.                                | MATERIAL                      | FINISH, REMARKS                |
| CODE NO.(OLD)<br>CL           |          | DRAWN<br>M.Nakamoto<br>'04.04.16                               | DESIGNED<br>H.Umehara<br>'04.04.16 | CHECKED<br>J.Ono<br>'04.04.16 | APPROVED<br>J.Ono<br>'04.04.16 |
| DRAWING NO.<br>EDC3-162343-10 |          | PART NO.<br>DF1-*P-2.5DS(05)                                   |                                    | CODE NO.<br>CL541-            |                                |
| SCALE<br>5 : 1                |          | UNITS<br>mm                                                    |                                    | 1/1                           |                                |
| HRS                           |          | HIROSE ELECTRIC CO., LTD                                       |                                    | FORM NO. 229                  |                                |