
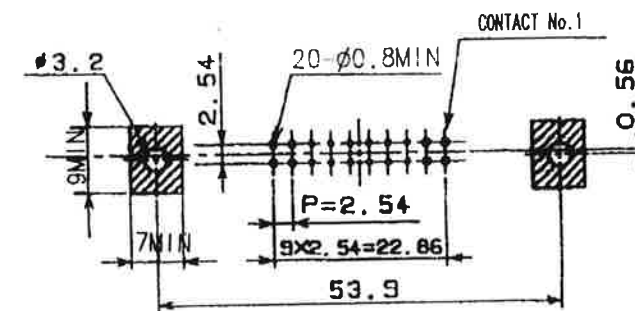


Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

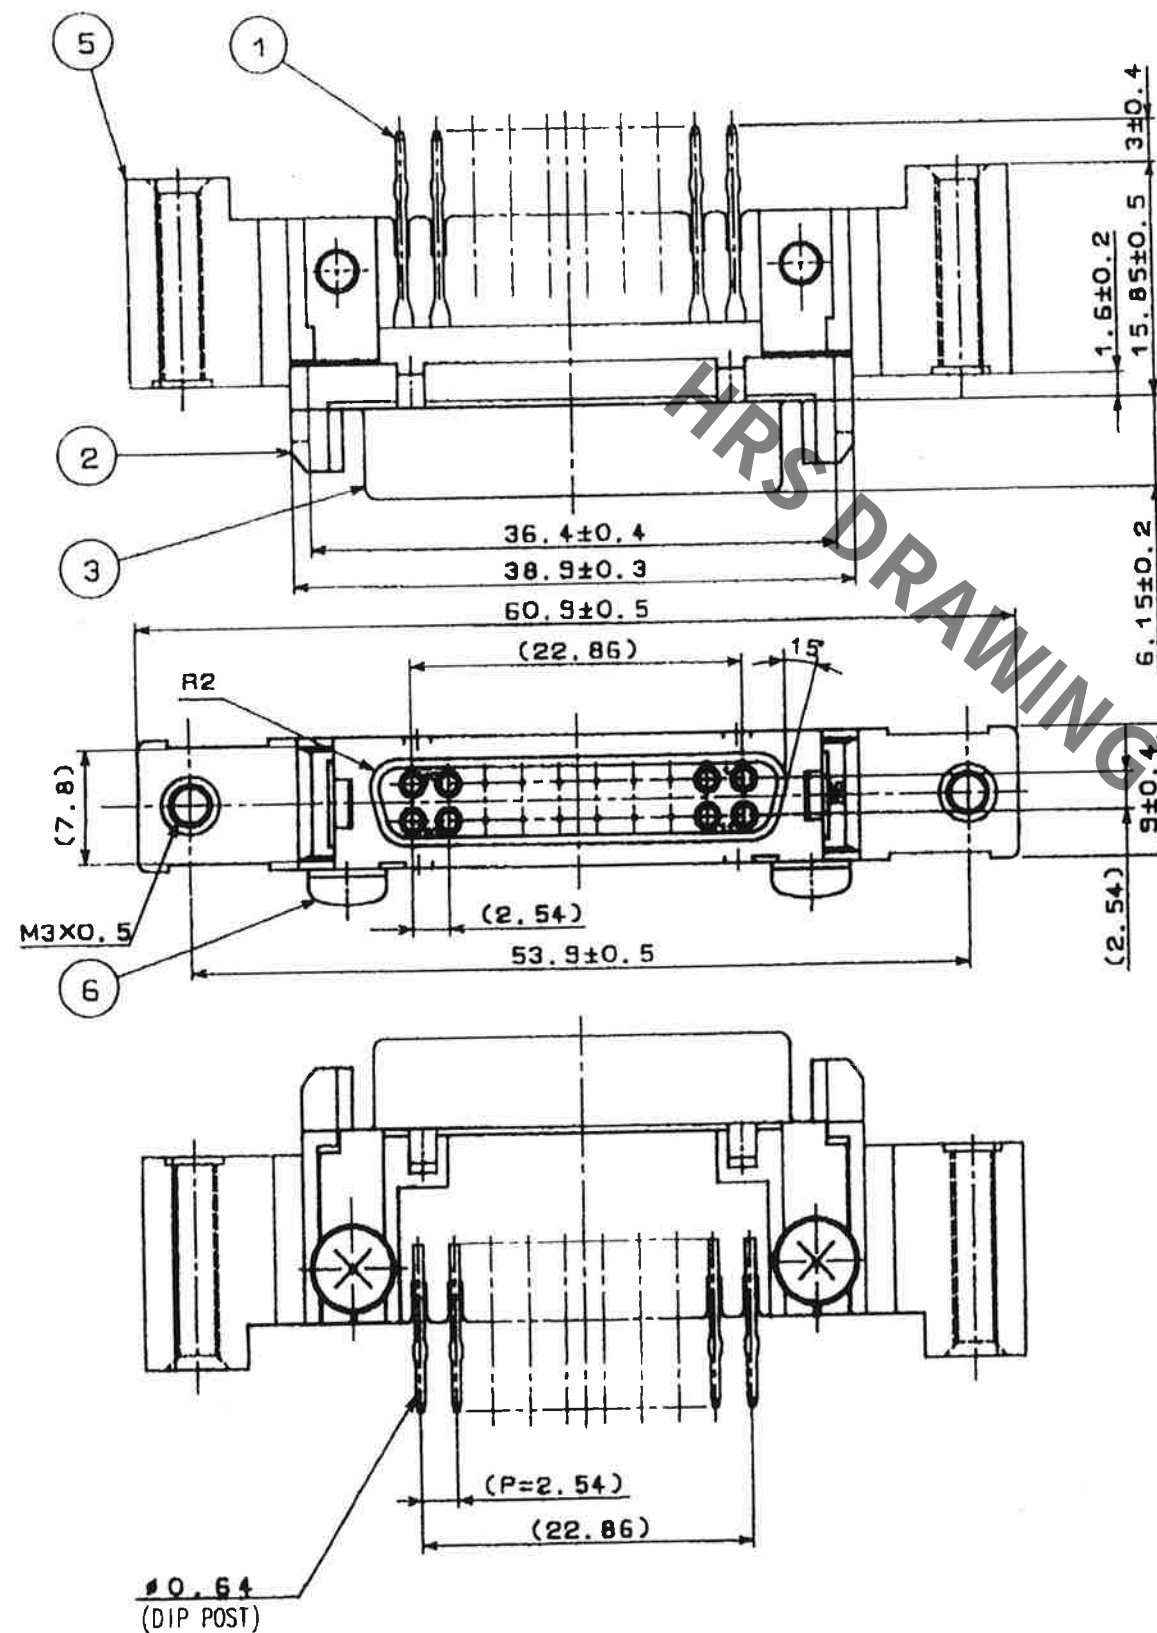

- NOTES
- THICKNESS OF PC BOARD SHALL BE 1.6mm.
 - FIG. RECOMMENDED PC BOARD HOLE PATTERN IS SHOWN
MOUNTING SIDE. HATCHING AREA SHALL BE PATTERN
PROHIBITED AREA.
 - THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

2	PBT	Black, UL94V-0	6	Steel	Nickel plating $3\mu\text{m}$ min
1	Phosphor bronze	Contact area: Gold plating $0.3\mu\text{m}$ min Lead area: Tin reflow plating $1\mu\text{m}$ min Under: Nickel plating $2\mu\text{m}$ min	5	ZDC2	Over: Nickel plating $2\mu\text{m}$ min Under: Copper plating $1\mu\text{m}$ min
			4	Phosphor bronze	Nickel plating $0.8\mu\text{m}$ min
			3	Steel	Over: Nickel plating $3\mu\text{m}$ min Under: Copper plating $6\mu\text{m}$ min
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
APPROVED: TU. TANIGUCHI 20200911		DRAWING NO. EDC-025451-70-00		PART NO. DN20B-20S(70)	
CHECKED: TU. TANIGUCHI 20200911		CODE NO. CL0225-0045-1-70			
DESIGNED: MO. SHIMOYAMA 20200911					
DRAWN: MO. SHIMOYAMA 20200911					