
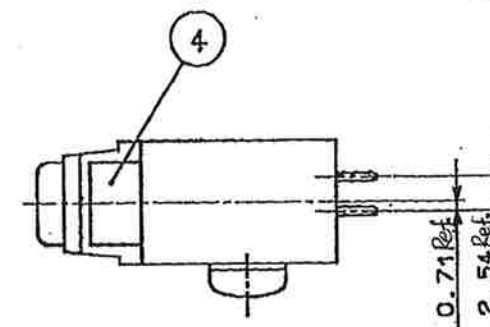
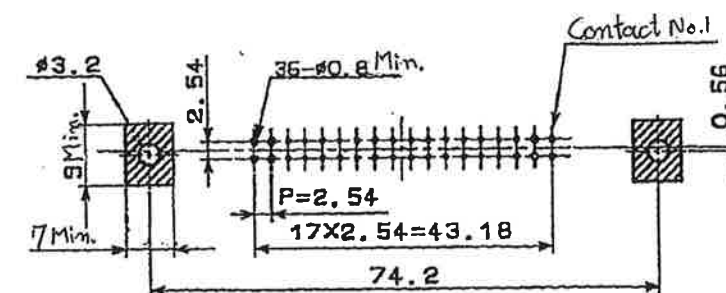



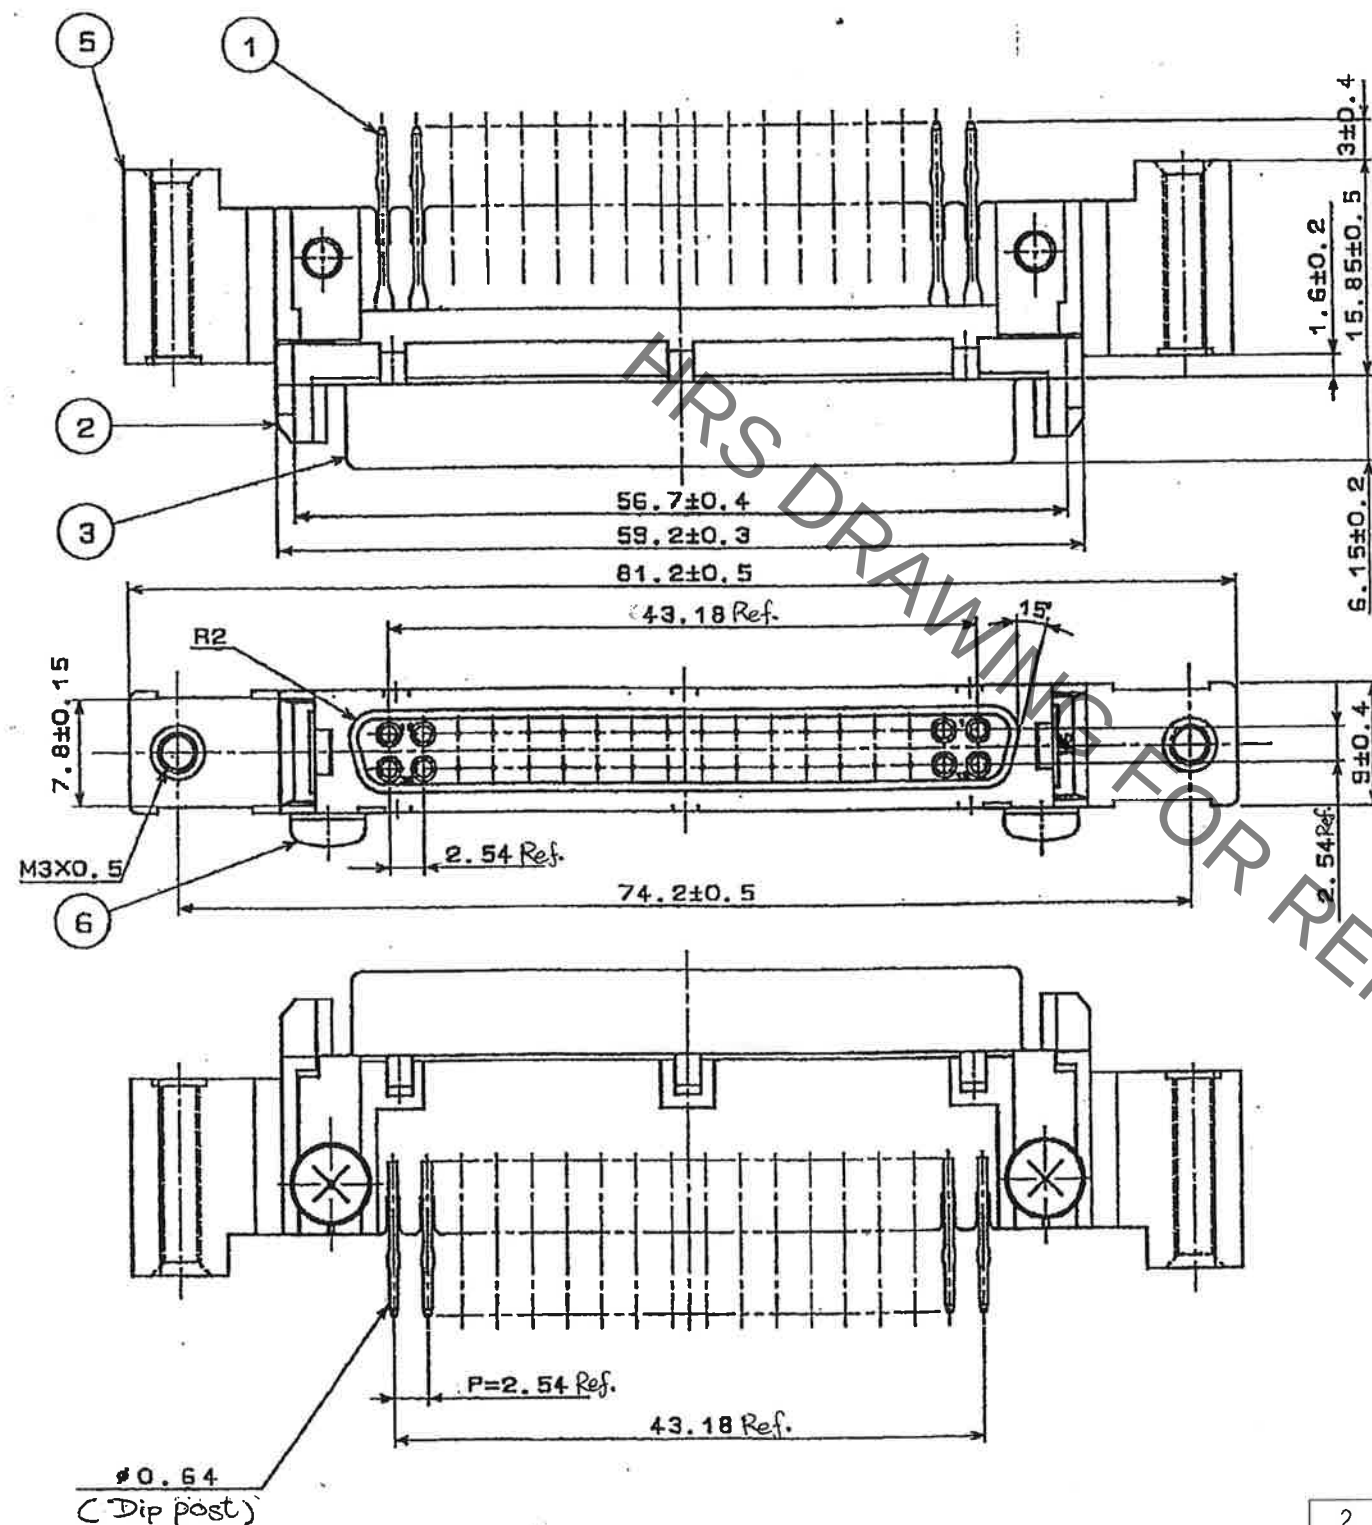

Note

1. Thickness of PCB shall be 1.6 mm.
2. Hatching area  shall be pattern prohibited area.

		6		Steel	Nickel plating 3μm min					
2		PBT	5		ZDC2	Over:Nickel plating 2μm min Under:Coper plating 1μm min				
1		Phosphor bronze	4		Phosphor bronze	Nickel plating 0.8μm min				
			3		Steel	Over:Nickel plating 3μm min Under:Copper plating 6μm min				
NO.		MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS			
UNITS mm			SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED • TU.TANIGUCHI 20200728			DRAWING NO.		EDC-025453-70-00			
		CHECKED • TU.TANIGUCHI 20200728			PART NO.		DN20B-36S(70)			
		DESIGNED • MO. SHIMOYAMA 20200728			CODE NO.		CL0225-0047-7-70			
		DRAWN • MO. SHIMOYAMA 20200728					 1			