



# EVQ8633A-L-01A

## High Efficiency, 12A, 16V Synchronous Step-down Converter Evaluation Board

### DESCRIPTION

The EVQ8633A-L-00A is an evaluation board for the MPQ8633A, a high efficiency, monolithic, synchronous step-down converter.

The EV board can deliver 12A continuous load current over a wide operating input range. High efficiency can be achieved over a wide output current load range.

The MPQ8633A adopts internally compensated constant-on-time (COT) control mode that provides fast transient response and eases loop stabilization.

This EV board can be turned on or off via a remote ON/OFF input (EN) that is referenced to ground. This input is compatible with popular logic devices.

### ELECTRICAL SPECIFICATION

Parameter	Symbol	Value	Units
Input Voltage	$V_{IN}$	8-16	V
Output Voltage	$V_{OUT}$	1.2	V
Output Current	$I_{OUT}$	12	A


### FEATURES

- Wide Input Voltage Range from 2.7V:
  - 2.7V to 16V with External 3.3V VCC Bias
  - 4V to 16V with Internal VCC Bias or External 3.3V Bias
- Differential Output Voltage Remote Sense
- Programmable Accurate Current Limit Level
- 12A Output Current
- Low  $R_{DS(ON)}$  Integrated Power MOSFETs
- Proprietary Switching Loss Reduction Technique
- Adaptive COT for Ultrafast Transient Response
- Stable with Zero-ESR Output Capacitor
- 0.5% Reference Voltage Over 0°C to +70°C Junction Temperature Range
- 1% Reference Voltage Over -40°C to +125°C Junction Temperature Range
- Selectable Pulse-Skip or Forced-CCM Operation
- Excellent Load Regulation
- Output Voltage Tracking
- Output Voltage Discharge
- PGOOD Active Clamped Low Level during Power Failure
- Programmable Soft Start Time from 1ms
- Pre-Bias Start up
- Selectable Switching Frequency of 600kHz, 800kHz and 1000kHz
- Non-latch OCP, UVP, UVLO, Thermal Shutdown, and Latch-off for OVP
- Output Adjustable from 0.6V to 90%\* $V_{IN}$ , Up to 5.5V max.
- Available in a QFN3X4 mm Package

### APPLICATIONS


- Telecom System and Networking Systems
- Servers
- Base Stations

All MPS parts are lead-free and adhere to the RoHS directive. For MPS green status, please visit MPS website under Products, Quality Assurance page. "MPS" and "The Future of Analog IC Technology" are registered trademarks of Monolithic Power Systems, Inc.

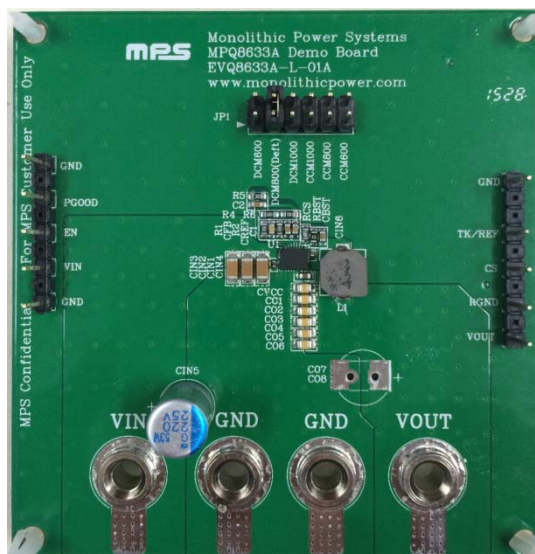

Board Number	MPS IC Number
EVQ8633A-L-01A	MPQ8633A

## EVALUATION BOARD SCHEMATIC

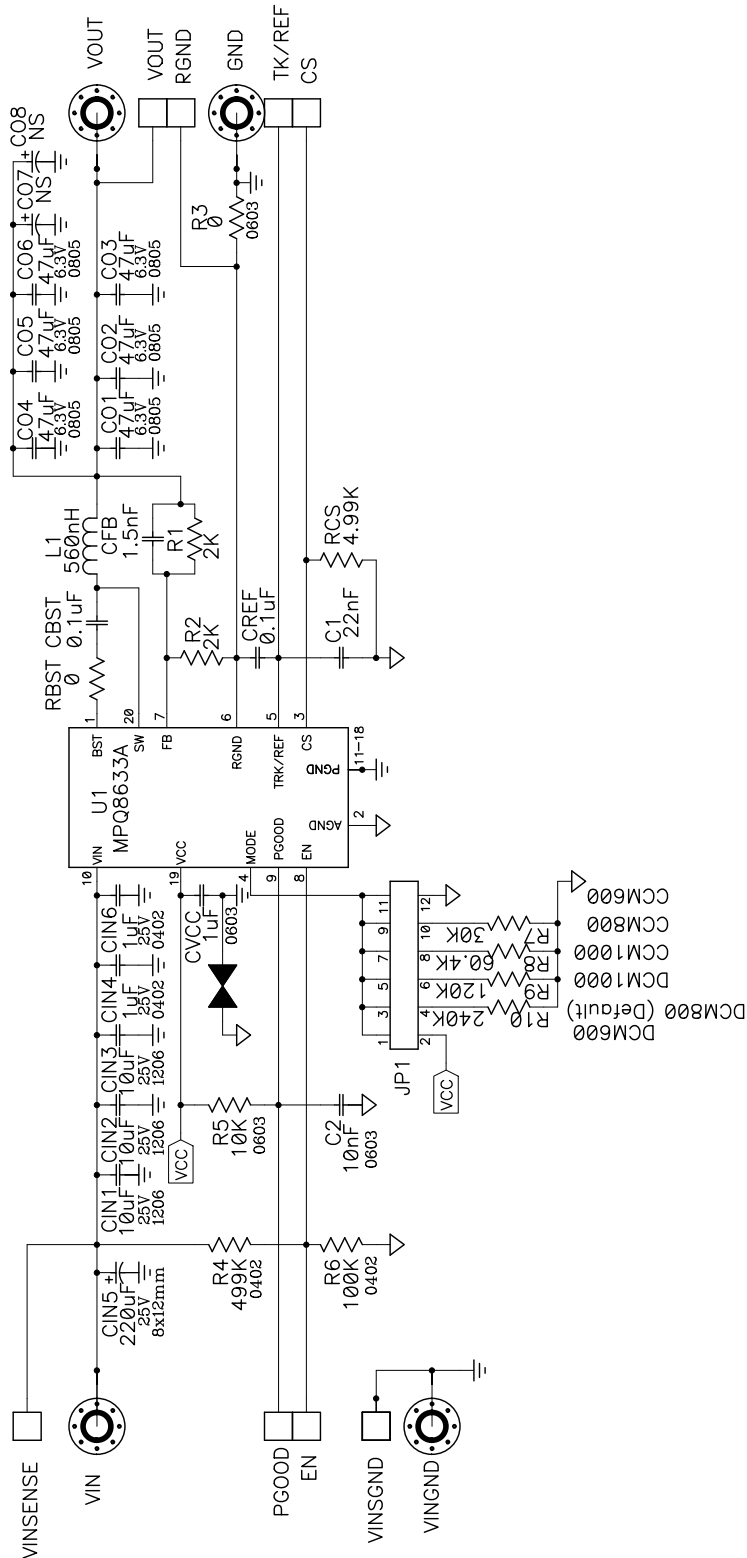



## EVQ8633A-L-01A BILL OF MATERIALS






Qty	Ref	Value	Description	Package	Manufacturer	Part Number
1	C1	22nF	CAP, 25V, 10%, X7R	CAP0603	Generic	
1	C2	10nF	CAP, 25V, 10%, X7R	CAP0603	Generic	
2	CBST, CREF	0.1μF	CAP CER 0.1μF 25V 10% X7R 0603	CAP0603	Generic	
1	CFB	1.5nF	CAP, 50V, 10%, X7R	CAP0603	Generic	
3	CIN1, CIN2, CIN3	10μF	Capacitor, 25V, X7R, 10%	CAP1206	Murata	GRM31CR71E106KA12L
2	CIN4, CIN6	1μF/25V	CAP CER 1μF 25V 10% X6S 0402	CAP0402	muRata	GRM155C81E105KE11D
1	CIN5	220μF	220μF, 25V, 16mOhm ESR	D8P3.5mm	Chemi-Con	APSG250ELL221MHB5S
6	CO1, CO2, CO3, CO4, CO5, CO6	47μF	CAP, 6.3V, X5R, 20%	CAP0805	Murata	GRM21BR60J476ME15L
1	CO7	NS		D2		
1	CO8	NS		D8P3.5mm		
1	CVCC	1μF	CAP CER 1μF 6.3V 10% X7R 0603	CAP0603	Generic	
1	L1	560nH	Inductor ,14A, 2.8mΩ	7x7mm	TOKO	FCUL0630-H-R56M
2	R1, R2	2k	Film Res., 1%	0603	Generic	
2	R3, RBST	0	Film Res., 5%	0603	Generic	
1	R4	499k	Film Res., 1%	0603	Generic	
1	R5	10k	Film Res., 1%	0603	Generic	
1	R6	100k	Film Res., 1%	0603	Generic	
1	R7	30k	Film Res., 1%	0603	Generic	
1	R8	60.4k	Film Res., 1%	0603	Generic	
1	R9	120k	Film Res., 1%	0603	Generic	
1	R10	240k	Film Res., 1%		Generic	
1	RCS	4.99k	Film Res., 1%	0603	Generic	
1	U1	MQ8633A GL	16V/12A Step Down Convert	QFN20- 3x4mm	MPS	MQ8633AGL(R5)



## EVB TEST RESULTS

Performance waveforms are tested on the EVQ8633A-L-01A evaluation board.

$V_{IN} = 12V$ ,  $V_{OUT} = 1.2V$ ,  $L = 560nH$ ,  $T_A = +25^{\circ}C$ , unless otherwise noted.

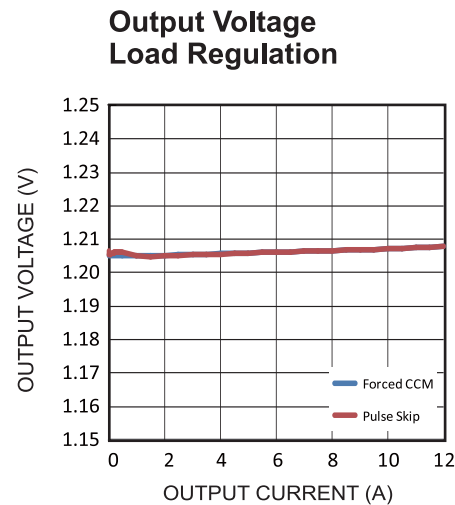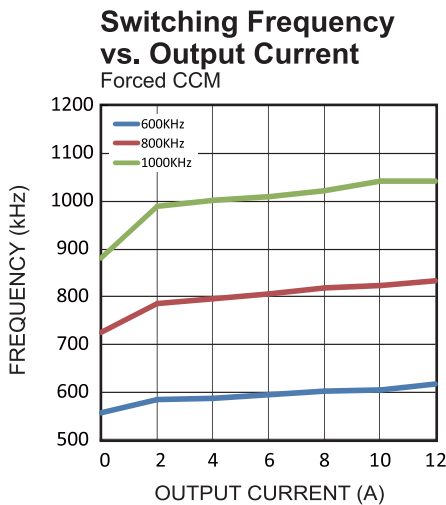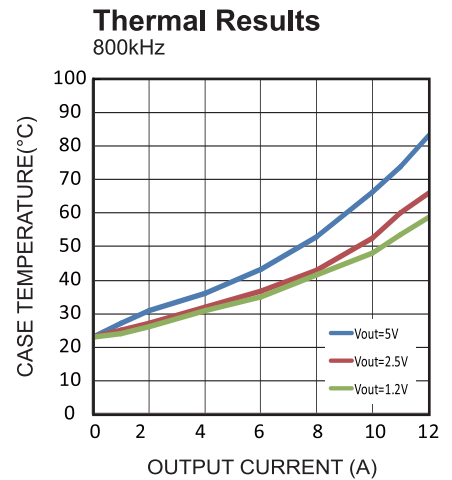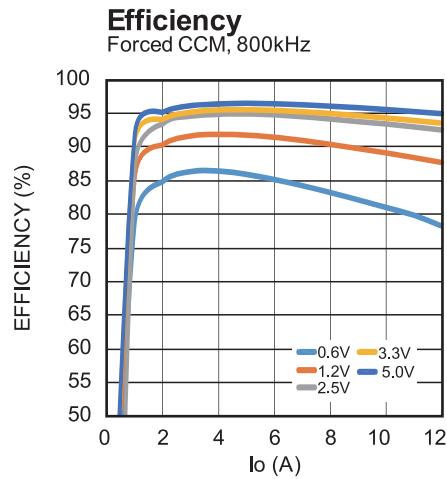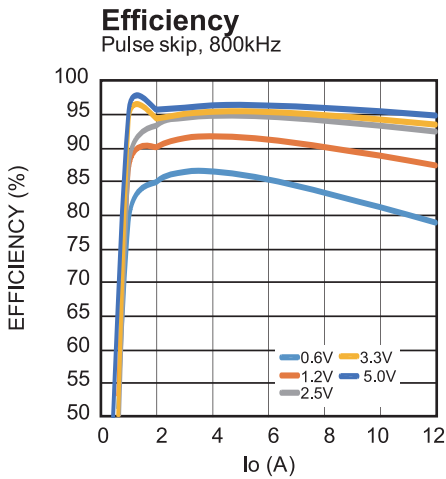




## EVB TEST RESULTS *(continued)*

Performance waveforms are tested on the EVQ8633A-L-00A evaluation board.

$V_{IN} = 12V$ ,  $V_{OUT} = 1.2V$ ,  $L = 560nH$ ,  $T_A = +25^\circ C$ , unless otherwise noted.


### Steady State

$I_{OUT} = 0A$ , Pulse Skip

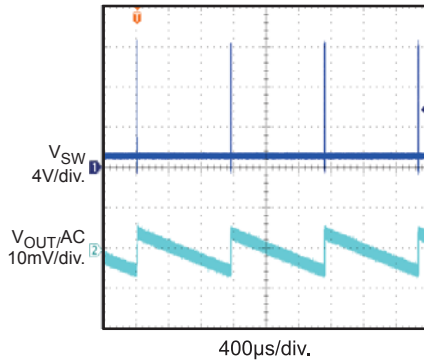


### Steady State

$I_{OUT} = 0.5A$ , Pulse Skip

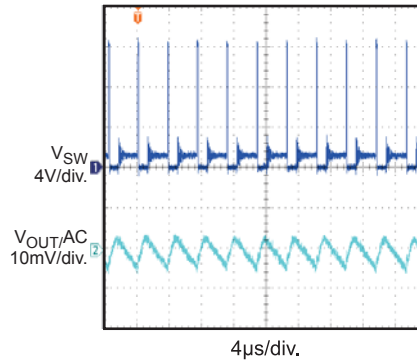


### Steady State

$I_{OUT} = 12A$ , Pulse Skip

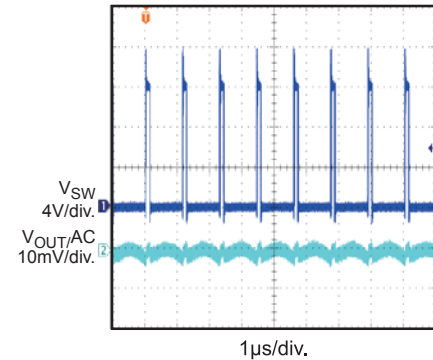


### Steady State

$I_{OUT} = 0A$ , Forced CCM

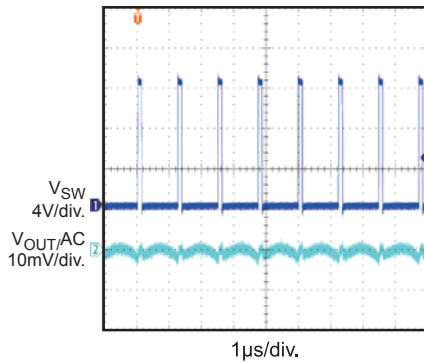


### Steady State

$I_{OUT} = 12A$ , Forced CCM

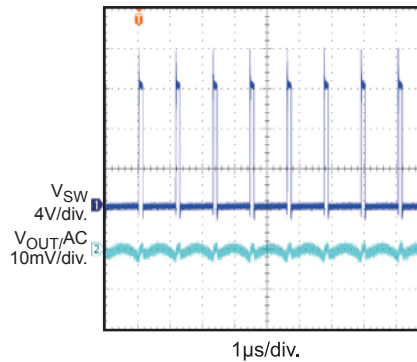


### Load Transient

$I_{OUT} = 0A-6A$ , Pulse Skip

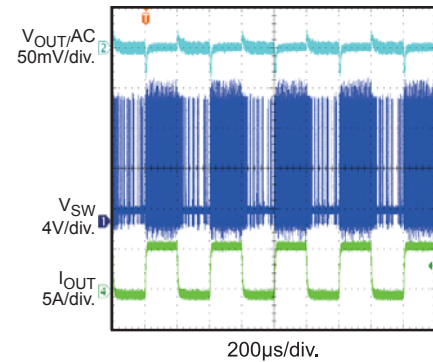


### Load Transient

$I_{OUT} = 0A-6A$ , Forced CCM

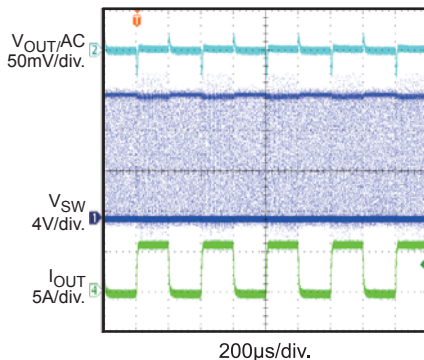


### Power Up through EN

$I_{OUT} = 0A$ , Pulse Skip

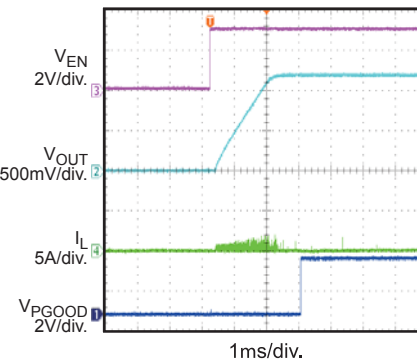

### Power Up through EN

$I_{OUT} = 12A$ , Pulse Skip

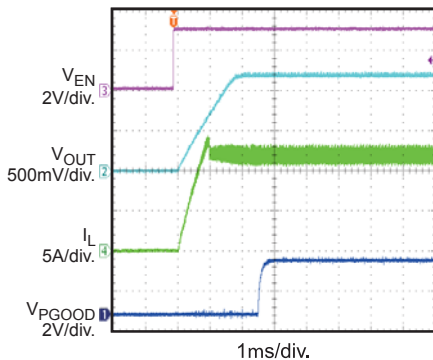




## EVB TEST RESULTS (continued)

Performance waveforms are tested on the EVQ8633A-L-00A evaluation board.

$V_{IN} = 12V$ ,  $V_{OUT} = 1.2V$ ,  $L = 560nH$ ,  $T_A = +25^{\circ}C$ , unless otherwise noted.


**Power Up through EN**

$I_{OUT} = 0A$ , Forced CCM

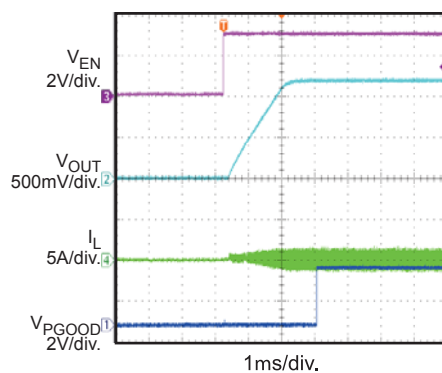


**Power Up through EN**

$I_{OUT} = 12A$ , Forced CCM

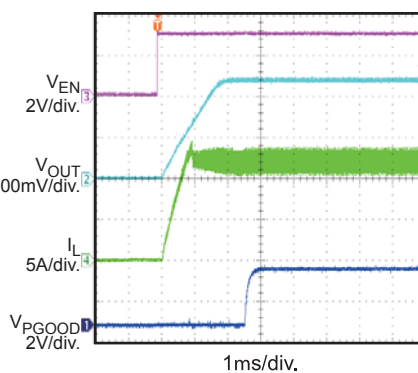


**Power Down through EN**

$I_{OUT} = 0A$ , Pulse Skip

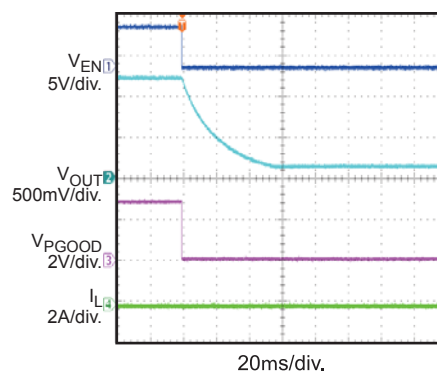


**Power Down through EN**

$I_{OUT} = 12A$ , Pulse Skip

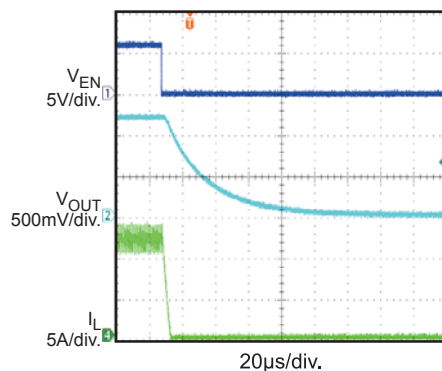


**Power Down through EN**

$I_{OUT} = 0A$ , Forced CCM

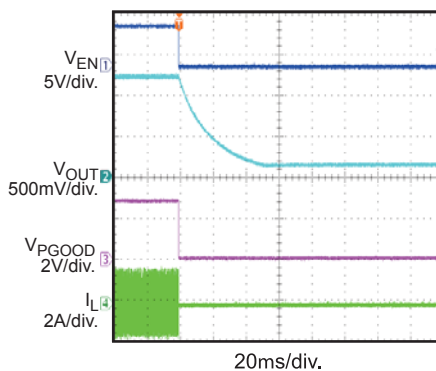


**Power Down through EN**

$I_{OUT} = 12A$ , Forced CCM

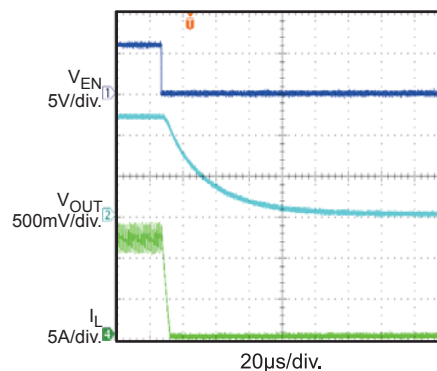


**Pre-bias Start Up**

Pulse Skip

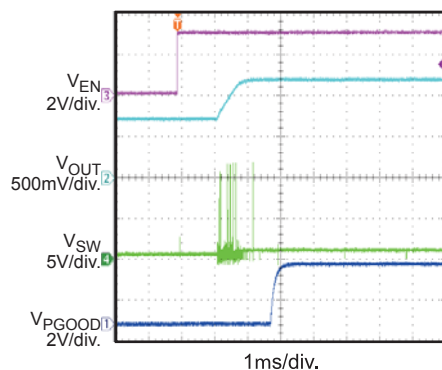


**Pre-bias Start Up**

Forced CCM

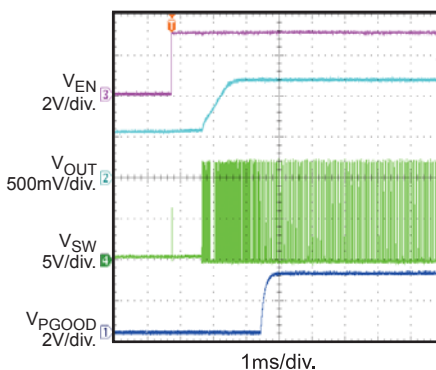

**Over-Current Protection Entry**

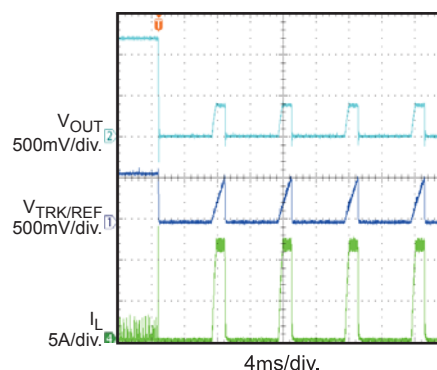






## EVB TEST RESULTS *(continued)*


Performance waveforms are tested on the EVQ8633A-L-00A evaluation board.

$V_{IN} = 12V$ ,  $V_{OUT} = 1.2V$ ,  $L = 560nH$ ,  $T_A = +25^{\circ}C$ , unless otherwise noted.


**Over-Current  
Protection Recovery**

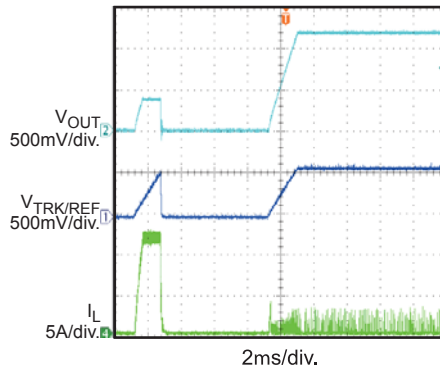


**OSM Operation**  
Pulse Skip Mode

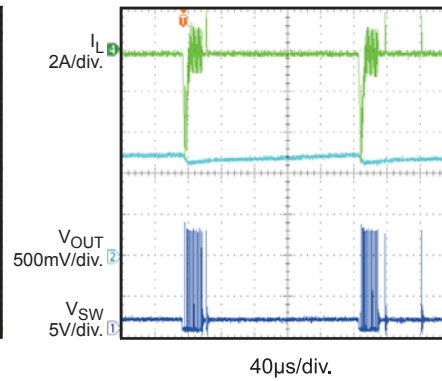

**Over-voltage Protection**  
Pulse Skip Mode

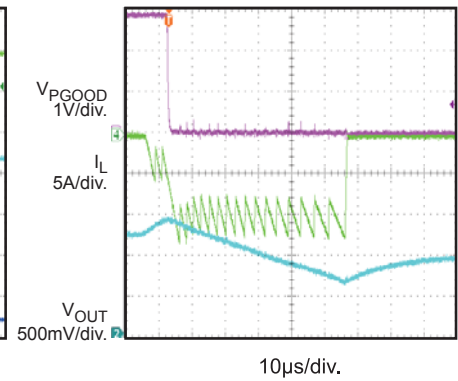


**Over-voltage Protection**  
Forced CCM

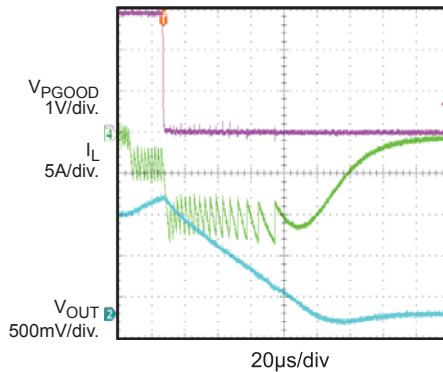





## PRINTED CIRCUIT BOARD LAYOUT

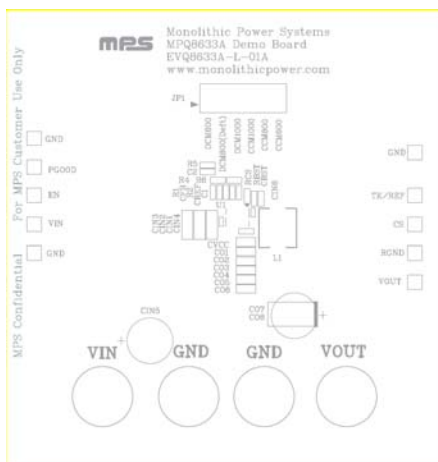


**Figure 1—Top Silk Layer**

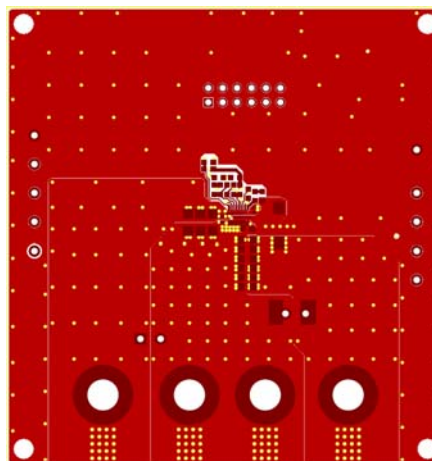


**Figure 2—Top Layer**

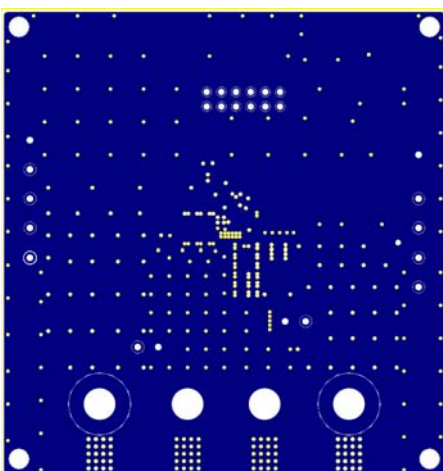

**Figure 3—Inner Layer 1**

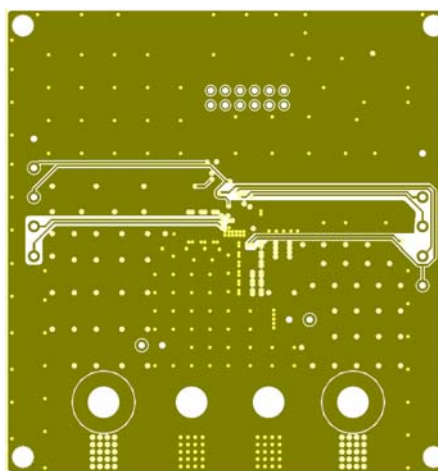

**Figure 4— Inner Layer 2**

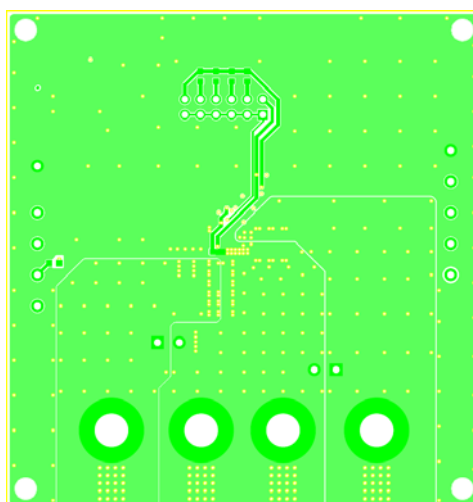

**Figure 5—Bottom Layer**



## **QUICK START GUIDE**

The input voltage of the EV board can range from 8V to 16V. The minimum 8V input voltage is limited by the EN signal, which is derived from VIN through a resistor divider (R4 and R6). Lower input voltage (as low as 2.7V with external 3.3V VCC bias) can be set by fine tuning the resistor divider values, or by over-driving the EN with an external control signal. The following is the procedure to turn on the EV board.

1. Connect the positive and negative terminals of the load to the VOUT and GND pins, respectively.
2. Preset the power supply output voltage between 8V and 16V, and then turn off the power supply.
3. Connect the positive and negative terminals of the power supply output to the VIN and GND pins, respectively. Make sure the power supply has high enough current limit to supply the power.
4. Turn the power supply on. The EVQ8633A-L-01A will automatically startup.
5. To use the Enable function, apply a digital input to the EN pin. Drive EN higher than 1.5V to turn on the regulator or less than 0.8V to turn it off.
6. Use R1 and R2 to set the output voltage with  $V_{FB} = 0.6\text{ V}$ . Follow the Application Information section in the device datasheet to select the proper values of R1, R2, inductor and output capacitor values when output voltage is changed.
7. The JP1 jumper can be used to select the operating frequency (600kHz, 800kHz and 1000kHz) and light load operation mode (Pulse Skip/DCM and CCM).

**NOTICE:** The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.