




DSK12 - DSK120

Schottky Rectifiers

SOD-123FL

Features

- Metal to silicon rectifier, majority carrier conduction.
- For use in low voltage, high frequency inverters free wheeling, and polarity protection applications.
- Low power loss, high efficiency.
- High current capability, low V_F .
- High surge capacity.
- Glass passivated

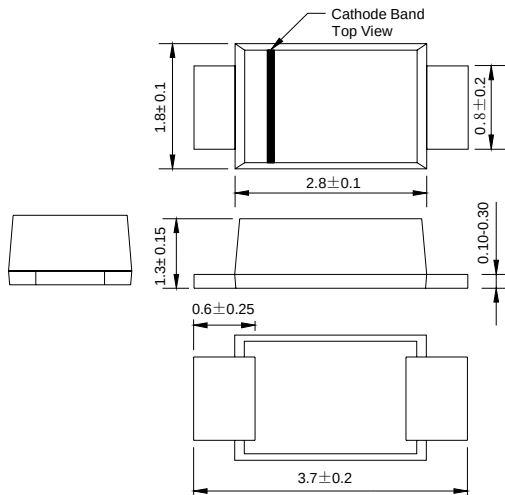

Dimensions in millimeters

Absolute Maximum Ratings

$T_A = 25^\circ\text{C}$ unless otherwise noted

CHARACTERISTICS	SYMBOL	DSK12	DSK13	DSK14	DSK15	DSK16	DSK18	DSK110	DSK115	DSK120	UNIT
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	80	100	150	200	V
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	56	70	100	125	V
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	80	100	150	200	V
Maximum Average Forward Rectified Current @ $T_L = 100^\circ\text{C}$	$I_{(AV)}$	1.0									A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed On Rated Load (JEDEC Method)	I_{FSM}	30									A
Maximum Forward Voltage at 1.0A DC	V_F	0.45	0.5	0.55	0.7		0.85	0.92	0.95		V
Maximum DC Reverse Current at Rated DC Blocking Voltage @ $T_J = 25^\circ\text{C}$ @ $T_J = 100^\circ\text{C}$	I_R	1.0 20									mA
Typical Junction Capacitance (Note1)	C_J	200									pF
Typical Thermal Resistance (Note2)	$R_{\theta JL}$	15									$^\circ\text{C/W}$
Operating Temperature Range	T_J	-55 to +150									$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150									$^\circ\text{C}$

TYPICAL CHARACTERISTICS ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)

DSK12 - DSK120

FIG.1- PEAK FORWARD SURGE CURRENT

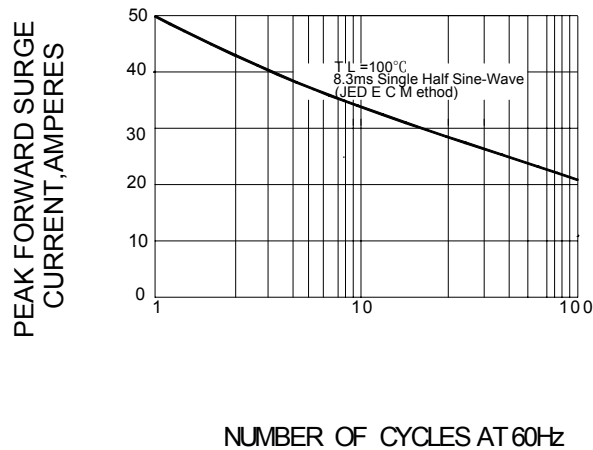


FIG 2 – TYPICAL FORWARD CHARACTERISTICS

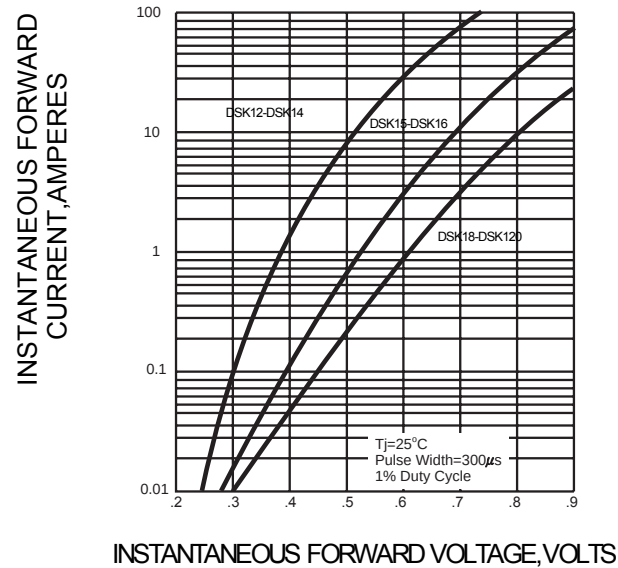


FIG.3 – TYPICAL REVERSE CHARACTERISTICS

