


SIGN	DATE	DESCRIPTION	APPROVER
△			
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			



DIMENSION

Dim A	NX5.08
Dim B	(N-1)X5.08

N=Number of contacts


Poles	Tolerance
2p-6p	±0.15
7p-12p	±0.20
13p-18p	±0.25
19p-24p	±0.30

Material



- Item 1 Terminal housing : Thermoplastic (UL94V-0)
- Item 2 Clamp : Brass , Ni plated
- Item 3 Wire guard solder pin : Tin plated
- Item 4 Terminal screw: Steel , Zinc plating "--" slot type

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
 - Solid wire(AWG): 12-24
 - Stranded wire(AWG): 12-24
- Torque(Lb-In): 3.5
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: 

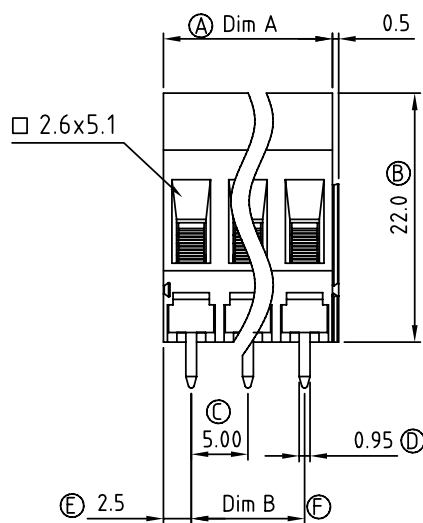

N=Number of contacts

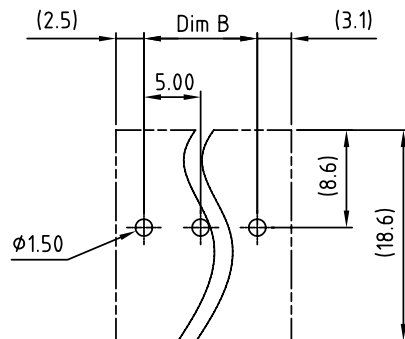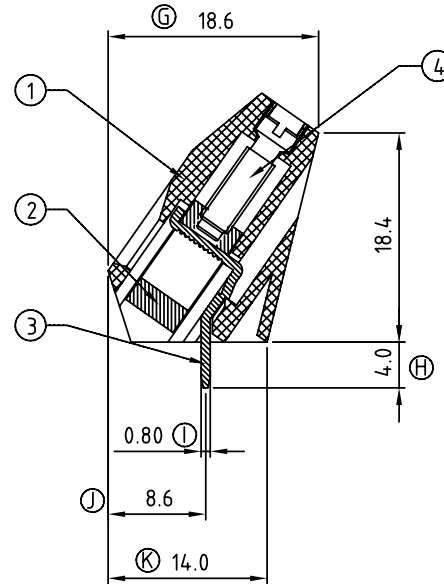

P.C.B. LAYOUT

TP xx 0 1 x 0 xxxx G

02 2 CONTACTS	0 Black	0000 "@Logo	RoHS
03 3 CONTACTS	5 Green	000A "ANYTEK"Logo	Pb<40,000ppm
... ..	6 Blue	Any special item by	
24 24 CONTACTS	8 Grey	customer request,	
		please contact sales	
		department.	

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TP 5.0 mm SERIES						
PART NO.	TPxx01x0xxxxG				DWG NO.	8TP0002	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Aaron 2009.11.10	xionghaitao 2006.02.11		UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
				SHEET: 01/01	REV: C	X.XX	±0.10
						X°	±1°