THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.- .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED PER ECO-16-006380	17JUN2016	NK	MZ
	C	REVISED PER ECO-19-011232	06AUG2019	RS	MZ

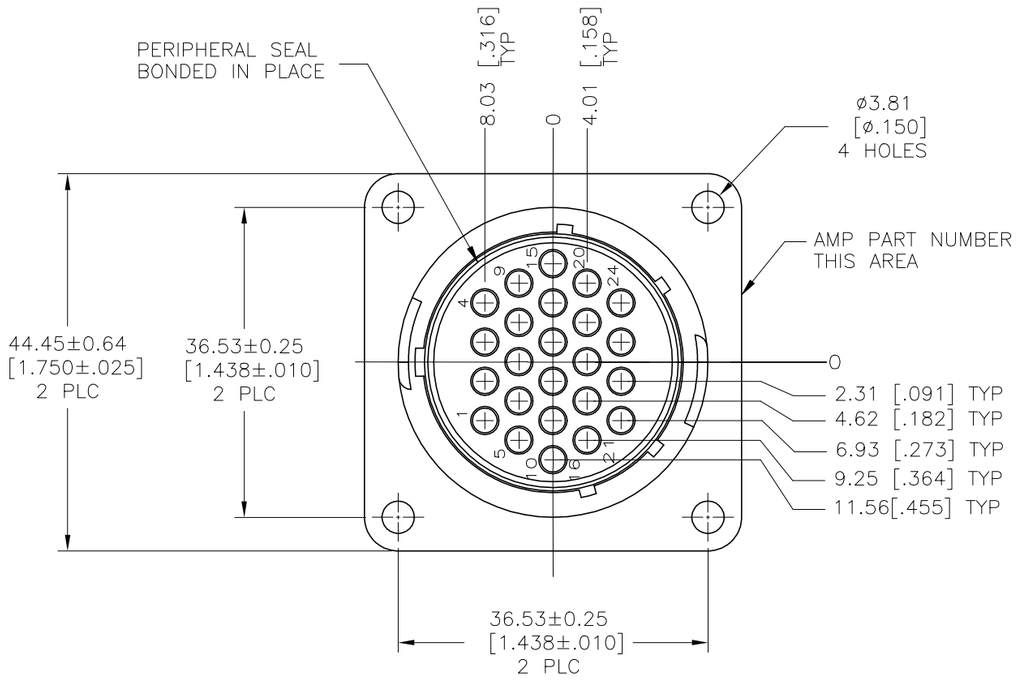

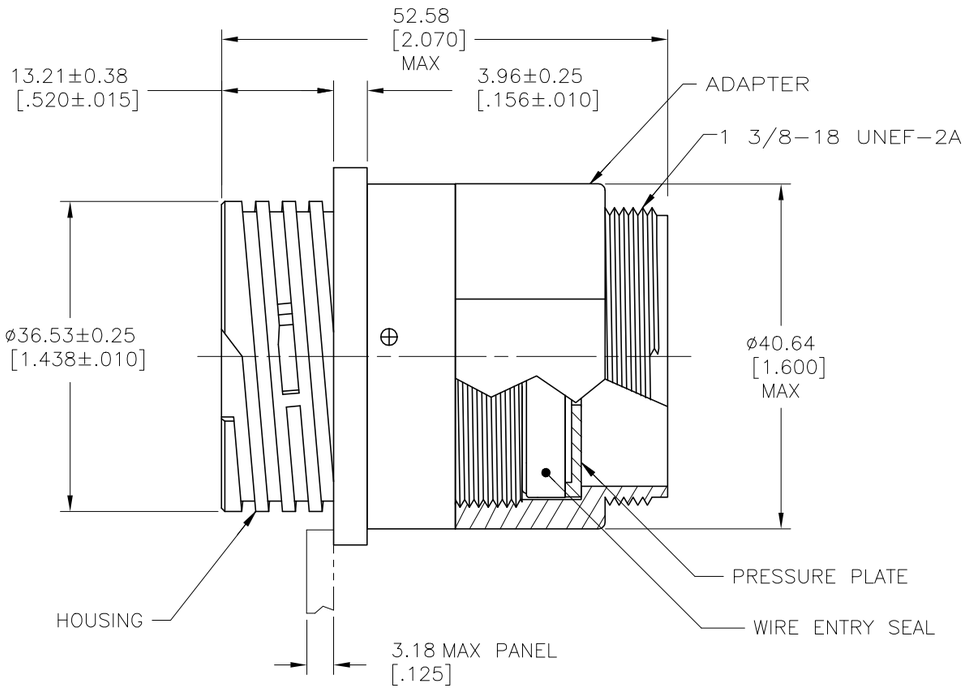

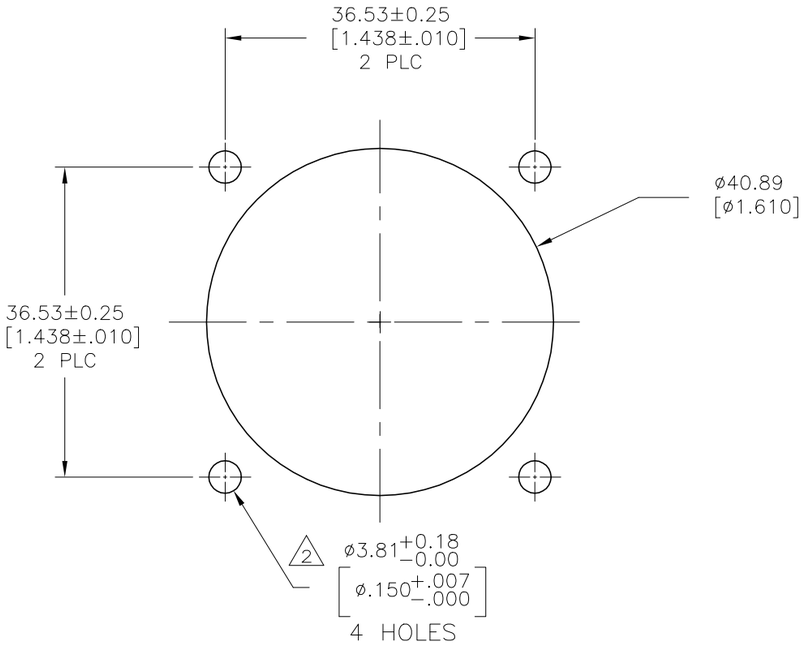

RECOMMENDED PANEL CUTOUT

1. HOUSING, ADAPTER AND PRESSURE PLATE: NYLON, BLACK.
   WIRE ENTRY SEAL: ELASTOMER, RED–IRON OXIDE.
   PERIPHERAL SEAL: ELASTOMER, BLACK.
2. NUMBER 4 FASTENERS RECOMMENDED FOR MOUNTING.
3. CONNECTOR WILL ACCEPT (24) MULTIMATE PIN CONTACTS.

1.65–2.54[.065–.100]	796190–1
WIRE INSULATION DIAMETER RANGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.13 [.005]
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL 1

FINISH –

DWN C.DORWART 16 JUL 98
CHK K.DOWHOWER 10 AUG 99
APVD K.DOWHOWER 10 AUG 99
PRODUCT SPEC 108–1579
APPLICATION SPEC –
WEIGHT –

TE Connectivity

NAME RECEPTACLE ASSEMBLY, STANDARD SEX, SIZE 23–24, SEALED CPC

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-796190	–

CUSTOMER DRAWING | SCALE 2:1 | SHEET 1 OF 1 | REV C

796190