
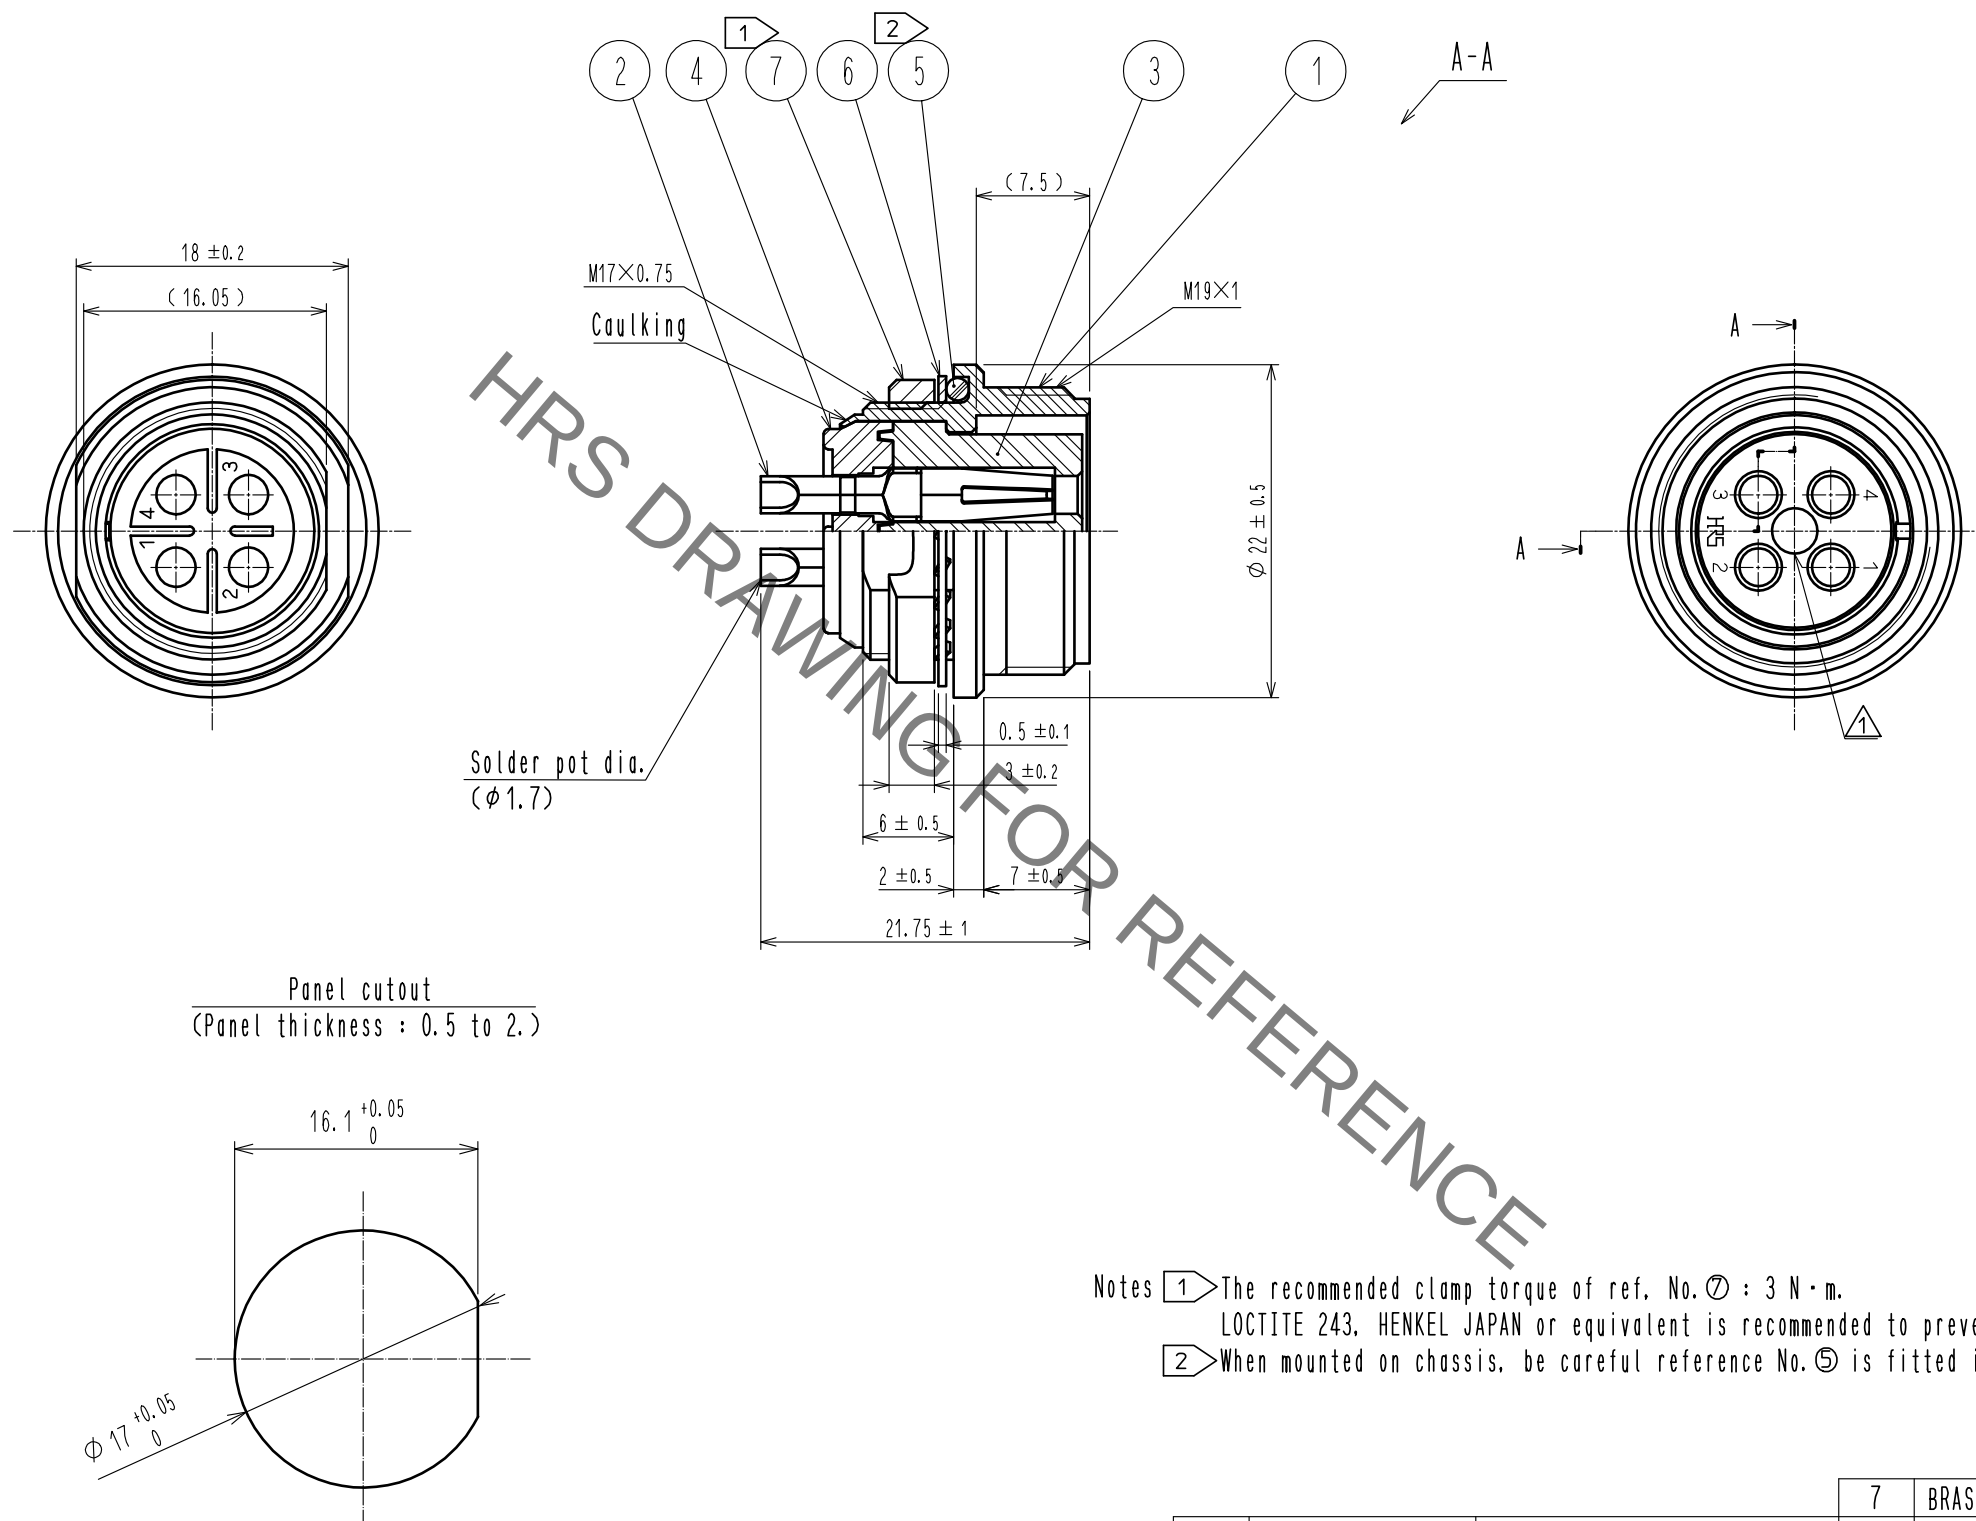


Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



- Notes
- 1 The recommended clamp torque of ref. No. ⑦ : 3 N · m.
LOCTITE 243, HENKEL JAPAN or equivalent is recommended to prevent ref. No. ⑦ from loosening.
 - 2 When mounted on chassis, be careful reference No. ⑤ is fitted into the indicates groove any biting.

3	PPS	(BLACK)	UL94V-0	7	BRASS	NICKEL PLATING			
2	COPPER ALLOY	SILVER PLATING	2 μm min.	6	PHOSPHOR BRONZE	NICKEL PLATING			
1	ZINC ALLOY	CHROME PLATING		5	SILICONE RUBBER	(BLACK)			
				4	PPS	(BLACK) UL94V-0			
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 2 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-C-00000841		DESIGNED KN. IKEHARA	CHECKED HY. KOBAYASHI	DATE 16. 03. 02
 HIROSE ELECTRIC CO., LTD.	APPROVED : HY. KOBAYASHI				15. 11. 06	DRAWING NO. EDC-111079-81-00			
	CHECKED : HY. KOBAYASHI				15. 11. 06	PART NO. RM15WTRZ-4S(81)			
	DESIGNED : KN. IKEHARA				15. 11. 06	CODE NO. CL109-1639-4-81			
	DRAWN : KN. IKEHARA				15. 11. 06	 			