

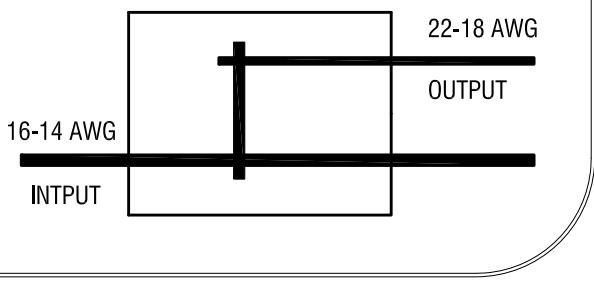


SCHEMATIC

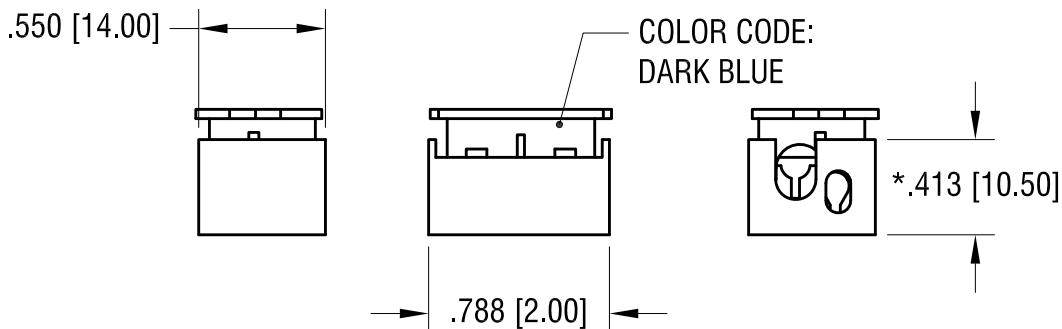

THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP., AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

ACTUAL SIZE:



NOTE:

1. INSULATION: MAT'L- POLYCARBONATE, LEXAN UL 94V-0
2. CONTACT: MAT'L- COPPER ALLOY
FINISH- TIN PLATE, OVER NICKEL PLATE
3. FOR WIRE: SOLID WIRE
WIRE SIZE: 16 AWG MIN. - 14 AWG MAX., INPUT
22 AWG MIN. - 18 AWG MAX., OUTPUT
4. RATED VOLTAGE 300V
RATED CURRENT: 5A

* HEIGHT OF CLOSED CONNECTOR

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME

T - SERIES WIRE CONNECTOR

MATERIAL

AS NOTED

FINISH	AS NOTED		DRN BY	DATE
APP'D	NT	RH	SCALE	1.06.17
DECIMAL	± .010	[± 0.25]	CODE	1.2X
ANGULAR	± 1°		DWG NO.	
	UNLESS OTHERWISE SPECIFIED		C	8383

10.13.22 PARTS ARE NO LONGER UL LISTED
CHANGE AS PER ECN 22-160

A

DATE

DESCRIPTION

REV.